


OIL ANALYSIS REPORT

Sample Rating Trend



VIS DEBRIS



Machine Id

KAESER 6691940

Component Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Aprzuzz	Aprzuz4		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA015077	KCP44561	
Sample Date		Client Info		03 Apr 2024	13 Apr 2022	
Machine Age	hrs	Client Info		21375	11749	
Oil Age	hrs	Client Info		11817	2411	
Oil Changed		Client Info		Changed	Not Changd	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	4	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	0	4	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m	>50	29	8	
Tin	ppm	ASTM D5185m	>10	0	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	
Barium	ppm	ASTM D5185m	90	0	0	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m	90	0	7	
Calcium	ppm	ASTM D5185m	2	0	0	
Phosphorus	ppm	ASTM D5185m		<1	12	
Zinc	ppm	ASTM D5185m		0	68	
Sulfur	ppm	ASTM D5185m		12689	15440	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	
Sodium	ppm	ASTM D5185m		2	11	
Potassium	ppm	ASTM D5185m	>20	0	7	
Water	%	ASTM D6304	>0.05	0.003	0.011	
ppm Water	ppm	ASTM D6304	>500	34	110.4	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647			7454	
Particles >6µm		ASTM D7647	>1300		<u>\$\infty\$ 2572</u>	
Particles >14μm		ASTM D7647	>80		△ 303	
Particles >21µm		ASTM D7647	>20		<u>110</u>	
Particles >38µm		ASTM D7647	>4		<u>^</u> 7	
Particles >71µm		ASTM D7647	>3		0	
Oil Cleanliness		ISO 4406 (c)	>/17/13		△ 19/15	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.37	0.29	



OIL ANALYSIS REPORT

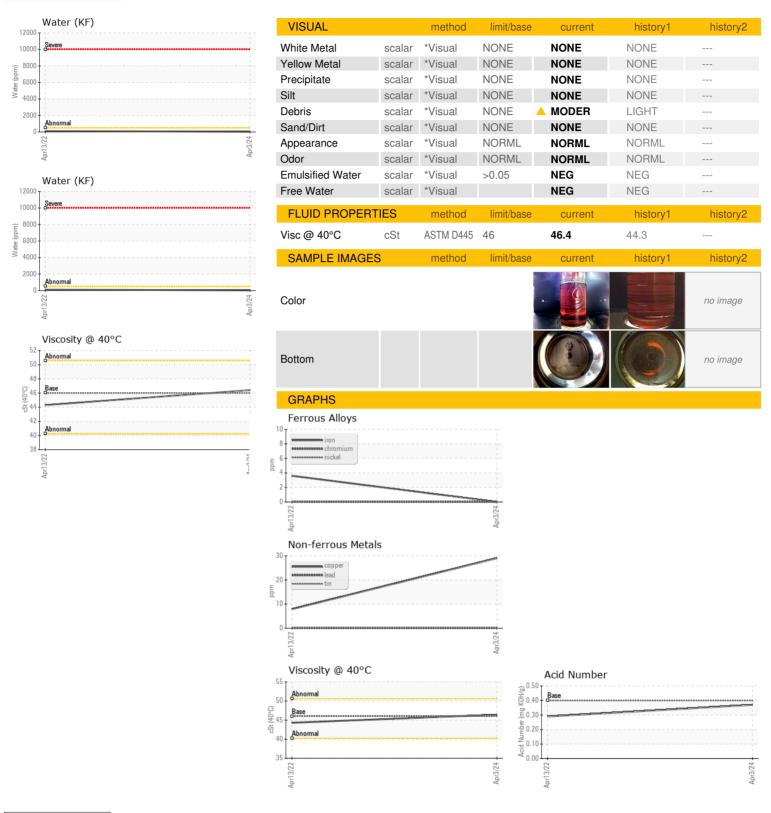





Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA015077 Lab Number : 06149525

Unique Number : 10979603

Diagnosed Test Package : IND 2 (Additional Tests: KF, PrtCount)

Received

Tested

: 15 Apr 2024

: 17 Apr 2024

: 17 Apr 2024 - Don Baldridge

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

PENSKE TRUCK LEASING

814 PICKETTVILLE RD JACKSONVILLE, FL US 32220

Contact: JAMES LEIMBACH james.leimbach@penske.com

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: