


OIL ANALYSIS REPORT



Machine Id
CATERPILLAR 980K 6058 (S/N W7K00517)
 Component
Front Left Planetary
 Fluid
TULCO LUBSOIL TO-4 50 (5 GAL)

Sample Rating Trend

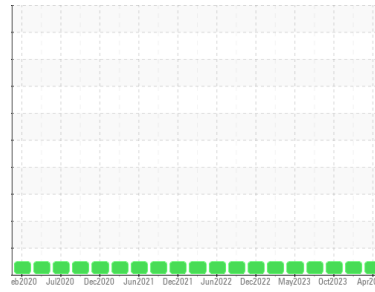

NORMAL

DIAGNOSIS

- Recommendation**
 Resample at the next service interval to monitor.
- Wear**
 All component wear rates are normal.
- Contamination**
 There is no indication of any contamination in the oil.
- Fluid Condition**
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method limit/base current history1 history2

Sample Number	Client Info		TO10003316	TO10002976	TO10002780
Sample Date	Client Info		06 Apr 2024	26 Jan 2024	20 Oct 2023
Machine Age	hrs	Client Info	19983	19449	18890
Oil Age	hrs	Client Info	5168	4634	4075
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION method limit/base current history1 history2

Water	WC Method	>0.2	NEG	NEG	NEG
-------	-----------	------	------------	-----	-----

WEAR METALS method limit/base current history1 history2

PQ		ASTM D8184		47	52	43
Iron	ppm	ASTM D5185m	>500	38	39	37
Chromium	ppm	ASTM D5185m	>10	0	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	4	5	5
Lead	ppm	ASTM D5185m	>25	0	<1	0
Copper	ppm	ASTM D5185m	>75	4	3	4
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0

ADDITIVES method limit/base current history1 history2

Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		14	19	0
Calcium	ppm	ASTM D5185m		3902	4153	4125
Phosphorus	ppm	ASTM D5185m		681	844	779
Zinc	ppm	ASTM D5185m		821	980	941
Sulfur	ppm	ASTM D5185m		4502	4803	4391





CONTAMINANTS method limit/base current history1 history2

Silicon	ppm	ASTM D5185m	>75	16	17	17
Sodium	ppm	ASTM D5185m		6	4	5
Potassium	ppm	ASTM D5185m	>20	0	<1	0

FLUID DEGRADATION method limit/base current history1 history2

Acid Number (AN)	mg KOH/g	ASTM D8045		0.90	0.79	0.81
------------------	----------	------------	--	-------------	------	------

OIL ANALYSIS REPORT

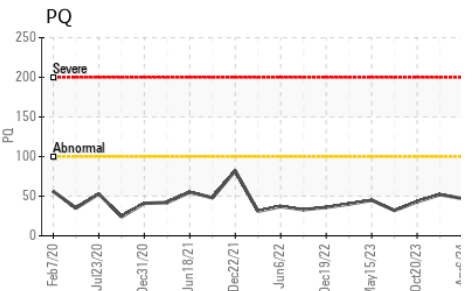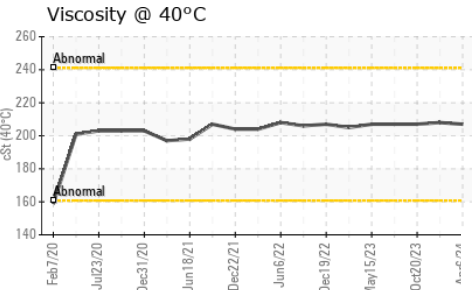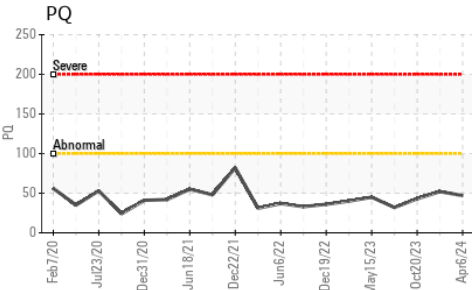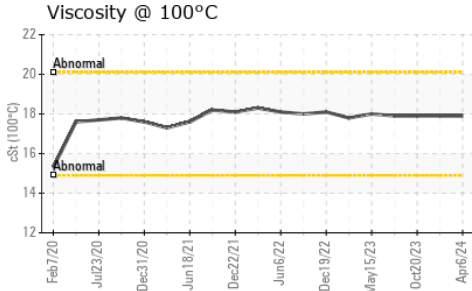









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	207	208	207
Visc @ 100°C	cSt	ASTM D445	17.9	17.9	17.9
Viscosity Index (VI)	Scale	ASTM D2270	94	93	94

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

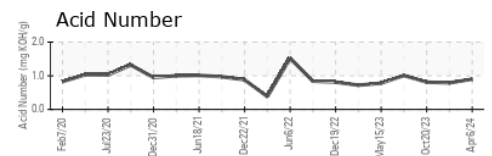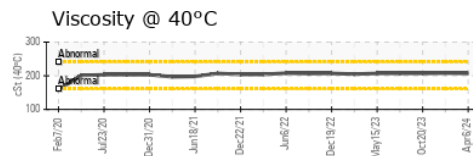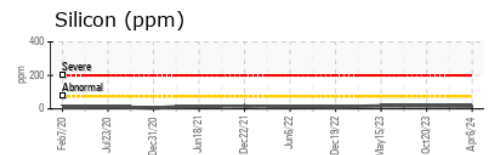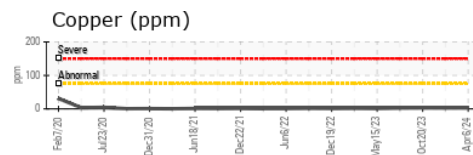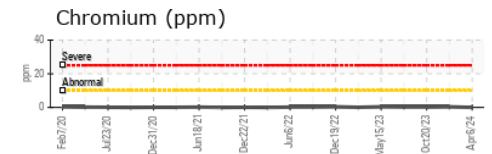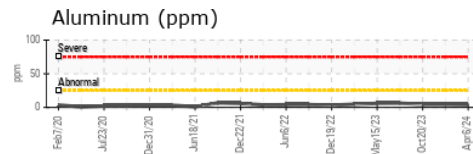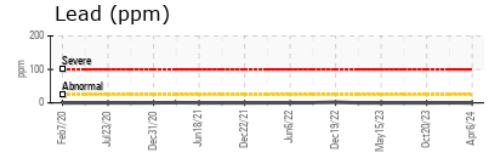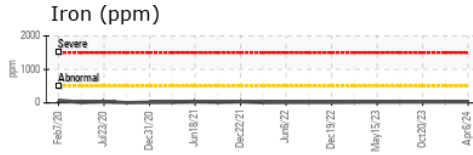

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : TO10003316

Lab Number : 06149566

Unique Number : 10979644

Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 15 Apr 2024

Tested : 16 Apr 2024

Diagnosed : 16 Apr 2024 - Wes Davis

ANCHOR STONE TULSA ROCK

TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE

TULSA, OK

US 74137

Contact: MIKE SNYDER

msnyder@anchorstoneco.com

T: (417)850-9635

F: