


OIL ANALYSIS REPORT

Sample Rating Trend







Machine Id

O-6
Component
Diesel Engine
Fluid
5W30 FULL SYN (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Client Info 27 Mar 2024 07 Feb 2024 27 Dec 2023 Machine Age mis Client Info 21535 16526 11404 Machine Age mis Client Info 5009 5122 5000 N/A N/A			Oct202	3 Dec2023	Feb 2024 M	ar2024	
Client Info 27 Mar 2024 07 Feb 2024 27 Dec 2023 Machine Age mis Client Info 21535 16526 11404 Machine Age mis Client Info 5009 5122 5000 Mis Mis	SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Machine Age mils Client Info 21535 16526 11404	Sample Number		Client Info		WC0871808	WC0871821	WC0871813
Machine Age mis Client Info 21535 16526 11404	Sample Date		Client Info		27 Mar 2024	07 Feb 2024	27 Dec 2023
Oil Changed Client Info N/A N/A N/A NORMAL	Machine Age	mls	Client Info		21535	16526	11404
Oil Changed Client Info N/A N/A N/A NORMAL	Oil Age	mls	Client Info		5009	5122	5000
Fuel	Oil Changed		Client Info		N/A	N/A	N/A
Fuel WC Method S5	Sample Status				NORMAL	NORMAL	NORMAL
Water Glycol WC Method WC Method >0.2 NEG NEG NEG NEG NEG NEG NEG WEAR METALS method limit/base current history1 history2 Iron ppm ASTM D5185m >100 7 9 22 Chromium ppm ASTM D5185m >20 <1 <1 <1 Nickel ppm ASTM D5185m >4 0 0 <1 Nickel ppm ASTM D5185m >4 0 0 <1 Titanium ppm ASTM D5185m >3 0 0 0 Silver ppm ASTM D5185m >20 3 6 7 Lead ppm ASTM D5185m >30 0 0 <1 Copper ppm ASTM D5185m >330 2 4 14 Tin ppm ASTM D5185m 0 0 0 <1 Vanadium ppm ASTM D5185m 0 0 0 <	CONTAMINATIO	N	method	limit/base	current	history1	history2
WEAR METALS	Fuel		WC Method	>5	<1.0	<1.0	<1.0
WEAR METALS method limit/base current history1 history2 Iron ppm ASTM D5185m >100 7 9 22 Chromium ppm ASTM D5185m >20 <1 <1 <1 Nickel ppm ASTM D5185m >20 0 0 <1 Titanium ppm ASTM D5185m >3 0 0 0 Aluminum ppm ASTM D5185m >3 0 0 0 Lead ppm ASTM D5185m >20 3 6 7 Lead ppm ASTM D5185m >30 2 4 14 Tin ppm ASTM D5185m >330 2 4 14 Tin ppm ASTM D5185m 0 0 0 <1 Vanadium ppm ASTM D5185m 0 0 <1 1 1 <1 1 0 0 <1 1 0	Water		WC Method	>0.2	NEG	NEG	NEG
Iron	Glycol		WC Method		NEG	NEG	NEG
Chromium ppm ASTM D5185m ≥20 <1	WEAR METALS		method	limit/base	current	history1	history2
Nickel	Iron	ppm	ASTM D5185m	>100	7	9	22
Titanium	Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Silver	Nickel	ppm	ASTM D5185m	>4	0	0	<1
Aluminum	Titanium	ppm	ASTM D5185m		0	0	<1
Lead	Silver	ppm	ASTM D5185m	>3	0	0	0
Copper ppm ASTM D5185m >330 2 4 14 Tin ppm ASTM D5185m >15 1 <1 1 Vanadium ppm ASTM D5185m 0 0 0 Cadmium ppm ASTM D5185m 0 0 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185m 33 27 25 Barium ppm ASTM D5185m <1 0 0 Molybdenum ppm ASTM D5185m 240 245 264 Manganese ppm ASTM D5185m <1 <1 2 Magnesium ppm ASTM D5185m 477 439 478 Calcium ppm ASTM D5185m 1351 1172 1329 Phosphorus ppm ASTM D5185m 753 740 814 Sulfur ppm ASTM D5185m 2374 1731	Aluminum	ppm	ASTM D5185m	>20	3	6	7
Tin	Lead	ppm	ASTM D5185m	>40	0	0	<1
Vanadium ppm ASTM D5185m 0 0 0 Cadmium ppm ASTM D5185m 0 0 <1	Copper	ppm	ASTM D5185m	>330	2	4	14
Cadmium ppm ASTM D5185m 0 0 <1	Tin	ppm	ASTM D5185m	>15	1	<1	1
ADDITIVES	Vanadium	ppm	ASTM D5185m		0	0	0
Boron	Cadmium	ppm	ASTM D5185m		0	0	<1
Barium ppm ASTM D5185m <1	ADDITIVES		method	limit/base	current	history1	history2
Molybdenum ppm ASTM D5185m 240 245 264 Manganese ppm ASTM D5185m <1	Boron	ppm	ASTM D5185m		33	27	25
Manganese ppm ASTM D5185m <1	Barium	ppm	ASTM D5185m		<1	0	0
Magnesium ppm ASTM D5185m 477 439 478 Calcium ppm ASTM D5185m 1351 1172 1329 Phosphorus ppm ASTM D5185m 610 583 610 Zinc ppm ASTM D5185m 753 740 814 Sulfur ppm ASTM D5185m 2374 1731 1767 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 17 20 29 Sodium ppm ASTM D5185m <1 1 0 Potassium ppm ASTM D5185m >20 1 <1 3 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 >3 0 0 0 Nitration Abs/.1mm *ASTM D7624 >20 9.4 10.3 10.7 Sulfation	Molybdenum	ppm	ASTM D5185m		240	245	264
Calcium ppm ASTM D5185m 1351 1172 1329 Phosphorus ppm ASTM D5185m 610 583 610 Zinc ppm ASTM D5185m 753 740 814 Sulfur ppm ASTM D5185m 2374 1731 1767 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 17 20 29 Sodium ppm ASTM D5185m >20 1 1 0 Potassium ppm ASTM D5185m >20 1 <1 3 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 >3 0 0 0 Nitration Abs/.1mm *ASTM D7415 >30 20.2 21.3 21.2 FLUID DEGRADATION method limit/base current history1 history2 <th>Manganese</th> <th>ppm</th> <th>ASTM D5185m</th> <th></th> <th><1</th> <th><1</th> <th>2</th>	Manganese	ppm	ASTM D5185m		<1	<1	2
Phosphorus ppm ASTM D5185m 610 583 610 Zinc ppm ASTM D5185m 753 740 814 Sulfur ppm ASTM D5185m 2374 1731 1767 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 17 20 29 Sodium ppm ASTM D5185m >20 1 1 0 Potassium ppm ASTM D5185m >20 1 <1	Magnesium	ppm	ASTM D5185m		477	439	478
Zinc ppm ASTM D5185m 753 740 814 Sulfur ppm ASTM D5185m 2374 1731 1767 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 17 20 29 Sodium ppm ASTM D5185m <1 1 0 Potassium ppm ASTM D5185m >20 1 <1 3 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 >3 0 0 0 Nitration Abs/cm *ASTM D7624 >20 9.4 10.3 10.7 Sulfation Abs/.1mm *ASTM D7415 >30 20.2 21.3 21.2 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 13.8 16.2 <th>Calcium</th> <th>ppm</th> <th>ASTM D5185m</th> <th></th> <th>1351</th> <th>1172</th> <th>1329</th>	Calcium	ppm	ASTM D5185m		1351	1172	1329
Sulfur ppm ASTM D5185m 2374 1731 1767 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 17 20 29 Sodium ppm ASTM D5185m <1 1 0 Potassium ppm ASTM D5185m >20 1 <1 3 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 >3 0 0 0 Nitration Abs/cm *ASTM D7624 >20 9.4 10.3 10.7 Sulfation Abs/.1mm *ASTM D7415 >30 20.2 21.3 21.2 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 13.8 16.2 16.9 Acid Number (AN) mg KOH/g ASTM D8045 1.38	Phosphorus	ppm	ASTM D5185m		610	583	610
CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >25 17 20 29 Sodium ppm ASTM D5185m <1 1 0 Potassium ppm ASTM D5185m >20 1 <1 3 INFRA-RED method limit/base current history1 history2 Soot % % *ASTM D7844 >3 0 0 0 Nitration Abs/cm *ASTM D7624 >20 9.4 10.3 10.7 Sulfation Abs/.1mm *ASTM D7415 >30 20.2 21.3 21.2 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 13.8 16.2 16.9 Acid Number (AN) mg KOH/g ASTM D8045 1.38 0.59 1.42	Zinc	ppm	ASTM D5185m		753	740	814
Silicon ppm ASTM D5185m >25 17 20 29 Sodium ppm ASTM D5185m <1	Sulfur	ppm	ASTM D5185m		2374	1731	1767
Sodium ppm ASTM D5185m <1	CONTAMINANTS	;	method	limit/base	current	history1	history2
Potassium ppm ASTM D5185m >20 1 <1	Silicon	ppm	ASTM D5185m	>25	17	20	29
INFRA-RED	Sodium	ppm	ASTM D5185m		<1	1	0
Soot % % *ASTM D7844 >3 0 0 0 Nitration Abs/cm *ASTM D7624 >20 9.4 10.3 10.7 Sulfation Abs/.1mm *ASTM D7415 >30 20.2 21.3 21.2 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 13.8 16.2 16.9 Acid Number (AN) mg KOH/g ASTM D8045 1.38 0.59 1.42	Potassium	ppm	ASTM D5185m	>20	1	<1	3
Nitration Abs/cm *ASTM D7624 >20 9.4 10.3 10.7 Sulfation Abs/.1mm *ASTM D7415 >30 20.2 21.3 21.2 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 13.8 16.2 16.9 Acid Number (AN) mg KOH/g ASTM D8045 1.38 0.59 1.42	INFRA-RED		method	limit/base	current	history1	history2
Sulfation Abs/.1mm *ASTM D7415 >30 20.2 21.3 21.2 FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 13.8 16.2 16.9 Acid Number (AN) mg KOH/g ASTM D8045 1.38 0.59 1.42	Soot %	%	*ASTM D7844	>3	0	0	0
FLUID DEGRADATION method limit/base current history1 history2 Oxidation Abs/.1mm *ASTM D7414 >25 13.8 16.2 16.9 Acid Number (AN) mg KOH/g ASTM D8045 1.38 0.59 1.42	Nitration	Abs/cm	*ASTM D7624	>20	9.4	10.3	10.7
Oxidation Abs/.1mm *ASTM D7414 >25 13.8 16.2 16.9 Acid Number (AN) mg KOH/g ASTM D8045 1.38 0.59 1.42	Sulfation	Abs/.1mm	*ASTM D7415	>30	20.2	21.3	21.2
Acid Number (AN) mg KOH/g ASTM D8045 1.38 0.59 1.42	FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045 1.38 0.59 1.42	Oxidation	Abs/.1mm	*ASTM D7414	>25	13.8	16.2	16.9
	Acid Number (AN)	mg KOH/g	ASTM D8045			0.59	1.42
, , , , , , , , , , , , , , , , , , , ,	Base Number (BN)	mg KOH/g	ASTM D2896		5.49	4.93	5.40



OIL ANALYSIS REPORT

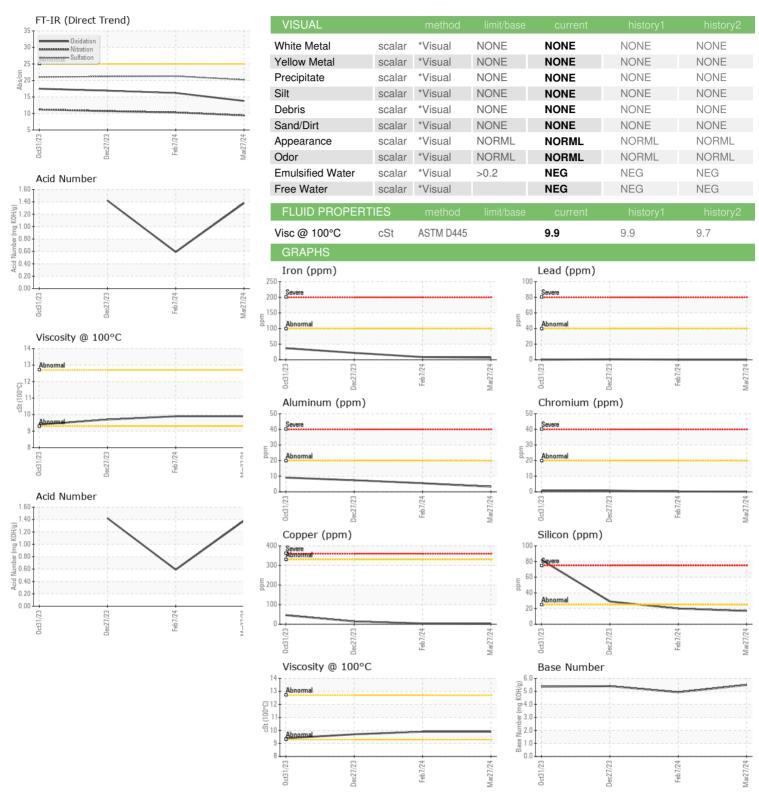





Certificate 12367

Laboratory Sample No. Lab Number : 06149577 Unique Number : 10979655

: WC0871808

Test Package : MOB 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 15 Apr 2024

Tested : 19 Apr 2024 Diagnosed

: 19 Apr 2024 - Jonathan Hester

Contact: SERVICE MANAGER meckmechanic@frontier.com T: (304)456-4541

ALLEGHENY DISPOSAL LLC

To discuss this sample report, contact Customer Service at 1-800-237-1369. st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (304)456-4540 Contact/Location: SERVICE MANAGER - ALLGRELF

PO BOX 4

US 24944

GREEN BANK, WV