




# OIL ANALYSIS REPORT

Sample Rating Trend

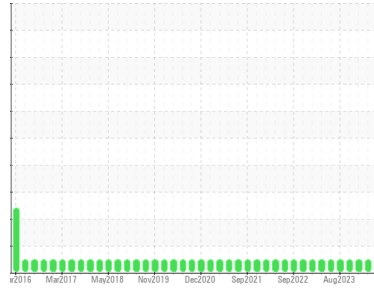

**NORMAL**



Machine Id  
**MACK A-1**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 400 LE 15W40 (14 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0871804</b>	WC0819770	WC0871812
Sample Date	Client Info		<b>26 Mar 2024</b>	31 Jan 2024	06 Dec 2023
Machine Age	hrs	Client Info	<b>27856</b>	27533	27205
Oil Age	hrs	Client Info	<b>323</b>	328	300
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>23</b>	15	25
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>8</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	5	2
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	2
Copper	ppm	ASTM D5185m >330	<b>9</b>	5	8
Tin	ppm	ASTM D5185m >15	<b>2</b>	1	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>184</b>	296	307
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>67</b>	114	116
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>628</b>	631	629
Calcium	ppm	ASTM D5185m	<b>1529</b>	1380	1444
Phosphorus	ppm	ASTM D5185m 1200	<b>705</b>	696	670
Zinc	ppm	ASTM D5185m 1300	<b>785</b>	842	832
Sulfur	ppm	ASTM D5185m 3200	<b>3158</b>	2382	2549

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	6	7
Sodium	ppm	ASTM D5185m	<b>2</b>	2	0
Potassium	ppm	ASTM D5185m >20	<b>1</b>	8	2

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>1.3</b>	0.8	0.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.6</b>	6.2	6.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.3</b>	22.9	23.0


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.1</b>	15.0	15.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.6	<b>9.34</b>	10.22	10.07




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

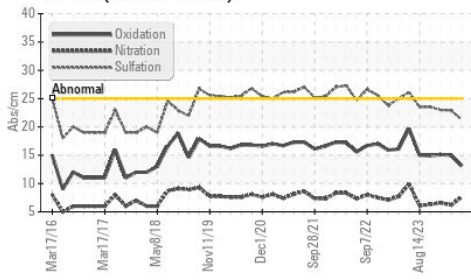

Base Number

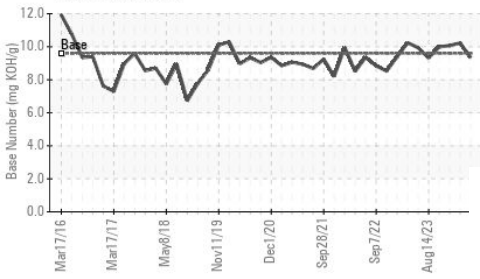









Viscosity @ 100°C

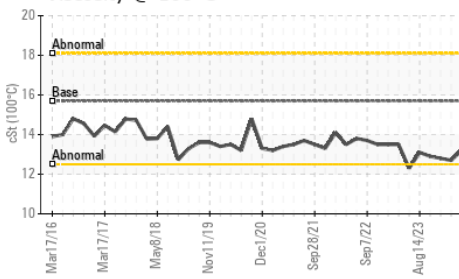

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.7	13.2	12.7	12.8

## GRAPHS

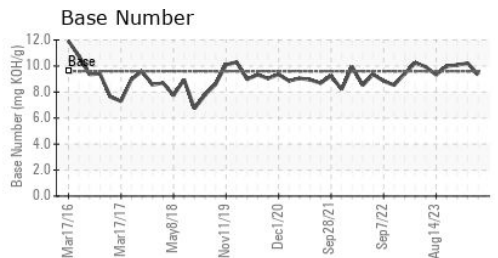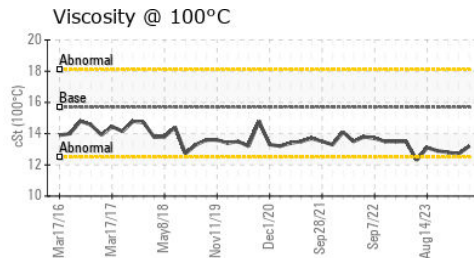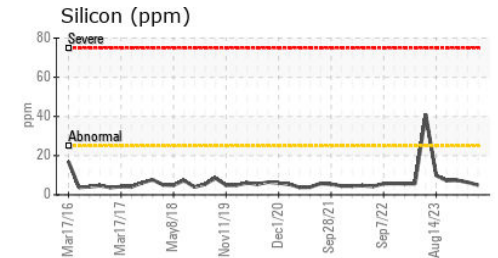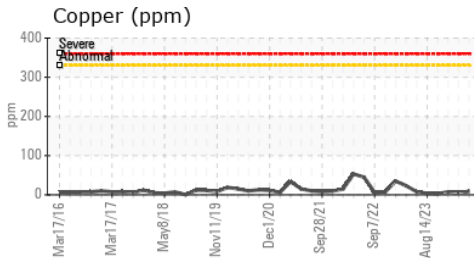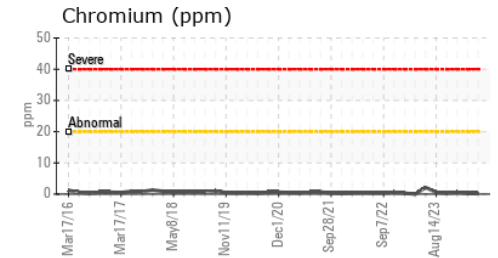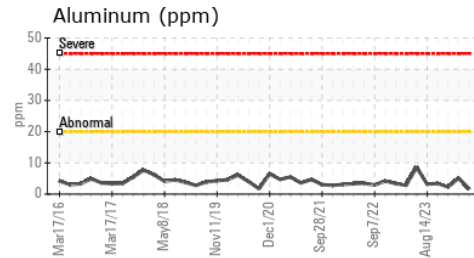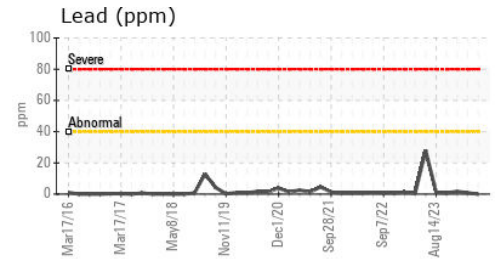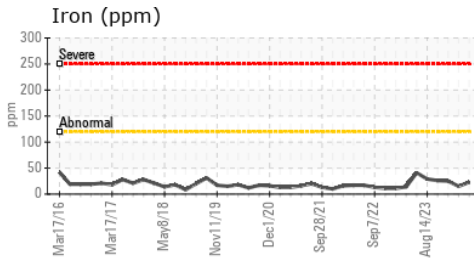

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0871804  
**Lab Number** : 06149585  
**Unique Number** : 10979663  
**Test Package** : MOB 2

**Received** : 15 Apr 2024  
**Tested** : 16 Apr 2024  
**Diagnosed** : 16 Apr 2024 - Wes Davis

**ALLEGHENY DISPOSAL LLC**  
 PO BOX 4  
 GREEN BANK, WV  
 US 24944

Contact: SERVICE MANAGER  
 meckmechanic@frontier.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (304)456-4541

F: (304)456-4540