


OIL ANALYSIS REPORT



Machine Id
CATERPILLAR 980K 6058 (S/N W7K00517)
Component
Diesel Engine
Fluid
TULCO LUBSOIL CK-4 15W40 (--- GAL)

Sample Rating Trend

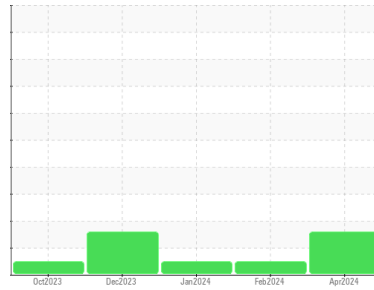

FUEL



DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		TO10003311	TO10003122	TO10003040
Sample Date	Client Info		06 Apr 2024	24 Feb 2024	26 Jan 2024
Machine Age	hrs	Client Info	19983	19683	19449
Oil Age	hrs	Client Info	534	234	559
Oil Changed	Client Info		Changed	Not Changd	Changed
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	15	4	17
Chromium	ppm	ASTM D5185m	>20	<1	<1	2
Nickel	ppm	ASTM D5185m	>2	0	<1	<1
Titanium	ppm	ASTM D5185m	>2	0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	1	3	4
Lead	ppm	ASTM D5185m	>40	0	<1	<1
Copper	ppm	ASTM D5185m	>330	2	<1	2
Tin	ppm	ASTM D5185m	>15	1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		6	8	19
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	65	57	56	54
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	1060	905	886	917
Calcium	ppm	ASTM D5185m	1140	1144	1025	1143
Phosphorus	ppm	ASTM D5185m	1170	1002	1009	1045
Zinc	ppm	ASTM D5185m	1230	1160	1220	1221
Sulfur	ppm	ASTM D5185m	3130	3848	3209	3261

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	5	5	20
Sodium	ppm	ASTM D5185m		13	6	13
Potassium	ppm	ASTM D5185m	>20	<1	2	2
Fuel	%	ASTM D3524	>5	▲ 6.4	<1.0	<1.0






INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	0.7	0.4	0.7
Nitration	Abs/cm	*ASTM D7624	>20	9.5	6.9	9.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.7	19.4	20.4

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.5	14.3	15.4
Base Number (BN)	mg KOH/g	ASTM D2896	10.8	8.71	10.22	9.43









OIL ANALYSIS REPORT

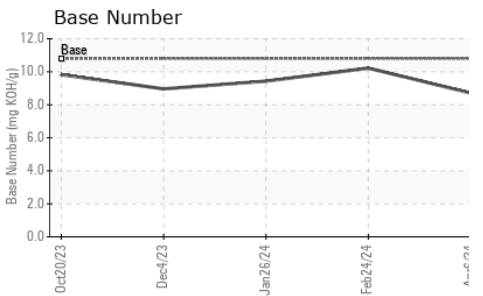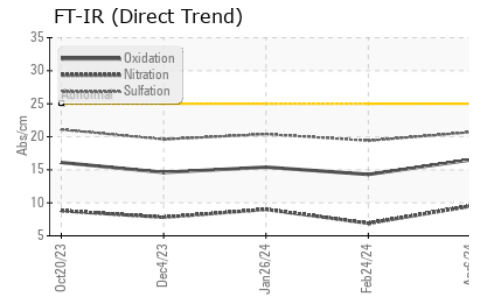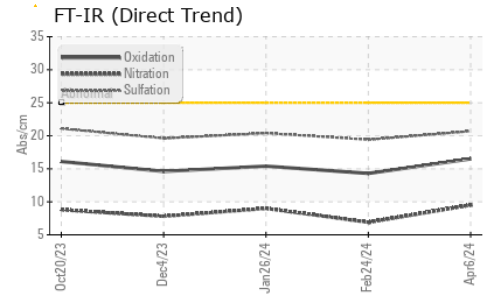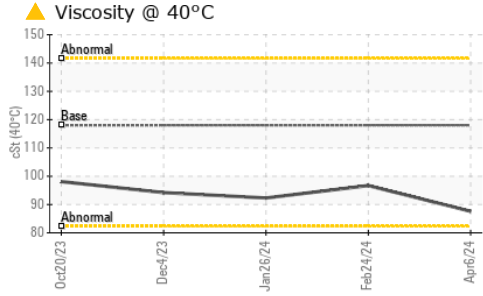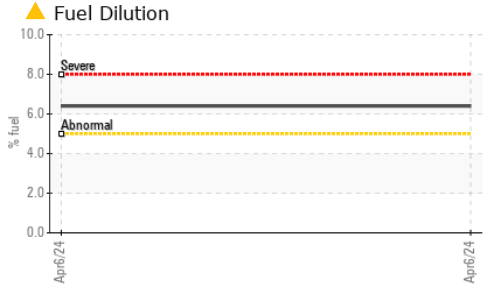

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	118	▲ 87.6	96.7
Visc @ 100°C	cSt	ASTM D445	15.9	▲ 12.2	13.2
Viscosity Index (VI)	Scale	ASTM D2270	143	133	135

GRAPHS

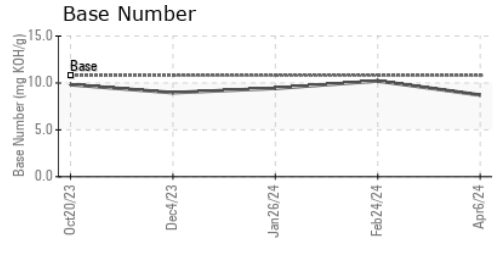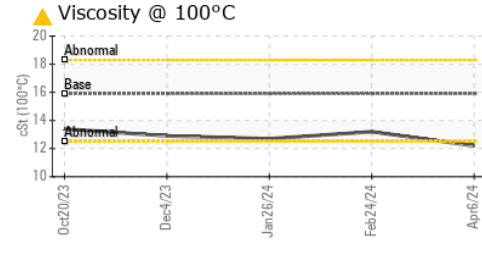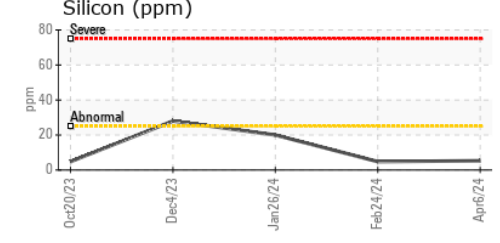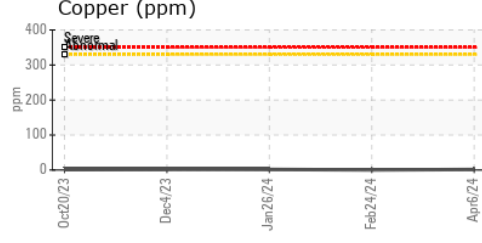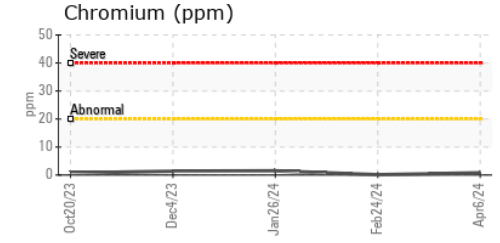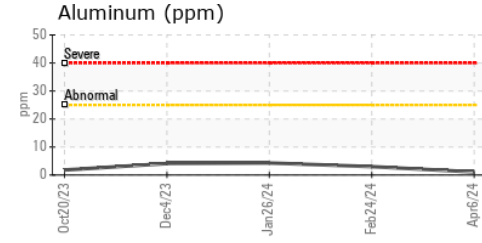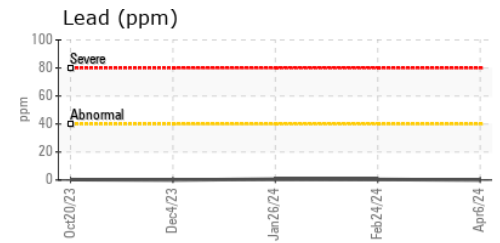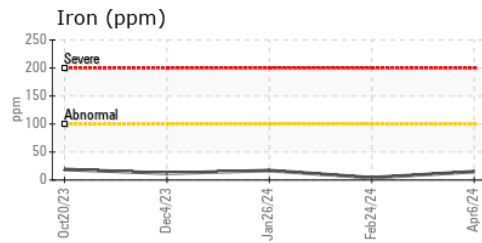

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10003311 **Received** : 15 Apr 2024
Lab Number : 06149593 **Tested** : 19 Apr 2024
Unique Number : 10979671 **Diagnosed** : 19 Apr 2024 - Don Baldrige
Test Package : MOB 2 (Additional Tests: FuelDilution, KV40, PercentFuel, VI)

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137
 Contact: SKIP SAENGERHAUSEN
 skip@anchorstoneco.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)