


# OIL ANALYSIS REPORT

Sample Rating Trend



**WEAR**

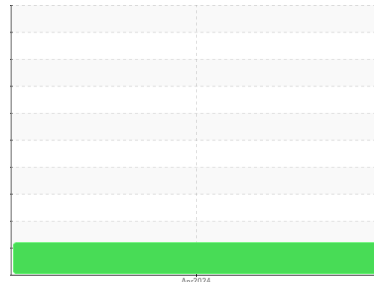

Area  
**[W05004155-3]**  
 Machine Id  
**VOLVO ECR145 311293**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**



## DIAGNOSIS

### ▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### ▲ Wear

The aluminum level is abnormal. All other component wear rates are normal.

### ● Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### ● Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info |             | <b>ML0000449</b>   | ---      | ---      |
| Sample Date   | Client Info |             | <b>08 Apr 2024</b> | ---      | ---      |
| Machine Age   | hrs         | Client Info | <b>2913</b>        | ---      | ---      |
| Oil Age       | hrs         | Client Info | <b>500</b>         | ---      | ---      |
| Oil Changed   | Client Info |             | <b>Changed</b>     | ---      | ---      |
| Sample Status |             |             | <b>ABNORMAL</b>    | ---      | ---      |

## CONTAMINATION

|        | method    | limit/base | current    | history1 | history2 |
|--------|-----------|------------|------------|----------|----------|
| Water  | WC Method | >0.1       | <b>NEG</b> | ---      | ---      |
| Glycol | WC Method |            | <b>NEG</b> | ---      | ---      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >100 | <b>66</b>    | ---      | ---      |
| Chromium | ppm    | ASTM D5185m >10  | <b>2</b>     | ---      | ---      |
| Nickel   | ppm    | ASTM D5185m >10  | <b>&lt;1</b> | ---      | ---      |
| Titanium | ppm    | ASTM D5185m      | <b>&lt;1</b> | ---      | ---      |
| Silver   | ppm    | ASTM D5185m >2   | <b>0</b>     | ---      | ---      |
| Aluminum | ppm    | ASTM D5185m >10  | <b>▲ 20</b>  | ---      | ---      |
| Lead     | ppm    | ASTM D5185m >20  | <b>&lt;1</b> | ---      | ---      |
| Copper   | ppm    | ASTM D5185m >15  | <b>4</b>     | ---      | ---      |
| Tin      | ppm    | ASTM D5185m >10  | <b>&lt;1</b> | ---      | ---      |
| Vanadium | ppm    | ASTM D5185m      | <b>&lt;1</b> | ---      | ---      |
| Cadmium  | ppm    | ASTM D5185m      | <b>&lt;1</b> | ---      | ---      |

## ADDITIVES

|            | method | limit/base       | current     | history1 | history2 |
|------------|--------|------------------|-------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 250  | <b>326</b>  | ---      | ---      |
| Barium     | ppm    | ASTM D5185m 10   | <b>2</b>    | ---      | ---      |
| Molybdenum | ppm    | ASTM D5185m 100  | <b>142</b>  | ---      | ---      |
| Manganese  | ppm    | ASTM D5185m      | <b>1</b>    | ---      | ---      |
| Magnesium  | ppm    | ASTM D5185m 450  | <b>609</b>  | ---      | ---      |
| Calcium    | ppm    | ASTM D5185m 3000 | <b>1453</b> | ---      | ---      |
| Phosphorus | ppm    | ASTM D5185m 1150 | <b>725</b>  | ---      | ---      |
| Zinc       | ppm    | ASTM D5185m 1350 | <b>842</b>  | ---      | ---      |
| Sulfur     | ppm    | ASTM D5185m 4250 | <b>2711</b> | ---      | ---      |

## CONTAMINANTS

|           | method | limit/base       | current      | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >20  | <b>11</b>    | ---      | ---      |
| Sodium    | ppm    | ASTM D5185m >158 | <b>&lt;1</b> | ---      | ---      |
| Potassium | ppm    | ASTM D5185m >20  | <b>2</b>     | ---      | ---      |
| Fuel      | %      | ASTM D3524 >6.0  | <b>2.1</b>   | ---      | ---      |






## INFRA-RED

|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>0.2</b>  | ---      | ---      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>6.8</b>  | ---      | ---      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>20.6</b> | ---      | ---      |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>14.7</b> | ---      | ---      |
| Base Number (BN) | mg KOH/g | ASTM D2896 8.5  | <b>8.2</b>  | ---      | ---      |





# OIL ANALYSIS REPORT

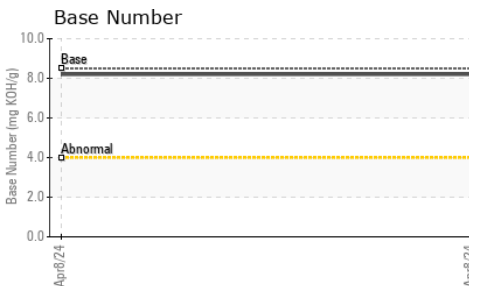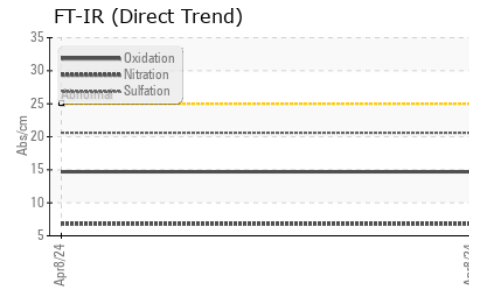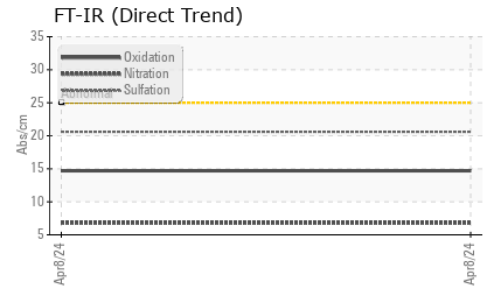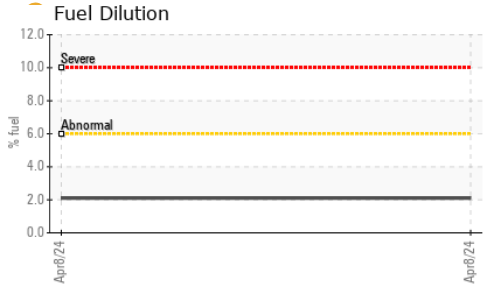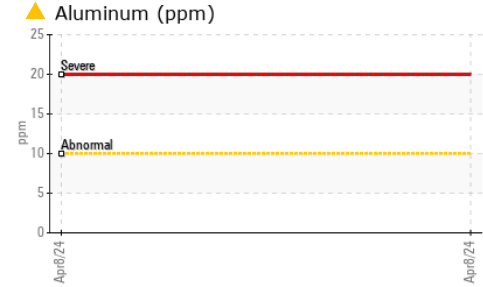

| VISUAL           | method | limit/base | current | history1     | history2 |     |
|------------------|--------|------------|---------|--------------|----------|-----|
| White Metal      | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      | --- |
| Yellow Metal     | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      | --- |
| Precipitate      | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      | --- |
| Silt             | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      | --- |
| Debris           | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      | --- |
| Sand/Dirt        | scalar | *Visual    | NONE    | <b>NONE</b>  | ---      | --- |
| Appearance       | scalar | *Visual    | NORML   | <b>NORML</b> | ---      | --- |
| Odor             | scalar | *Visual    | NORML   | <b>NORML</b> | ---      | --- |
| Emulsified Water | scalar | *Visual    | >0.1    | <b>NEG</b>   | ---      | --- |
| Free Water       | scalar | *Visual    |         | <b>NEG</b>   | ---      | --- |

| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |     |
|------------------|--------|------------|---------|-------------|----------|-----|
| Visc @ 100°C     | cSt    | ASTM D445  | 14.4    | <b>11.6</b> | ---      | --- |

### GRAPHS

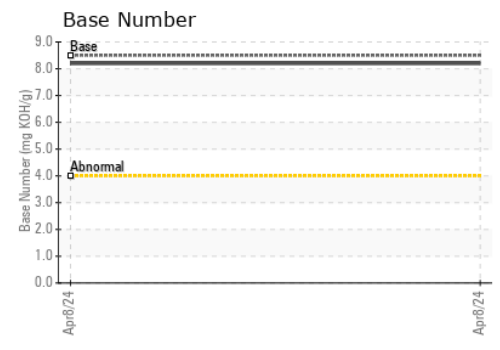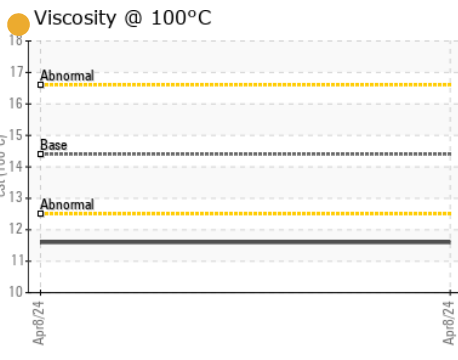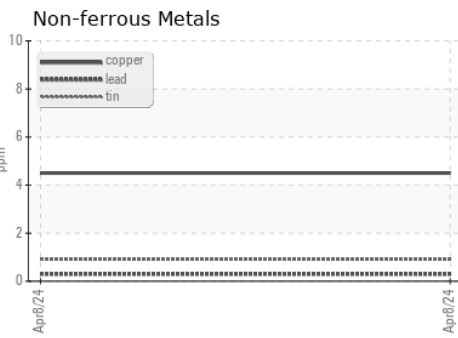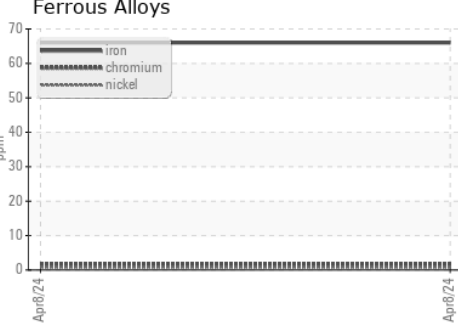

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0000449      **Received** : 16 Apr 2024  
**Lab Number** : **06149845**      **Tested** : 22 Apr 2024  
**Unique Number** : 10979923      **Diagnosed** : 22 Apr 2024 - Jonathan Hester  
**Test Package** : CONST ( Additional Tests : FuelDilution, PercentFuel, TBN )

**MCCLUNG-LOGAN EQUIPMENT CO - WINCHESTER**  
 160 KENTMERE COURT  
 WINCHESTER, VA  
 US 22603  
 Contact: JENNIFER MATIAS  
 jmatias@mcclung-logan.com  
 T: (540)722-3700  
 F: (540)722-4441