



OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY



Machine Id
VOLVO 310125

Component
Tank Hydraulic System

Fluid
VOLVO SUPER HYDRAULIC OIL 46 (--- GAL)

DIAGNOSIS

▲ Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

● Fluid Condition

The oil viscosity is lower than normal. Confirm oil type. The AN level is acceptable for this fluid.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		ML0001448	---	---
Sample Date	Client Info		05 Apr 2024	---	---
Machine Age	hrs	Client Info	2260	---	---
Oil Age	hrs	Client Info	2260	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	---	---

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	5	---	---
Chromium	ppm	ASTM D5185m >10	2	---	---
Nickel	ppm	ASTM D5185m >10	0	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >10	<1	---	---
Lead	ppm	ASTM D5185m >10	0	---	---
Copper	ppm	ASTM D5185m >75	31	---	---
Tin	ppm	ASTM D5185m >10	<1	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---





ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 14	0	---	---
Barium	ppm	ASTM D5185m 0.0	0	---	---
Molybdenum	ppm	ASTM D5185m 0.0	0	---	---
Manganese	ppm	ASTM D5185m 0.0	0	---	---
Magnesium	ppm	ASTM D5185m 2.6	<1	---	---
Calcium	ppm	ASTM D5185m 49	36	---	---
Phosphorus	ppm	ASTM D5185m 354	237	---	---
Zinc	ppm	ASTM D5185m 419	250	---	---
Sulfur	ppm	ASTM D5185m 3719	755	---	---

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	2	---	---
Sodium	ppm	ASTM D5185m	2	---	---
Potassium	ppm	ASTM D5185m >20	0	---	---

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 41154	---	---
Particles >6µm	ASTM D7647	>1300	▲ 3312	---	---
Particles >14µm	ASTM D7647	>160	70	---	---
Particles >21µm	ASTM D7647	>40	13	---	---
Particles >38µm	ASTM D7647	>10	0	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 23/19/13	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.37	---	---

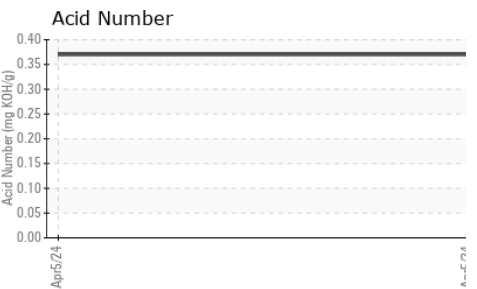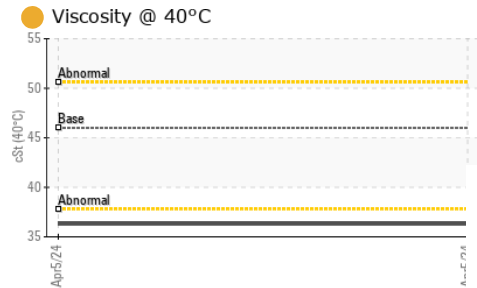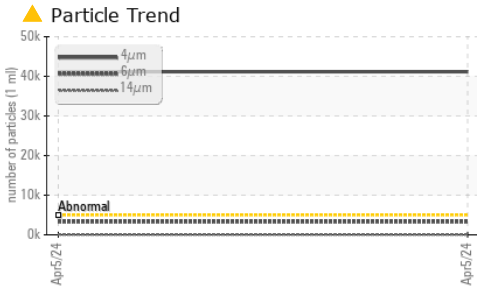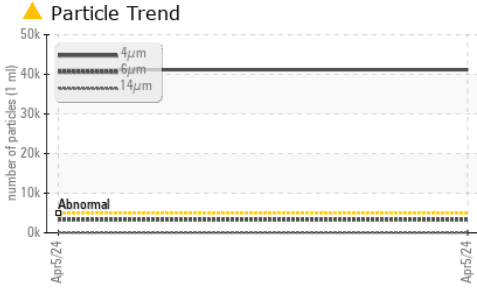

OIL ANALYSIS REPORT








VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	36.3	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

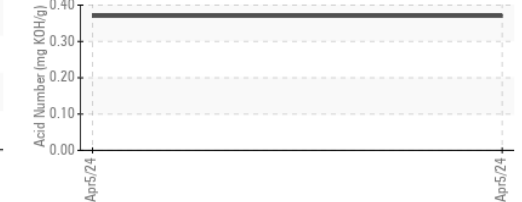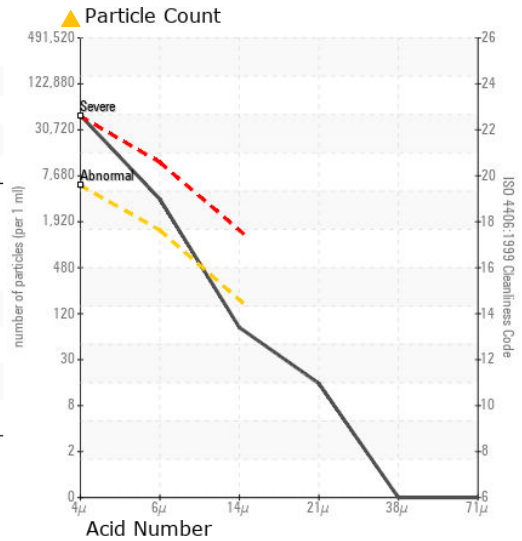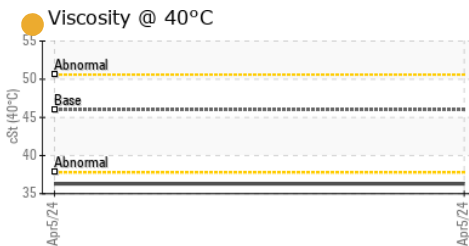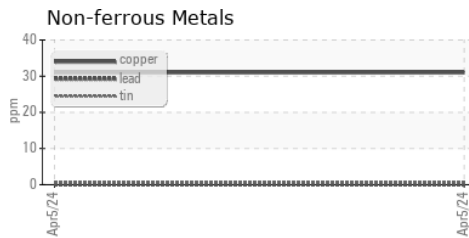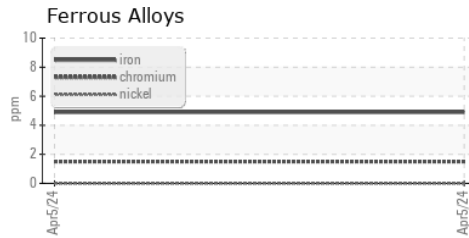

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0001448
Lab Number : 06150228
Unique Number : 10980306
Test Package : CONST

Received : 16 Apr 2024
Tested : 22 Apr 2024
Diagnosed : 22 Apr 2024 - Jonathan Hester

McCLUNG-LOGAN EQUIPMENT CO - RICHMOND
 1345 MOUNTAIN ROAD
 GLEN ALLEN, VA
 US 23060
 Contact: Alex Anderson
 aanderson@mcclung-logan.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (804)266-1611