

OIL ANALYSIS REPORT

Sample Rating Trend





[W02008185] VOLVO A30F 82248 Component Hydraulic System

Fluid {not provided} (50 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. (Customer Sample Comment: W02008185)

Area

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


-)				Apr2U24		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		ML0001600		
Sample Date		Client Info		12 Apr 2024		
Machine Age	hrs	Client Info		14578		
Oil Age	hrs	Client Info		2000		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINATION	J	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	5		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	<1		
Lead	ppm	ASTM D5185m	>20	<1		
Copper	ppm	ASTM D5185m	>150	2		
Tin	ppm	ASTM D5185m	>20	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		99		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		7		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		47		
Calcium	ppm	ASTM D5185m		2820		
Phosphorus	ppm	ASTM D5185m		927		
Zinc	ppm	ASTM D5185m		1029		
Sulfur	ppm	ASTM D5185m		7577		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	13		
Sodium	ppm	ASTM D5185m		9		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		2885		
Particles >6µm		ASTM D7647	>5000	686		
Particles >14µm		ASTM D7647	>160	68		
Particles >21µm		ASTM D7647	>40	20		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>/19/14	19/17/13		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.83		
07.16) Pov: 1				0	ubmitted Dv: DA	


Report Id: VOLVO0002 [WUSCAR] 06150231 (Generated: 04/23/2024 12:07:16) Rev: 1


Submitted By: DARRELL ANDES Page 1 of 2





OIL ANALYSIS REPORT



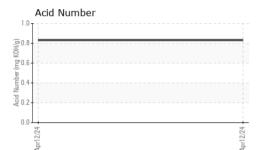





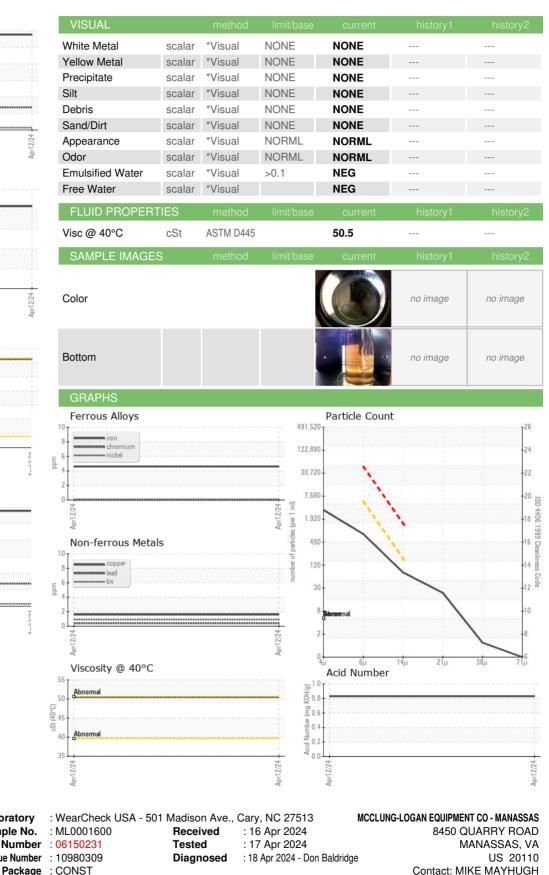

E S

ole report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

MMAYHUGH@MCCLUNG-LOGAN.COM T: (703)393-7344 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (703)393-7844

Laboratory

Sample No.

Submitted By: DARRELL ANDES

Page 2 of 2