




PROBLEM SUMMARY

Machine Id
AZTEC MACHINE
 Component
Hydraulic System
 Fluid
VG-32 (5 GAL)


Sample Rating Trend

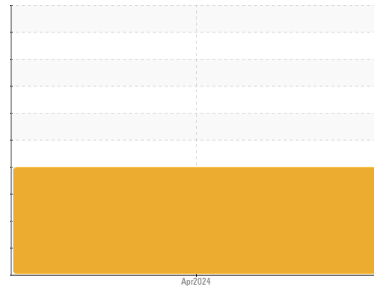

WATER



COMPONENT CONDITION SUMMARY

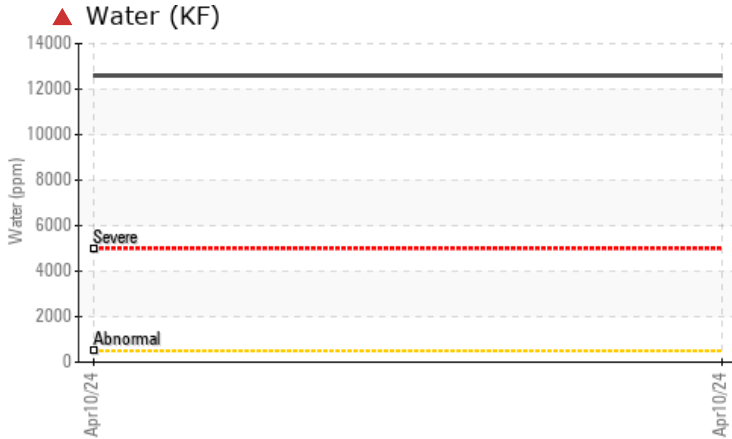

RECOMMENDATION

We advise that you check for the source of water entry. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	---	---
Water	%	ASTM D6304	>0.05	▲ 1.26	---	---
ppm Water	ppm	ASTM D6304	>500	▲ 12600	---	---
Emulsified Water	scalar	*Visual	>0.05	▲ 0.2%	---	---
PrtFilter					no image	no image

Customer Id: METWIX
 Sample No.: PH0003468
 Lab Number: 06150311
 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS


Action	Status	Date	Done By	Description
Change Filter	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Water Access	---	---	?	We advise that you check for the source of water entry.
Filter Fluid	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

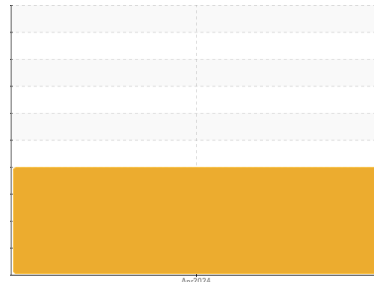

WATER



Machine Id
AZTEC MACHINE
 Component
Hydraulic System
 Fluid
VG-32 (5 GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check for the source of water entry. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

Appearance is unacceptable There is a high concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PH0003468	---	---
Sample Date	Client Info		10 Apr 2024	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			SEVERE	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	0	---	---
Chromium	ppm	ASTM D5185m >20	0	---	---
Nickel	ppm	ASTM D5185m >20	0	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >20	0	---	---
Lead	ppm	ASTM D5185m >20	0	---	---
Copper	ppm	ASTM D5185m >20	2	---	---
Tin	ppm	ASTM D5185m >20	2	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	<1	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	8	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	0	---	---
Manganese	ppm	ASTM D5185m	0	---	---
Magnesium	ppm	ASTM D5185m	48	---	---
Calcium	ppm	ASTM D5185m	51	---	---
Phosphorus	ppm	ASTM D5185m	248	---	---
Zinc	ppm	ASTM D5185m	268	---	---
Sulfur	ppm	ASTM D5185m	1303	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<1	---	---
Sodium	ppm	ASTM D5185m	2	---	---
Potassium	ppm	ASTM D5185m >20	<1	---	---
Water	%	ASTM D6304 >0.05	▲ 1.26	---	---
ppm Water	ppm	ASTM D6304 >500	▲ 12600	---	---

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	2131	---	---
Particles >6µm	ASTM D7647	>2500	1161	---	---
Particles >14µm	ASTM D7647	>320	198	---	---
Particles >21µm	ASTM D7647	>80	67	---	---
Particles >38µm	ASTM D7647	>20	10	---	---
Particles >71µm	ASTM D7647	>4	1	---	---
Oil Cleanliness	ISO 4406 (c)	>20/18/15	18/17/15	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.74	---	---



OIL ANALYSIS REPORT

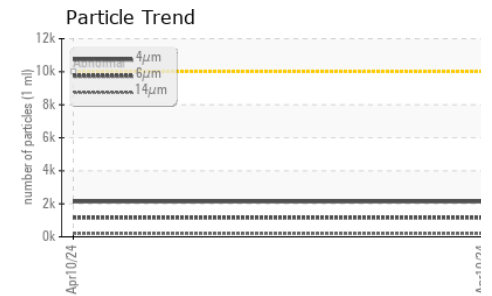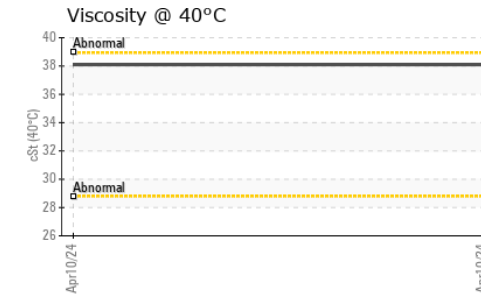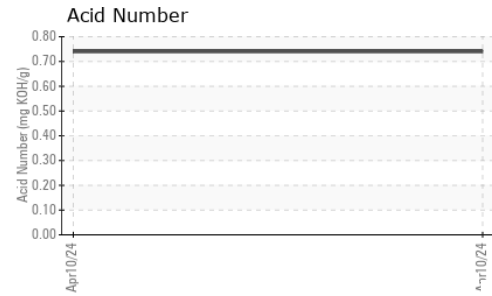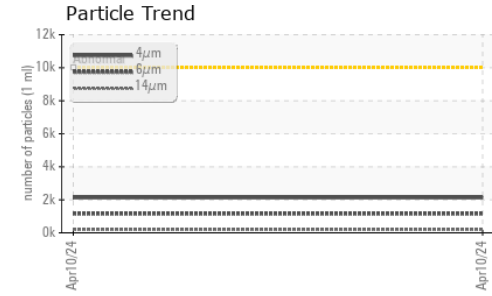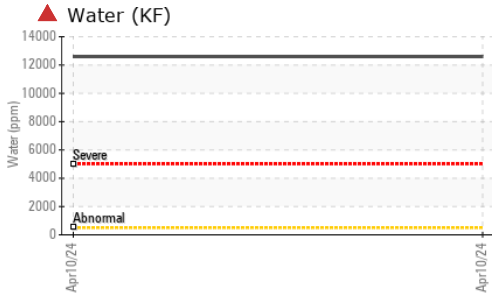






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	● MILKY	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	▲ 0.2%	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	38.1	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image
PrtFilter				no image	no image

GRAPHS

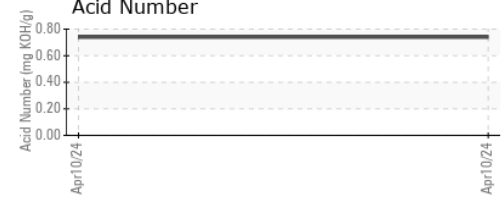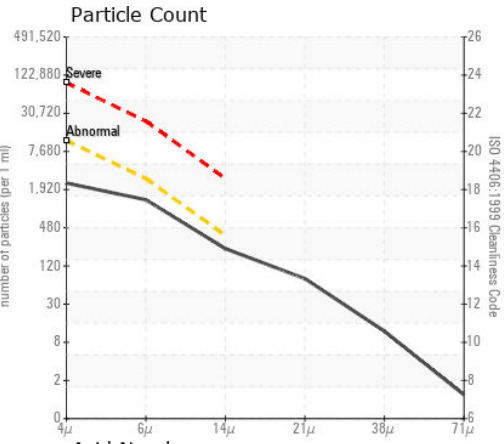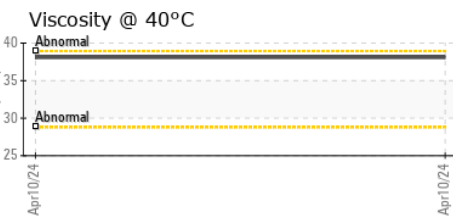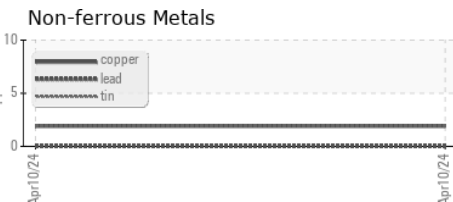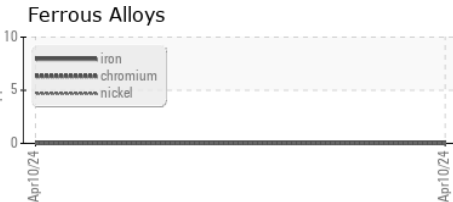

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PH0003468 **Received** : 16 Apr 2024
Lab Number : 06150311 **Tested** : 22 Apr 2024
Unique Number : 10980389 **Diagnosed** : 22 Apr 2024 - Jonathan Hester
Test Package : PLANT (Additional Tests: KF)

METHODS MACHINE TOOLS INC
 50531 VARSITY CT
 WIXOM, MI 48393
 Contact: TIM ORLOSKI
 torloski@methodsmachine.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)