




OIL ANALYSIS REPORT

Sample Rating Trend

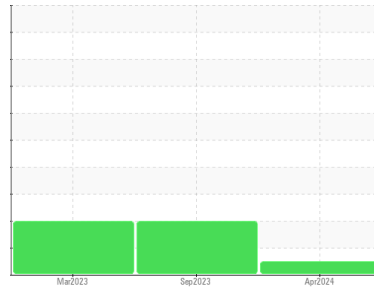

NORMAL



Machine Id
KAESER AS20 8500088 (S/N 1406)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KC120568	KC124291	KC104083
Sample Date	Client Info			03 Apr 2024	26 Sep 2023	03 Mar 2023
Machine Age	hrs	Client Info		5212	3819	2307
Oil Age	hrs	Client Info		0	0	2307
Oil Changed	Client Info			N/A	N/A	Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	<1
Lead	ppm	ASTM D5185m	>10	0	1	0
Copper	ppm	ASTM D5185m	>50	2	2	2
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	8	44	16
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	90	62	82	88
Calcium	ppm	ASTM D5185m	2	13	22	3
Phosphorus	ppm	ASTM D5185m		1	<1	5
Zinc	ppm	ASTM D5185m		0	<1	6

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	1	1
Sodium	ppm	ASTM D5185m		24	8	19
Potassium	ppm	ASTM D5185m	>20	9	5	16
Water	%	ASTM D6304	>0.05	0.016	0.029	0.009
ppm Water	ppm	ASTM D6304	>500	170	296.8	98.8

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		2463	33604	56387
Particles >6µm		ASTM D7647	>1300	650	▲ 13823	▲ 27025
Particles >14µm		ASTM D7647	>80	41	▲ 1426	▲ 1740
Particles >21µm		ASTM D7647	>20	10	▲ 366	▲ 248
Particles >38µm		ASTM D7647	>4	0	▲ 14	▲ 11
Particles >71µm		ASTM D7647	>3	0	1	1
Oil Cleanliness		ISO 4406 (c)	>--/17/13	18/17/13	▲ 22/21/18	▲ 23/22/18

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.38	0.35	0.33


OIL ANALYSIS REPORT

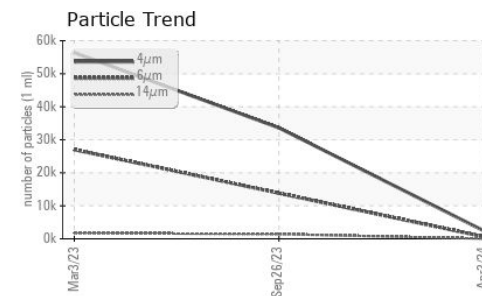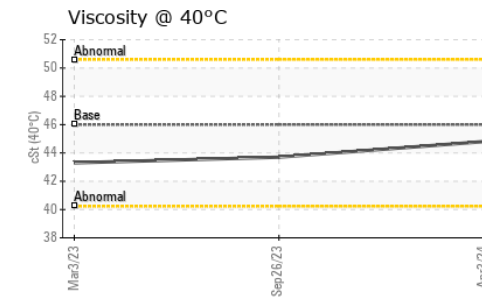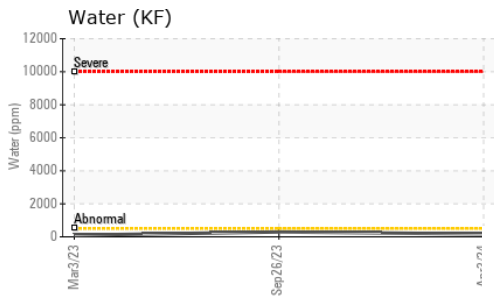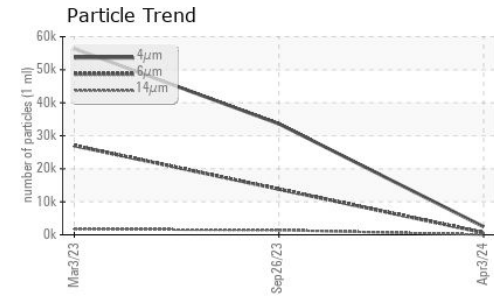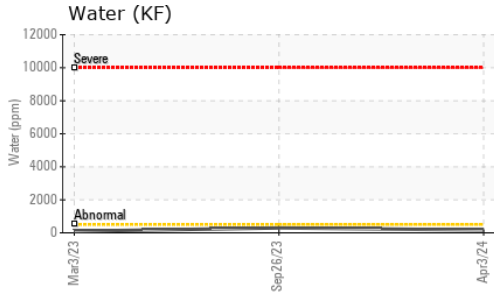




VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	44.8	43.7	43.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

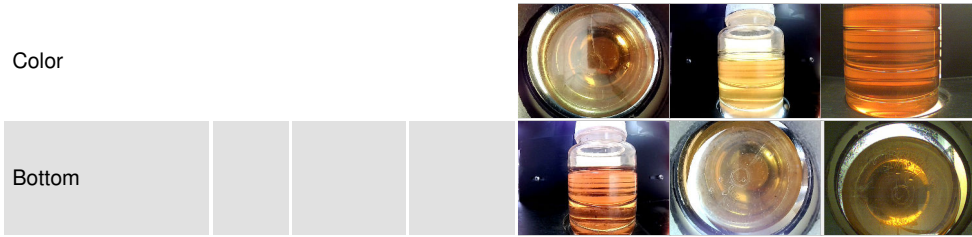

GRAPHS

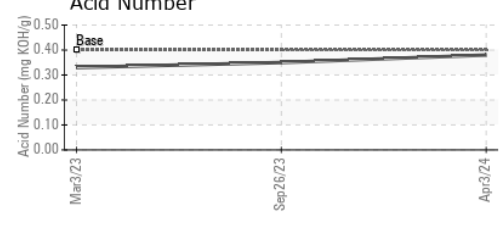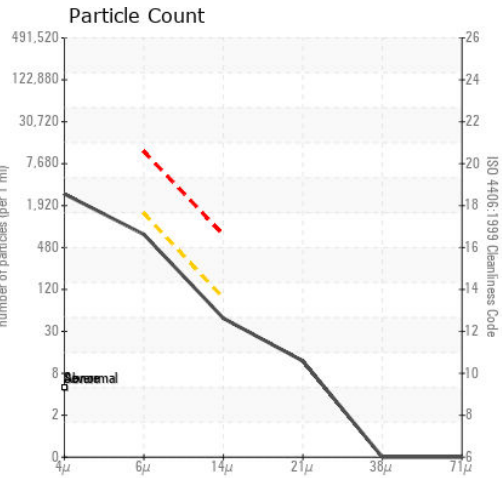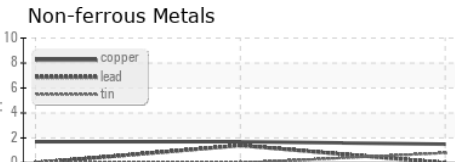

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC120568
Lab Number : 06150339
Unique Number : 10980417
Test Package : IND 2
Received : 16 Apr 2024
Tested : 17 Apr 2024
Diagnosed : 18 Apr 2024 - Don Baldrige

KISTLER O'BRIEN FIVE PROTECTION
 2210 CITY LINE RD
 BETHLEHEM, PA
 US 18017
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)