




# OIL ANALYSIS REPORT

Sample Rating Trend

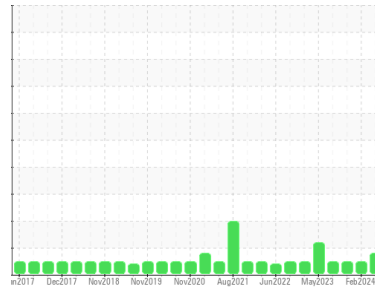

ISO



Machine Id  
**BUSCH VM8 / VP-2**  
 Component  
**Pump**  
 Fluid  
**USPI VAC 100 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 6 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>USP0006792</b>  | USPM30251   | USPM31376   |
| Sample Date   | Client Info |             | <b>15 Apr 2024</b> | 28 Feb 2024 | 26 Nov 2023 |
| Machine Age   | hrs         | Client Info | <b>0</b>           | 0           | 0           |
| Oil Age       | hrs         | Client Info | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info |             | <b>N/A</b>         | N/A         | N/A         |
| Sample Status |             |             | <b>ATTENTION</b>   | NORMAL      | NORMAL      |

## WEAR METALS

|          | method | limit/base      | current      | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >90 | <b>2</b>     | 0        | 0        |
| Chromium | ppm    | ASTM D5185m >5  | <b>&lt;1</b> | 0        | 0        |
| Nickel   | ppm    | ASTM D5185m >5  | <b>0</b>     | 0        | <1       |
| Titanium | ppm    | ASTM D5185m >3  | <b>0</b>     | 0        | 0        |
| Silver   | ppm    | ASTM D5185m >3  | <b>0</b>     | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >7  | <b>&lt;1</b> | 1        | 3        |
| Lead     | ppm    | ASTM D5185m >12 | <b>0</b>     | 0        | 0        |
| Copper   | ppm    | ASTM D5185m >30 | <b>0</b>     | 0        | 0        |
| Tin      | ppm    | ASTM D5185m >9  | <b>&lt;1</b> | <1       | 1        |
| Vanadium | ppm    | ASTM D5185m     | <b>0</b>     | 0        | 0        |
| Cadmium  | ppm    | ASTM D5185m     | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | 0        | 0        |
| Barium     | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | <1       | 0        |
| Molybdenum | ppm    | ASTM D5185m 0    | <b>0</b>     | 0        | 0        |
| Manganese  | ppm    | ASTM D5185m      | <b>&lt;1</b> | 0        | 0        |
| Magnesium  | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | 0        | 1        |
| Calcium    | ppm    | ASTM D5185m 0    | <b>4</b>     | 2        | 3        |
| Phosphorus | ppm    | ASTM D5185m 1800 | <b>1913</b>  | 822      | 921      |
| Zinc       | ppm    | ASTM D5185m 0    | <b>0</b>     | 0        | 0        |
| Sulfur     | ppm    | ASTM D5185m 0    | <b>0</b>     | 19       | 9        |

## CONTAMINANTS

|           | method | limit/base       | current      | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >60  | <b>&lt;1</b> | 2        | 2        |
| Sodium    | ppm    | ASTM D5185m      | <b>&lt;1</b> | 1        | 1        |
| Potassium | ppm    | ASTM D5185m >20  | <b>2</b>     | 0        | 2        |
| Water     | %      | ASTM D6304 >.1   | <b>0.033</b> | 0.027    | 0.043    |
| ppm Water | ppm    | ASTM D6304 >1000 | <b>331</b>   | 279      | 433      |

## FLUID CLEANLINESS

|                 | method       | limit/base | current         | history1 | history2 |
|-----------------|--------------|------------|-----------------|----------|----------|
| Particles >4µm  | ASTM D7647   | >5000      | <b>5938</b>     | 827      | 1763     |
| Particles >6µm  | ASTM D7647   | >1300      | <b>1266</b>     | 326      | 553      |
| Particles >14µm | ASTM D7647   | >160       | <b>49</b>       | 30       | 51       |
| Particles >21µm | ASTM D7647   | >40        | <b>9</b>        | 7        | 14       |
| Particles >38µm | ASTM D7647   | >10        | <b>0</b>        | 0        | 3        |
| Particles >71µm | ASTM D7647   | >3         | <b>0</b>        | 0        | 1        |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14  | <b>20/17/13</b> | 17/16/12 | 18/16/13 |


## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 0.05 | <b>0.36</b> | 0.20     | 0.29     |




# OIL ANALYSIS REPORT


## Particle Trend

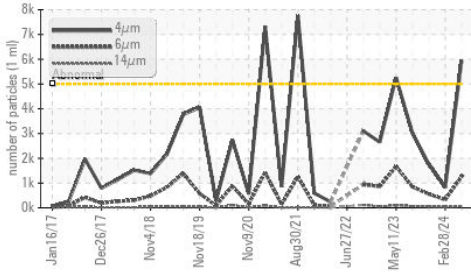


## Water (KF)

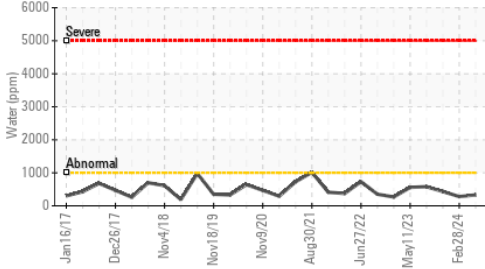


## Acid Number

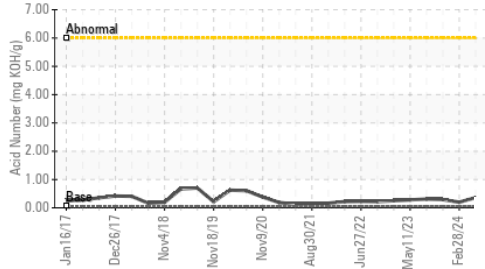

## Water (KF)

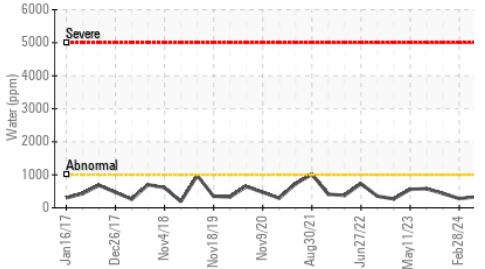


## Viscosity @ 40°C

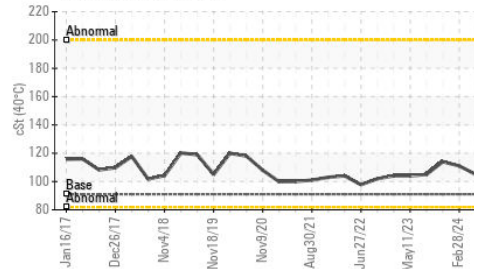

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | LIGHT    |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >.1     | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |


| FLUID PROPERTIES | method | limit/base   | current | history1 | history2 |
|------------------|--------|--------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445 91 | 105     | 111      | 114      |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

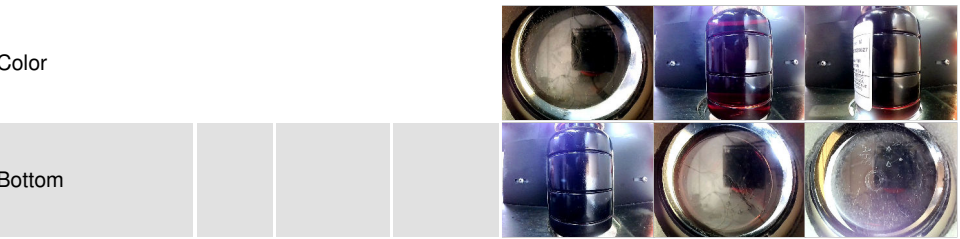


## GRAPHS


### Ferrous Alloys

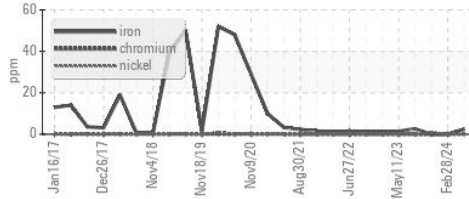


### Non-ferrous Metals

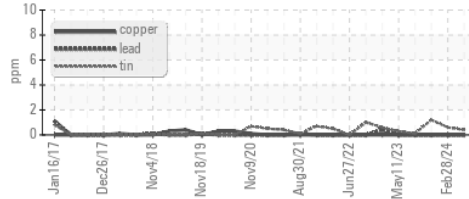


### Viscosity @ 40°C

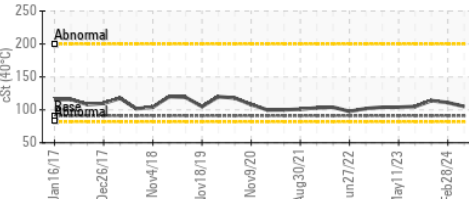

### Particle Count

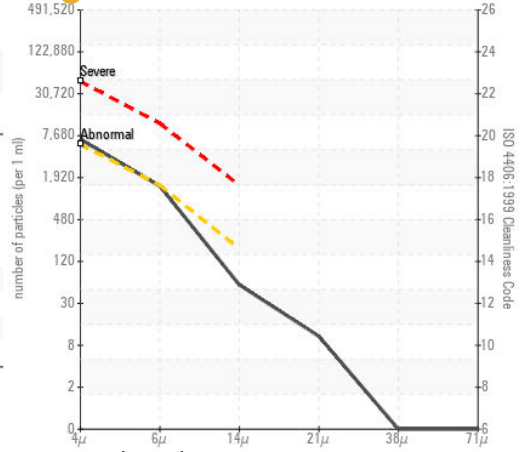

### Acid Number

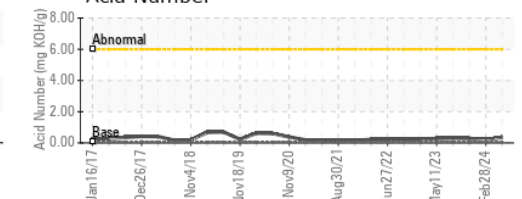

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : USP006792

Lab Number : 06150395

Unique Number : 10980473

Test Package : IND 2

Received : 16 Apr 2024

Tested : 17 Apr 2024

Diagnosed : 17 Apr 2024 - Doug Bogart

TYSON-DAKOTA CITY-PRO

P.O. BOX 515

DAKOTA CITY, NE

US 68731

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (605)235-2960