


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id
API633158

Component Compressor

ATLAS COPCO ROTO XTEND (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

	Ove2021 Ove2023 Apr2024					
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0006338	USP0003422	USP05419086
Sample Date		Client Info		07 Apr 2024	29 Oct 2023	01 Dec 2021
Machine Age	hrs	Client Info		21310	0	2998
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	Not Changd
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	5	3	0
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m		1	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>15	0	0	0
Lead	ppm	ASTM D5185m	>65	<1	<1	0
Copper	ppm	ASTM D5185m	>65	24	14	0
Tin	ppm	ASTM D5185m	>10	<1	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		1	<1	0
Magnesium	ppm	ASTM D5185m		0	<1	0
Calcium	ppm	ASTM D5185m		<1	<1	0
Phosphorus	ppm	ASTM D5185m		17	11	56
Zinc	ppm	ASTM D5185m		130	102	11
Sulfur	ppm	ASTM D5185m		175	108	104
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>35	3	<1	0
Sodium	ppm	ASTM D5185m		6	2	0
Potassium	ppm	ASTM D5185m	>20	4	<1	0
Water	%	ASTM D6304	>0.1	0.007	0.003	0.002
ppm Water	ppm	ASTM D6304	>1000	78	31.2	18.6
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	5981	<u>\$\infty\$ 92544</u>	
Particles >6µm		ASTM D7647	>2500	1436	<u>\$\text{23608}\$</u>	
Particles >14µm		ASTM D7647	>320	143	<u>405</u>	
Particles >21µm		ASTM D7647	>80	39	59	
Particles >38μm		ASTM D7647	>20	2	1	
Particles >71μm		ASTM D7647	>4	0	0	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	20/18/14	<u>4</u> 24/22/16	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2



OIL ANALYSIS REPORT

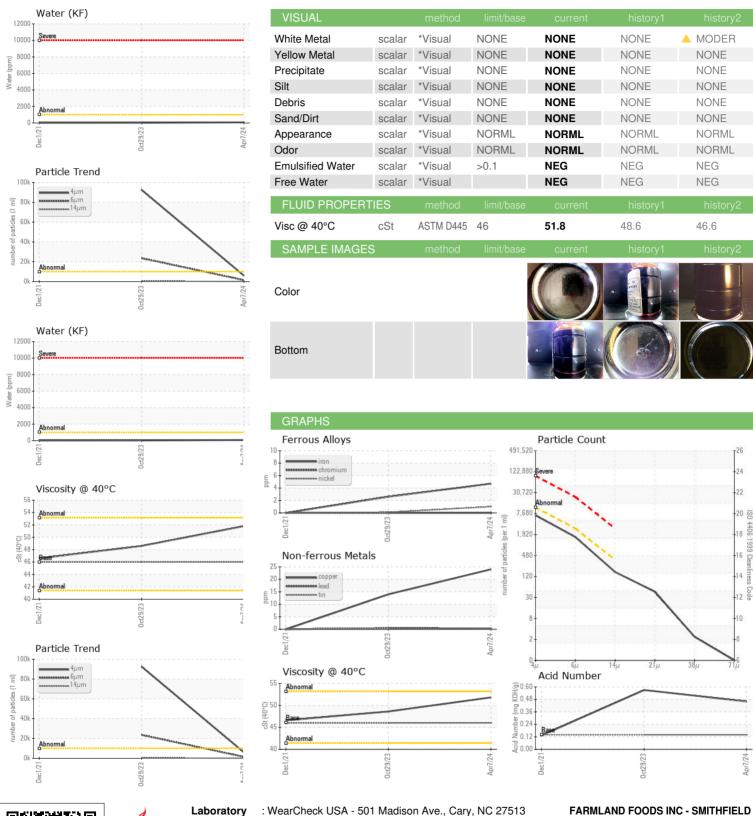





Certificate 12367

Laboratory Sample No.

Test Package : IND 2

: USP0006338 Lab Number : 06150455

Unique Number : 10980533

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 16 Apr 2024

Tested : 18 Apr 2024 Diagnosed

: 18 Apr 2024 - Doug Bogart

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) MONMOUTH, IL

US

T:

F:

Contact: