




OIL ANALYSIS REPORT

Sample Rating Trend

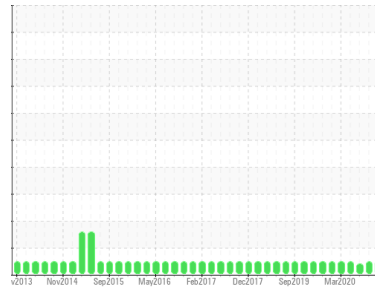

NORMAL



Area

JOHN M DONNELLY

Machine Id

[JOHN M DONNELLY] 008 621298-8

Component

Starboard Genset

Fluid

CHEVRON DELO 400 MULTIGRADE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		MW0061222	MW0017912	MW0033962
Sample Date	Client Info		27 Mar 2024	22 Aug 2023	09 Jan 2023
Machine Age	hrs	Client Info	5612	0	0
Oil Age	hrs	Client Info	462	489	400
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	ATTENTION

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	1.9
Water	WC Method	>0.1	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>50	7	10	6
Chromium	ppm	ASTM D5185m	>4	<1	<1	1
Nickel	ppm	ASTM D5185m	>2	0	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>12	3	4	2
Lead	ppm	ASTM D5185m	>17	<1	0	<1
Copper	ppm	ASTM D5185m	>70	1	2	11
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Antimony	ppm	ASTM D5185m		---	---	---
Vanadium	ppm	ASTM D5185m		<1	<1	1
Cadmium	ppm	ASTM D5185m		0	<1	<1

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	151	341	286	299
Barium	ppm	ASTM D5185m	0.4	0	10	0
Molybdenum	ppm	ASTM D5185m	250	119	125	112
Manganese	ppm	ASTM D5185m		2	<1	2
Magnesium	ppm	ASTM D5185m	0	637	611	586
Calcium	ppm	ASTM D5185m	2046	1586	1464	1306
Phosphorus	ppm	ASTM D5185m	1043	680	653	571
Zinc	ppm	ASTM D5185m	943	790	776	703
Sulfur	ppm	ASTM D5185m	5012	2833	2638	2326

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	5	7	7
Sodium	ppm	ASTM D5185m		5	0	3
Potassium	ppm	ASTM D5185m	>20	18	2	1

INFRA-RED




	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844		0.1	0.2	0.1
Nitration	Abs/cm	*ASTM D7624	>20	7.1	7.1	6.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.7	23.0	20.8

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.8	16.5	15.8
Base Number (BN)	mg KOH/g	ASTM D2896	12.5	9.2	9.6	8.2







OIL ANALYSIS REPORT

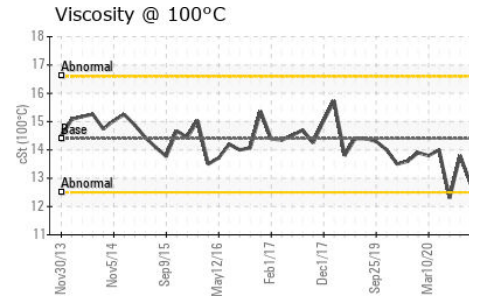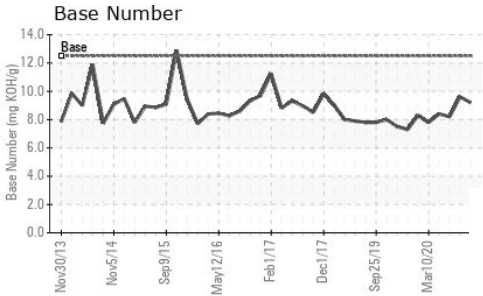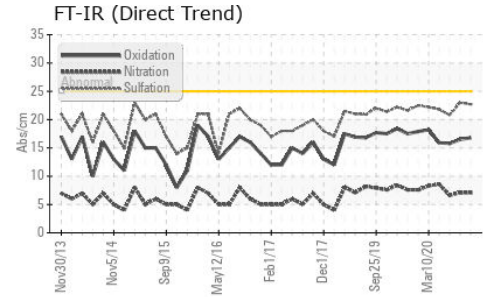

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	12.8	13.8

GRAPHS

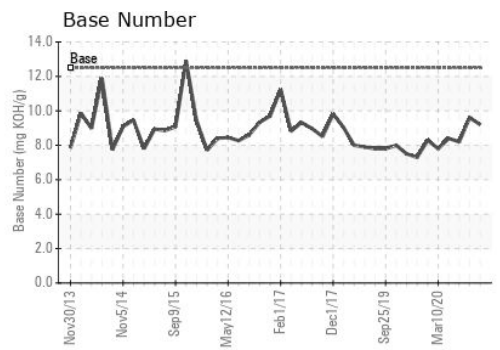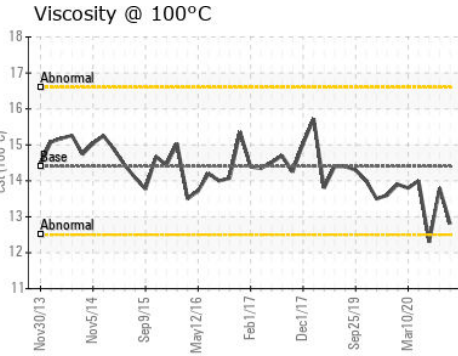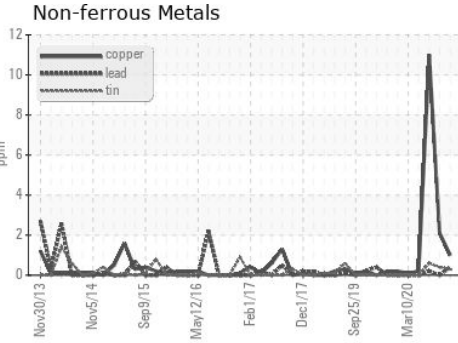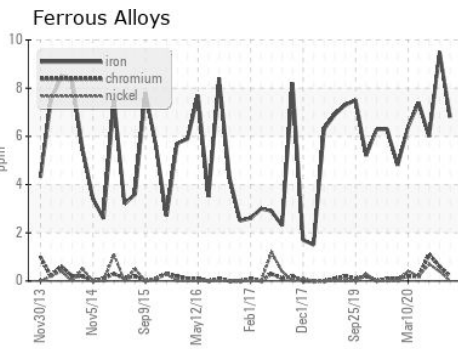

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0061222 **Received** : 16 Apr 2024
Lab Number : 06150924 **Tested** : 17 Apr 2024
Unique Number : 10981002 **Diagnosed** : 17 Apr 2024 - Wes Davis
Test Package : MAR 2

INGRAM BARGE
 900 S 3RD ST
 PADUCAH, KY
 US 42003
 Contact: ALLEN WILLHELM
 allen.willhelm@ingrambarge.com
 T: (270)415-4467
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)