




OIL ANALYSIS REPORT

Sample Rating Trend

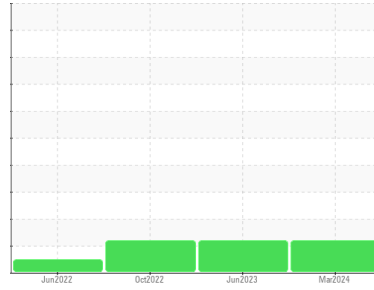

ISO



Area
PLOGER
 Machine Id
821 - PLOGER
 Component
Front Differential
 Fluid
 {not provided} (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0900796	WC0828786	WC0765898
Sample Date	Client Info		30 Mar 2024	27 Jun 2023	08 Oct 2022
Machine Age	mls	Client Info	339113	253081	168485
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	412	368	288
Chromium	ppm	ASTM D5185m >10	4	3	2
Nickel	ppm	ASTM D5185m >10	5	4	5
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m	0	<1	0
Aluminum	ppm	ASTM D5185m >25	3	<1	2
Lead	ppm	ASTM D5185m >25	12	9	0
Copper	ppm	ASTM D5185m >100	63	67	2
Tin	ppm	ASTM D5185m >10	8	7	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	74	75	85
Barium	ppm	ASTM D5185m	2	5	0
Molybdenum	ppm	ASTM D5185m	0	<1	<1
Manganese	ppm	ASTM D5185m	15	13	8
Magnesium	ppm	ASTM D5185m	162	152	152
Calcium	ppm	ASTM D5185m	15	7	8
Phosphorus	ppm	ASTM D5185m	1665	1527	1514
Zinc	ppm	ASTM D5185m	7	11	8
Sulfur	ppm	ASTM D5185m	29375	26003	27717

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	60	43	24
Sodium	ppm	ASTM D5185m	7	0	3
Potassium	ppm	ASTM D5185m >20	3	1	1
Water	%	ASTM D6304 >.2	0.036	0.050	0.038
ppm Water	ppm	ASTM D6304 >2000	368	503.0	382.6

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 75981	▲ 64264	▲ 176491
Particles >6µm	ASTM D7647	>5000	● 7376	● 6943	▲ 50340
Particles >14µm	ASTM D7647	>640	125	126	200
Particles >21µm	ASTM D7647	>160	24	19	13
Particles >38µm	ASTM D7647	>40	1	2	0
Particles >71µm	ASTM D7647	>10	0	2	0
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 23/20/14	▲ 23/20/14	▲ 25/23/15

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.00	0.94	0.85




OIL ANALYSIS REPORT

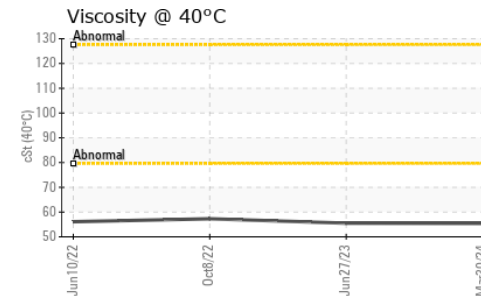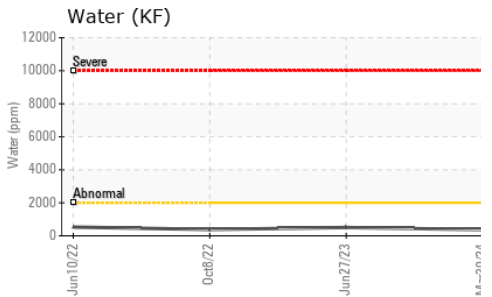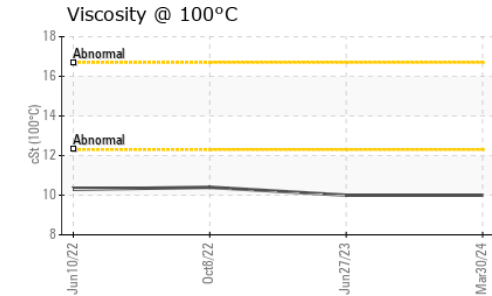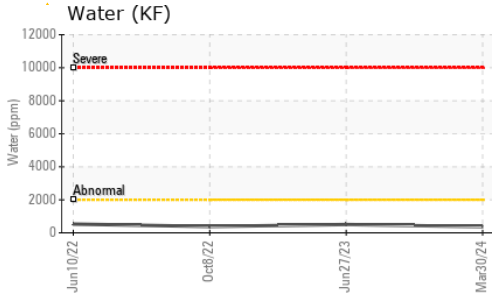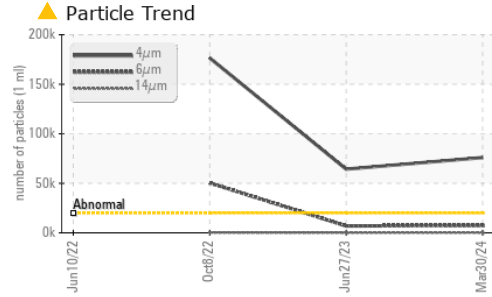






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	LIGHT
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	55.4	55.5	57.3
Visc @ 100°C	cSt	ASTM D445	10.0	10.0	10.4
Viscosity Index (VI)	Scale	ASTM D2270	169	168	172

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

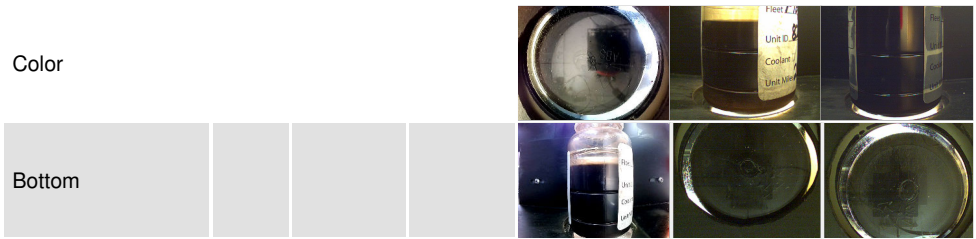

GRAPHS

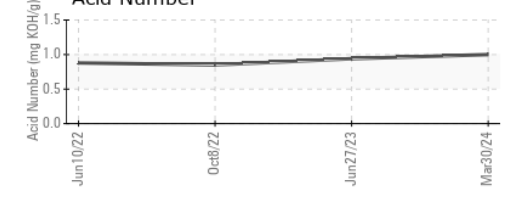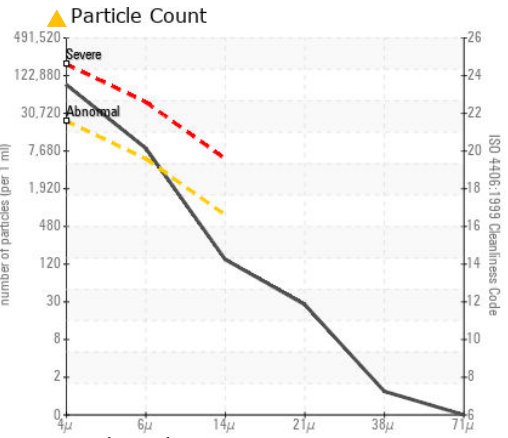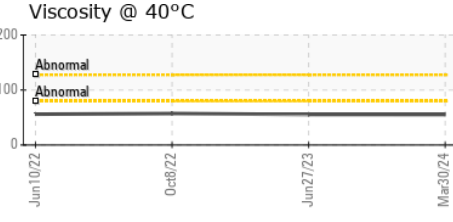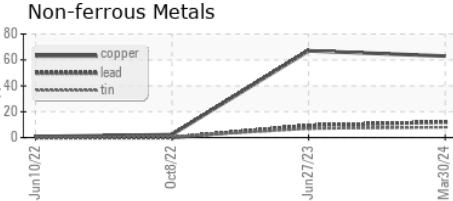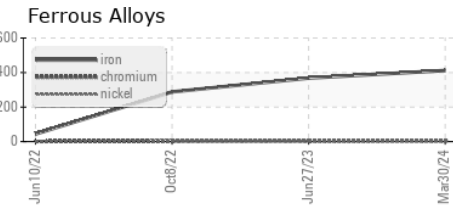

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0900796 **Received** : 16 Apr 2024
Lab Number : 06151063 **Tested** : 18 Apr 2024
Unique Number : 10981141 **Diagnosed** : 19 Apr 2024 - Don Baldrige
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)