




OIL ANALYSIS REPORT

Sample Rating Trend

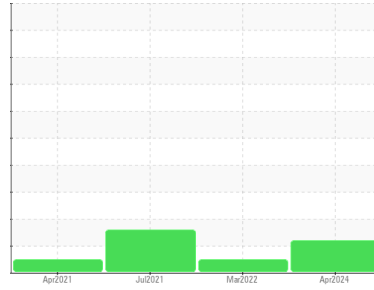

ISO



Area
PLOGER
 Machine Id
5196 - PLOGER
 Component
Front Differential
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0900794	WC0692912	WC0604662
Sample Date	Client Info		04 Apr 2024	22 Mar 2022	21 Jul 2021
Machine Age	mls	Client Info	610276	393788	300724
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	NORMAL	MARGINAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	358	431	361
Chromium	ppm	ASTM D5185m >10	3	5	4
Nickel	ppm	ASTM D5185m >10	3	4	5
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m	0	<1	0
Aluminum	ppm	ASTM D5185m >25	4	4	3
Lead	ppm	ASTM D5185m >25	7	6	4
Copper	ppm	ASTM D5185m >100	53	38	26
Tin	ppm	ASTM D5185m >10	5	3	2
Antimony	ppm	ASTM D5185m >5	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	61	75	88
Barium	ppm	ASTM D5185m	3	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	<1
Manganese	ppm	ASTM D5185m	10	15	13
Magnesium	ppm	ASTM D5185m	193	185	161
Calcium	ppm	ASTM D5185m	22	18	13
Phosphorus	ppm	ASTM D5185m	1877	1724	1531
Zinc	ppm	ASTM D5185m	17	15	15
Sulfur	ppm	ASTM D5185m	29568	21148	20092

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	61	38	32
Sodium	ppm	ASTM D5185m	17	10	10
Potassium	ppm	ASTM D5185m >20	4	1	<1
Water	%	ASTM D6304 >.2	0.037	0.044	▲ 0.215
ppm Water	ppm	ASTM D6304 >2000	371	449.5	▲ 2145

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 126540	---	---
Particles >6µm	ASTM D7647	>5000	▲ 31221	---	---
Particles >14µm	ASTM D7647	>640	54	---	---
Particles >21µm	ASTM D7647	>160	8	---	---
Particles >38µm	ASTM D7647	>40	0	---	---
Particles >71µm	ASTM D7647	>10	0	---	---
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 24/22/13	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.50	0.67	0.619




OIL ANALYSIS REPORT

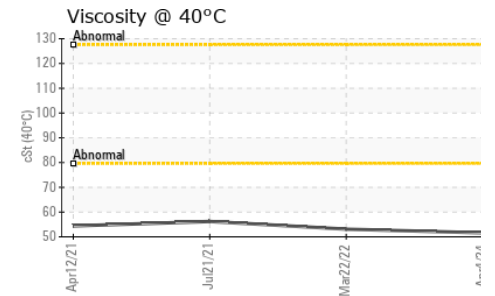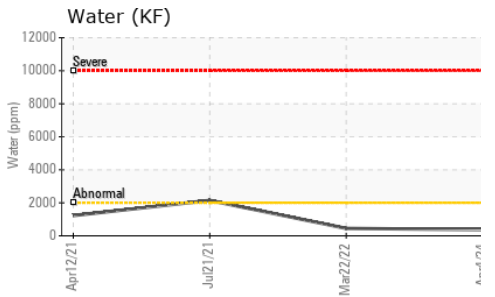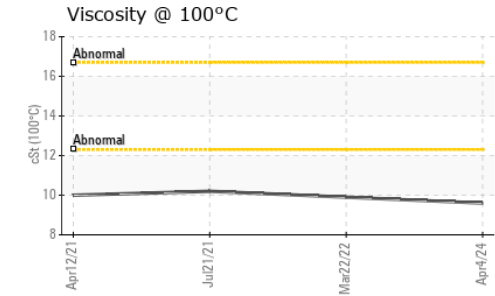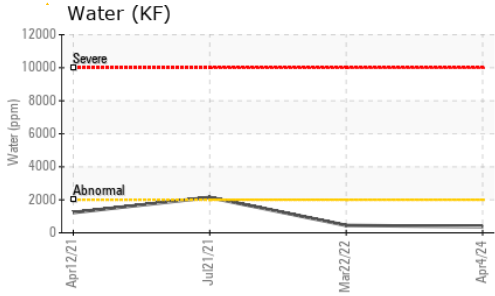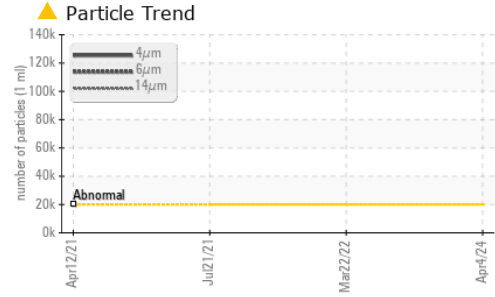






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	51.6	53.1	56.2
Visc @ 100°C	cSt	ASTM D445	9.6	9.9	10.2
Viscosity Index (VI)	Scale	ASTM D2270	173	175	171

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

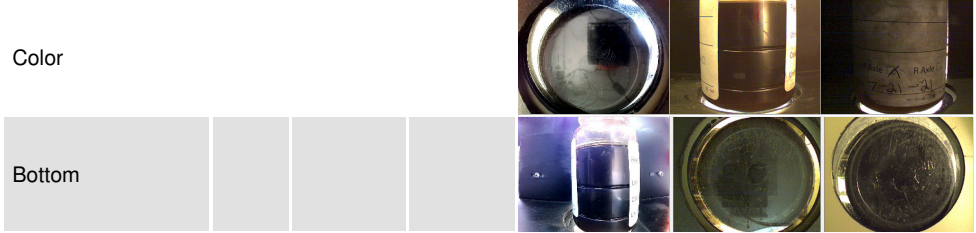

GRAPHS

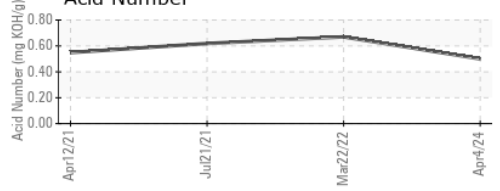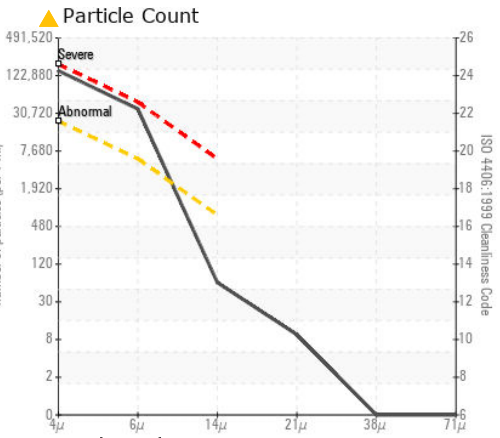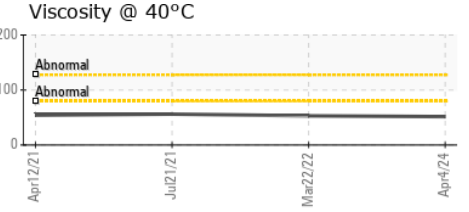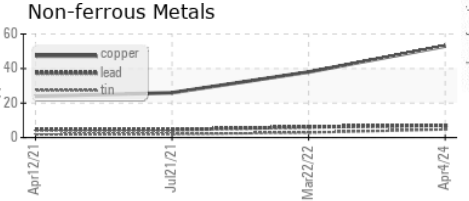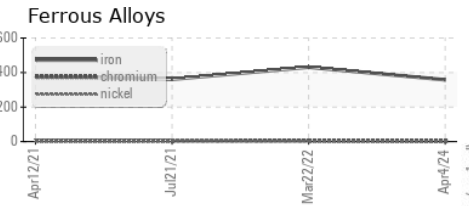

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0900794 **Received** : 16 Apr 2024
Lab Number : 06151066 **Tested** : 18 Apr 2024
Unique Number : 10981144 **Diagnosed** : 19 Apr 2024 - Don Baldrige
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)