

# **OIL ANALYSIS REPORT**

## Area INDIANA CROSSROADS II [200008339] T13 (S/N W-124687)

Hydraulic System

HYDRAULIC OIL FG ISO 32 (--- LTR)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Sample Rating Trend



NORMAL

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		NX06151090		
Sample Date		Client Info		15 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		15		
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	<1		
Lead	ppm	ASTM D5185m	>20	<1		
Copper	ppm	ASTM D5185m	>20	2		
Tin	ppm	ASTM D5185m	>20	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	0		
Molybdenum	ppm	ASTM D5185m	5	0		
Manganese	ppm	ASTM D5185m		1		
Magnesium	ppm	ASTM D5185m	5	2		
Calcium	ppm	ASTM D5185m	12	4		
Phosphorus	ppm	ASTM D5185m	400	597		
Zinc	ppm	ASTM D5185m	12	22		
Sulfur	ppm	ASTM D5185m	650	841		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	2		
Water	%	ASTM D6304	>0.05	0.005		
ppm Water	ppm	ASTM D6304	>500	56		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	710		
Particles >6µm		ASTM D7647	>1300	121		
Particles >14µm		ASTM D7647	>160	10		
Particles >21µm		ASTM D7647	>40	5		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/14/10		

FLUID DEGRADATION Acid Number (AN)

Report Id: NORDEX [WUSCAR] 06151090 (Generated: 04/20/2024 00:38:38) Rev: 1

mg KOH/g ASTM D8045 0.50

0.094

Contact/Location: KEVIN REGAN - NORDEX Page 1 of 2



# **OIL ANALYSIS REPORT**

NONE

NONE

NONE

NONE

LIGHT

NONE

NORML

NORML

NEG

NEG

31.2

Particle Count

Acid Number

491,52

122,88

30.72

7 68

1.920

480

120

31

(B/H0) MOX 0.96

Ê 0.72

-e 0.48

0.00

Mar15

Acid Ni 0.24

(per 1 ml)

no image

no image


no image

no imade

4406

:1999 Cle

14

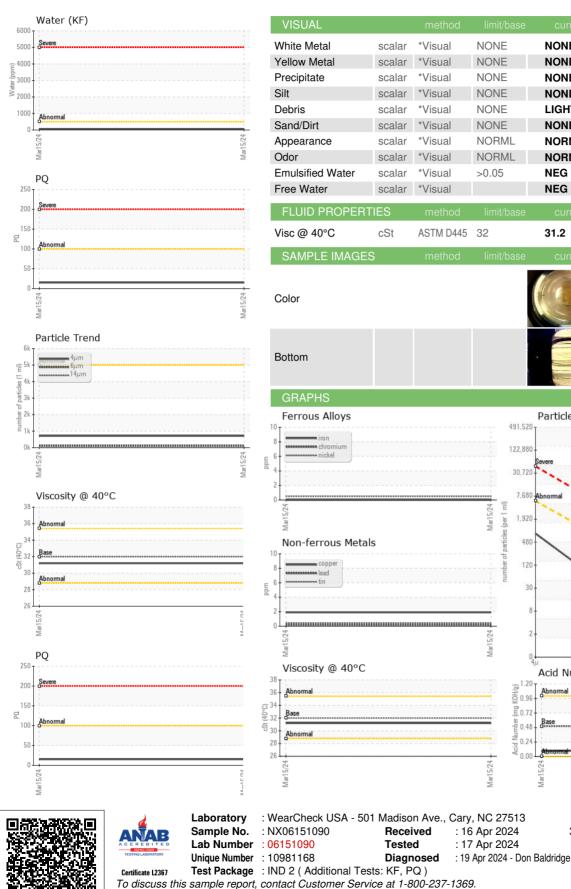

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

KRegan@nordex-online.com T: Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (312)386-7102

300 SOUTH WACKER DRIVE, SUITE 1500

214

28

**NORDEX USA - Chicago** 

Contact: KEVIN REGAN

Report Id: NORDEX [WUSCAR] 06151090 (Generated: 04/20/2024 00:38:38) Rev: 1

Contact/Location: KEVIN REGAN - NORDEX

CHICAGO, IL

US 60606