




# OIL ANALYSIS REPORT

## Sample Rating Trend

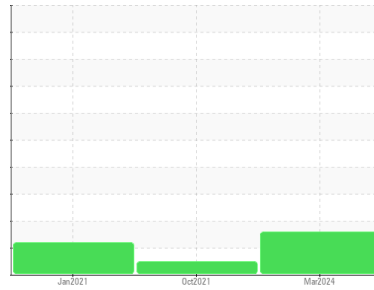

ISO



Machine Id  
**KAESER SX 7.5 5252393 (S/N 1022)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) M-460 (--- GAL)**

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KCPA016377</b>	KCP39891	KCP27766
Sample Date	Client Info			<b>26 Mar 2024</b>	27 Oct 2021	07 Jan 2021
Machine Age	hrs	Client Info		<b>11441</b>	5407	4896
Oil Age	hrs	Client Info		<b>3608</b>	511	1896
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>ATTENTION</b>	NORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	0	<1
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>6</b>	<1	3
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Antimony	ppm	ASTM D5185m		<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>0</b>	10	0
Barium	ppm	ASTM D5185m	90	<b>0</b>	34	2
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>1</b>	0	<1
Magnesium	ppm	ASTM D5185m	100	<b>29</b>	75	55
Calcium	ppm	ASTM D5185m	0	<b>&lt;1</b>	1	<1
Phosphorus	ppm	ASTM D5185m	0	<b>0</b>	0	7
Zinc	ppm	ASTM D5185m	0	<b>4</b>	6	0
Sulfur	ppm	ASTM D5185m	23500	<b>24714</b>	17189	17784

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>1</b>	0	<1
Sodium	ppm	ASTM D5185m		<b>8</b>	16	13
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	1
Water	%	ASTM D6304	>0.05	<b>0.006</b>	0.016	0.010
ppm Water	ppm	ASTM D6304	>500	<b>62</b>	165.3	100.1

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>3410</b>	1568	8444
Particles >6µm		ASTM D7647	>1300	<b>1358</b>	338	▲ 2792
Particles >14µm		ASTM D7647	>80	<b>142</b>	19	▲ 285
Particles >21µm		ASTM D7647	>20	<b>41</b>	5	▲ 75
Particles >38µm		ASTM D7647	>4	<b>3</b>	0	2
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>19/18/14</b>	16/11	▲ 19/15

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.40</b>	0.346	0.422


# OIL ANALYSIS REPORT

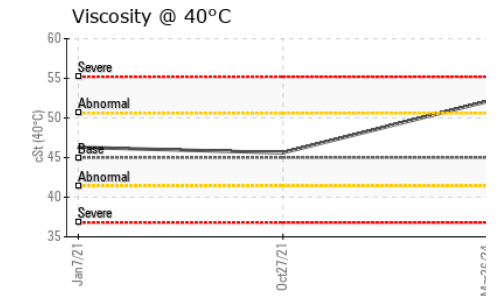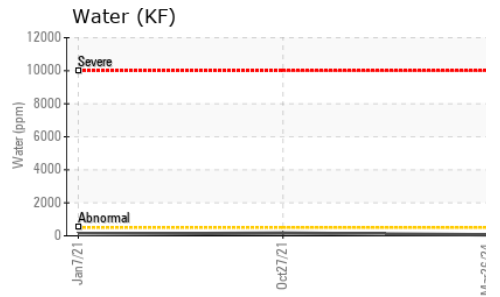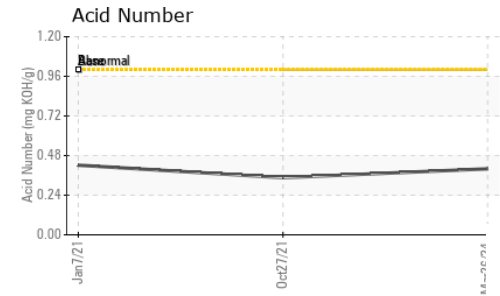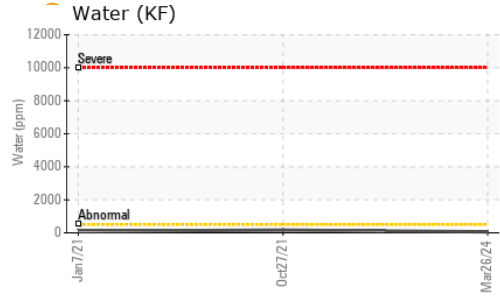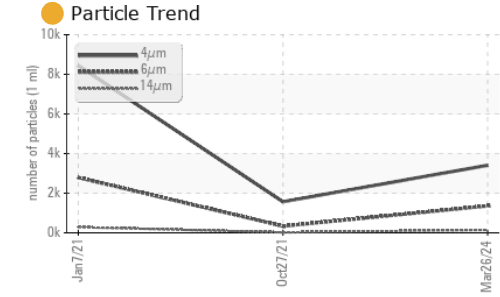





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	52.1	45.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

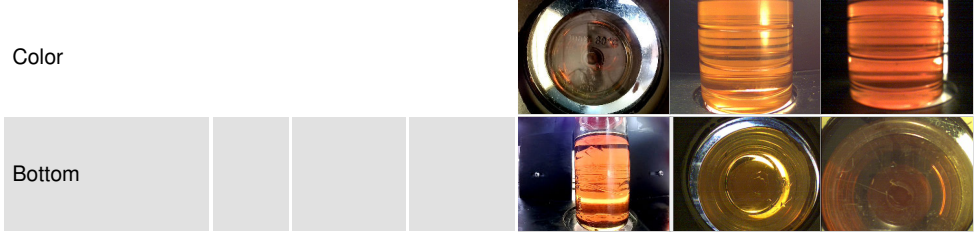

## GRAPHS

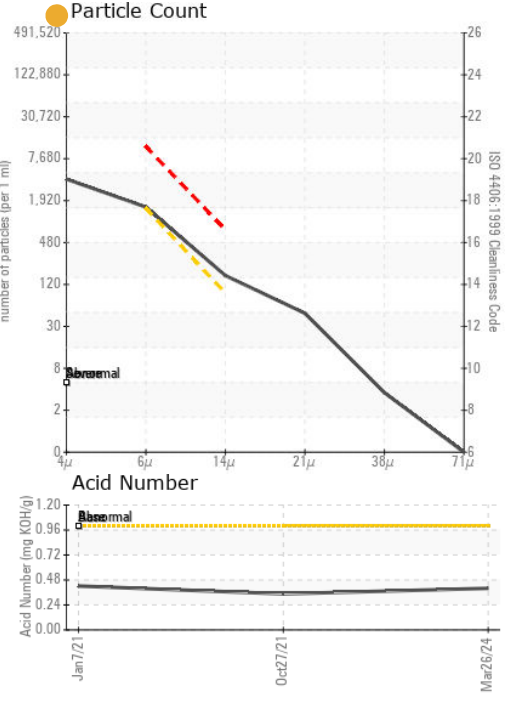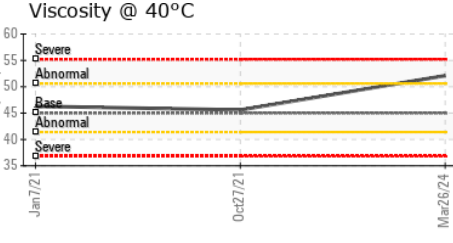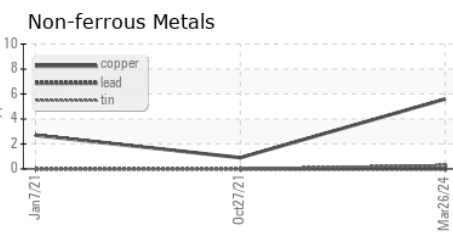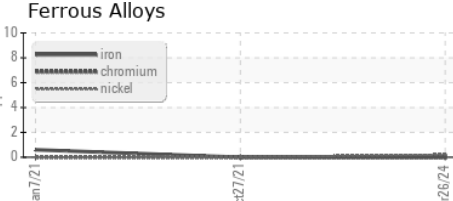

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA016377 **Received** : 16 Apr 2024  
**Lab Number** : 06151183 **Tested** : 19 Apr 2024  
**Unique Number** : 10981261 **Diagnosed** : 19 Apr 2024 - Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**PILATUS BUSINESS AIRCRAFT**  
 12300 PILATUS WAY  
 BROOMFIELD, CO  
 US 80021  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)