




# OIL ANALYSIS REPORT

## Sample Rating Trend

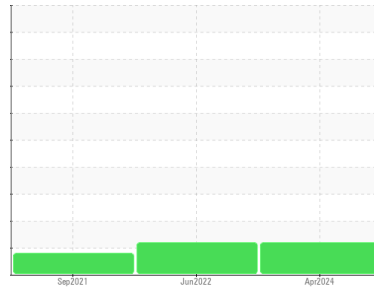

ISO



Machine Id

**KAESER 7571469**

Component

**Compressor**

Fluid

**KAESER SIGMA (OEM) M-460 (--- GAL)**

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KCPA017144</b>	KCP51406	KCP36447
Sample Date	Client Info			<b>10 Apr 2024</b>	08 Jun 2022	23 Sep 2021
Machine Age	hrs	Client Info		<b>18857</b>	7516	3475
Oil Age	hrs	Client Info		<b>4000</b>	2500	3475
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>ATTENTION</b>	ATTENTION	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	<1	<1
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>3	<b>&lt;1</b>	1	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>10	<b>1</b>	2	0
Lead	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>50	<b>4</b>	2	2
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	1	0
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>0</b>	<1	0
Barium	ppm	ASTM D5185m	90	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	100	<b>39</b>	52	53
Calcium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Phosphorus	ppm	ASTM D5185m	0	<b>0</b>	9	12
Zinc	ppm	ASTM D5185m	0	<b>15</b>	9	2
Sulfur	ppm	ASTM D5185m	23500	<b>25046</b>	23338	17884

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>1</b>	2	1
Sodium	ppm	ASTM D5185m		<b>24</b>	24	17
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	6	22
Water	%	ASTM D6304	>0.05	<b>0.009</b>	0.025	0.024
ppm Water	ppm	ASTM D6304	>500	<b>99</b>	254.8	249.5

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>4572</b>	3506	23725
Particles >6µm		ASTM D7647	>1300	<b>1055</b>	853	▲ 8778
Particles >14µm		ASTM D7647	>80	● <b>113</b>	● 89	● 113
Particles >21µm		ASTM D7647	>20	● <b>31</b>	● 28	14
Particles >38µm		ASTM D7647	>4	<b>2</b>	2	0
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	● <b>19/17/14</b>	● 19/17/14	▲ 20/14

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.38</b>	0.39	0.343


# OIL ANALYSIS REPORT

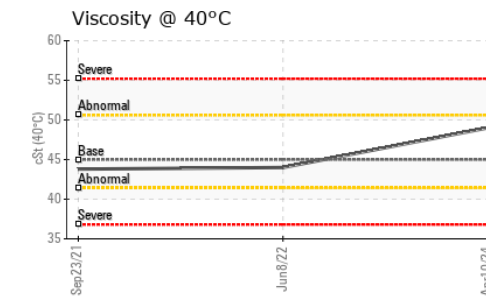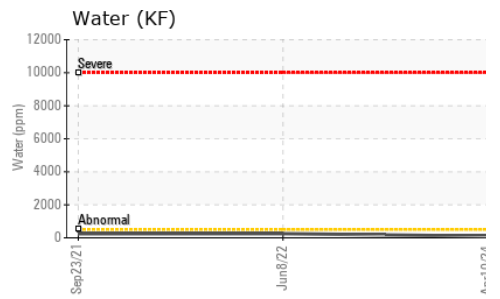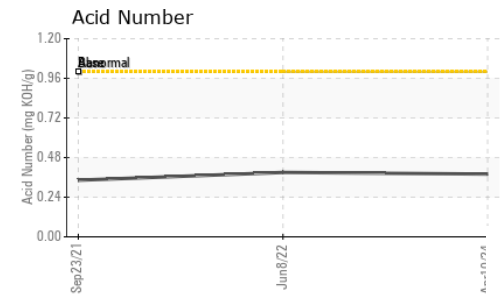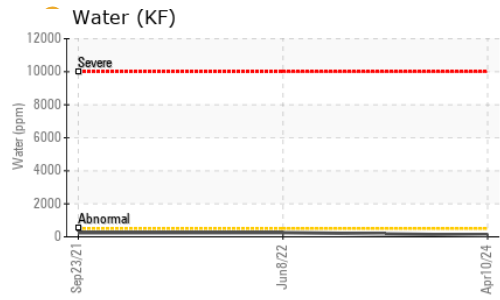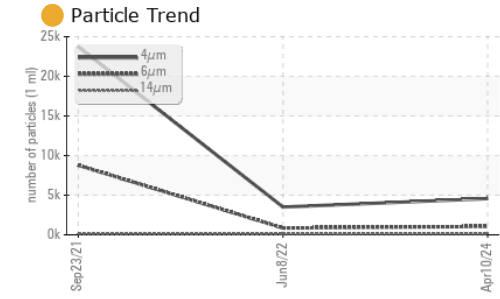




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 45	49.0	44.0	43.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

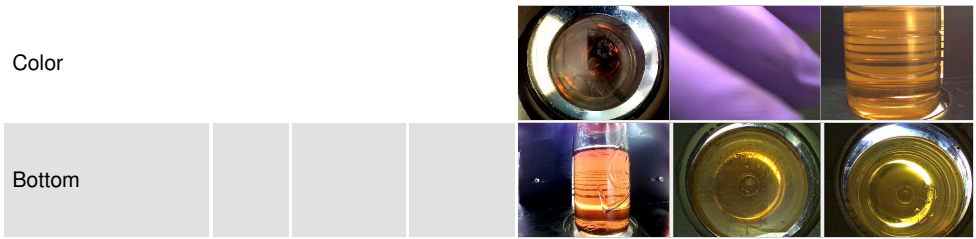

## GRAPHS

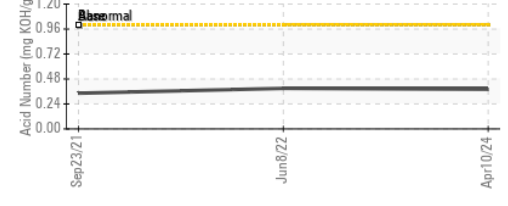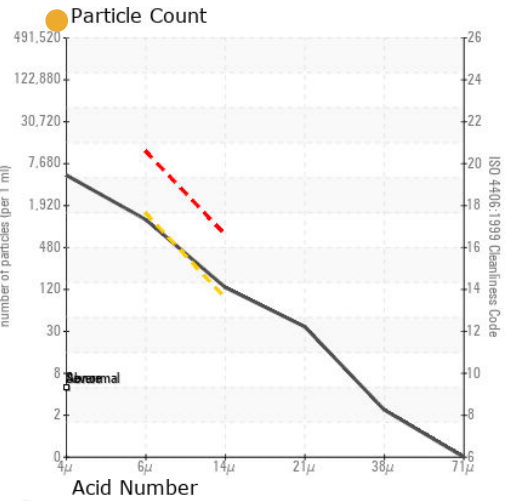

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA017144 **Received** : 16 Apr 2024  
**Lab Number** : 06151190 **Tested** : 19 Apr 2024  
**Unique Number** : 10981268 **Diagnosed** : 19 Apr 2024 - Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**KREILKAMP TRUCKING**  
 6487 HWY 175  
 ALLENTON, WI  
 US 53002  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)