




# OIL ANALYSIS REPORT

## Sample Rating Trend

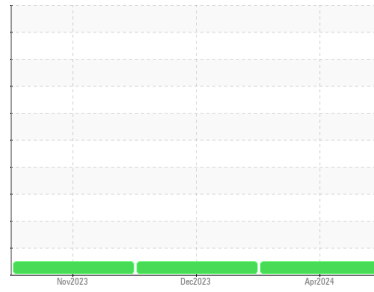

**NORMAL**



Machine Id  
**91054**  
 Component  
**Diesel Engine**  
 Fluid  
**AMG (10 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>SBP0007020</b>	SBP0006014	SBP0005017
Sample Date	Client Info			<b>10 Apr 2024</b>	21 Dec 2023	01 Nov 2023
Machine Age	mls	Client Info		<b>566610</b>	545775	542254
Oil Age	mls	Client Info		<b>20835</b>	3521	60000
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>19</b>	<1	24
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>14</b>	3	11
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>150	<b>0</b>	0	4
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>1</b>	0	1
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>62</b>	55	63
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	1
Magnesium	ppm	ASTM D5185m		<b>1011</b>	937	1056
Calcium	ppm	ASTM D5185m		<b>1124</b>	974	1149
Phosphorus	ppm	ASTM D5185m		<b>1049</b>	1024	1146
Zinc	ppm	ASTM D5185m		<b>1295</b>	1294	1431
Sulfur	ppm	ASTM D5185m		<b>3316</b>	3099	3140

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>9</b>	2	5
Sodium	ppm	ASTM D5185m		<b>0</b>	0	3
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.9</b>	0.3	1.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.7</b>	6.0	11.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.1</b>	19.0	25.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.0</b>	14.6	22.3
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.5</b>	9.4	7.2




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

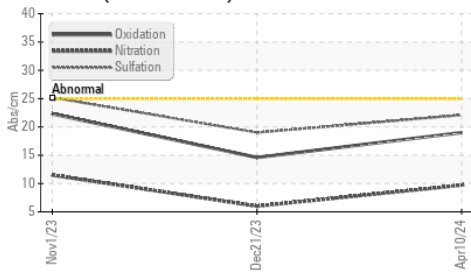

Base Number

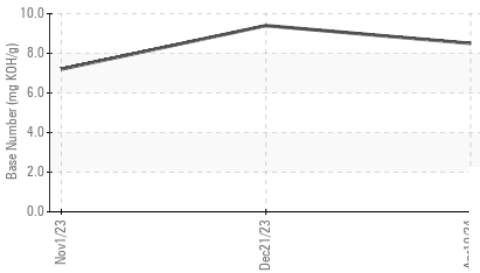

Viscosity @ 100°C

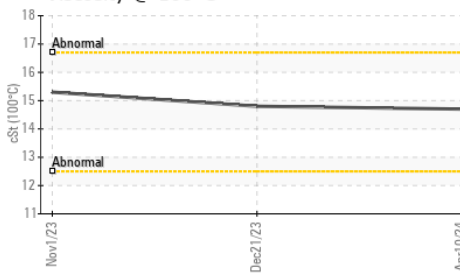


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.7	14.8	15.3

## GRAPHS


Ferrous Alloys

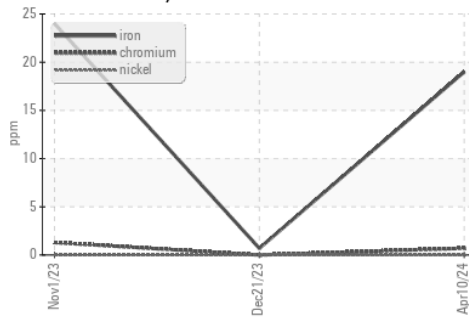


Non-ferrous Metals

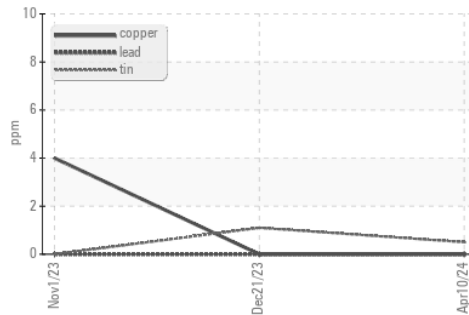

Viscosity @ 100°C

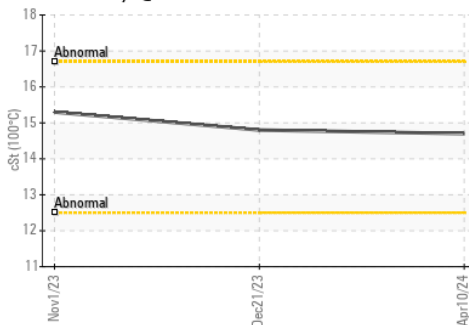

Base Number

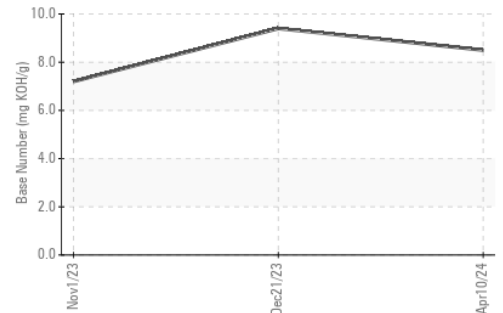

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0007020  
**Lab Number** : 06151480  
**Unique Number** : 10981558  
**Test Package** : FLEET

**Received** : 17 Apr 2024  
**Tested** : 18 Apr 2024  
**Diagnosed** : 18 Apr 2024 - Wes Davis

**Sapp Bros. Fleet - Omaha Petroleum Location**  
 9915 South 148th  
 OMAHA, NE  
 US 68138  
 Contact: Stephanie Kelly  
 skelly@sappbros.net  
 T: (800)211-8589  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)