




OIL ANALYSIS REPORT

Sample Rating Trend

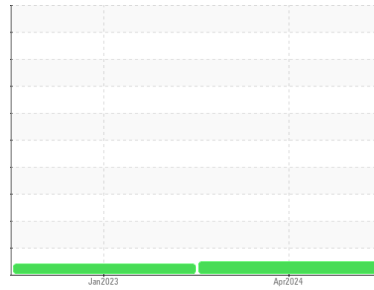

NORMAL



Area

{UNASSIGNED}

Machine Id

97027

Component

1 Diesel Engine

Fluid

AMERIGUARD 10W30 (30000 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		SBP0007029	SBP0001727	---
Sample Date	Client Info		05 Apr 2024	09 Jan 2023	---
Machine Age	mls	Client Info	51570	15000	---
Oil Age	mls	Client Info	36570	15000	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			NORMAL	ATTENTION	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	0.9	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>90	50	15	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>2	0	0	---
Titanium	ppm	ASTM D5185m	>2	0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>20	2	0	---
Lead	ppm	ASTM D5185m	>40	0	0	---
Copper	ppm	ASTM D5185m	>330	0	19	---
Tin	ppm	ASTM D5185m	>15	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		4	11	---
Barium	ppm	ASTM D5185m		0	2	---
Molybdenum	ppm	ASTM D5185m		60	50	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		911	760	---
Calcium	ppm	ASTM D5185m		1114	1208	---
Phosphorus	ppm	ASTM D5185m		1040	963	---
Zinc	ppm	ASTM D5185m		1236	1154	---
Sulfur	ppm	ASTM D5185m		3029	2736	---

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	7	5	---
Sodium	ppm	ASTM D5185m		<1	0	---
Potassium	ppm	ASTM D5185m	>20	<1	2	---

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>6	0.4	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	15.2	8.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	32.0	21.1	---


FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	39.4	19.4	---
Base Number (BN)	mg KOH/g	ASTM D2896		2.1	8.2	---




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

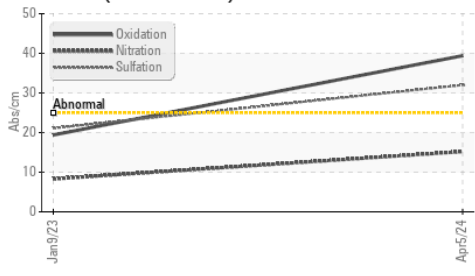

Base Number

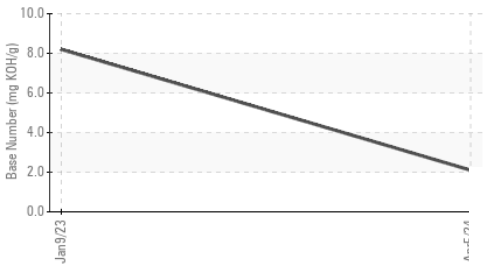





Viscosity @ 100°C

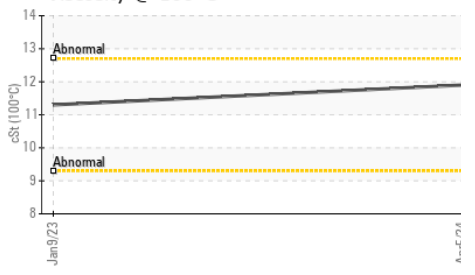

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.9	11.3	---

GRAPHS

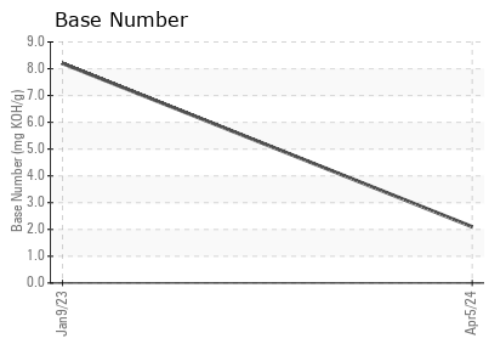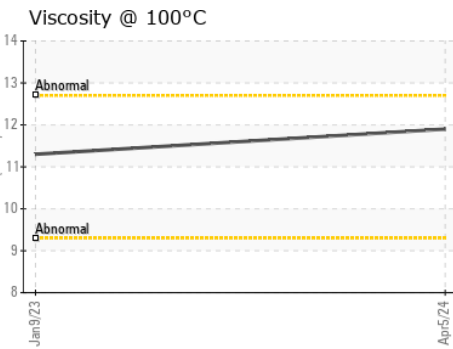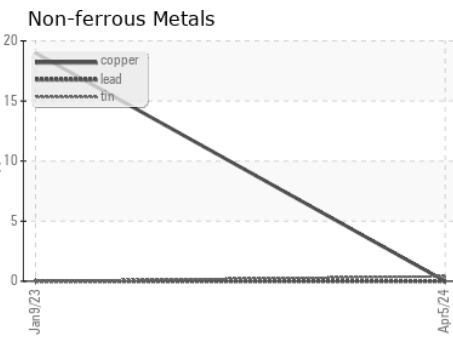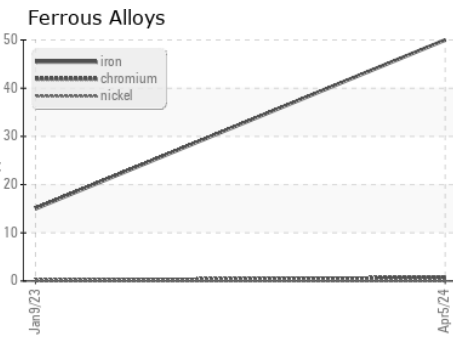

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0007029 **Received** : 17 Apr 2024
Lab Number : 06151482 **Tested** : 18 Apr 2024
Unique Number : 10981560 **Diagnosed** : 19 Apr 2024 - Sean Felton
Test Package : FLEET

Sapp Bros. Fleet - Omaha Petroleum Location
 9915 South 148th
 OMAHA, NE 68138
 US 68138
 Contact: Stephanie Kelly
 skelly@sappbros.net
 T: (800)211-8589
 F:

To discuss this sample report, CONTACT Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)