




OIL ANALYSIS REPORT

Sample Rating Trend

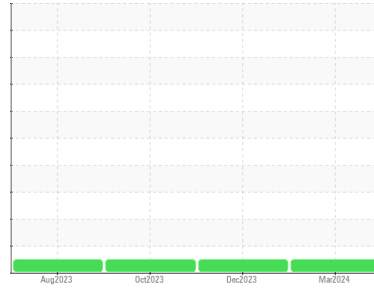

NORMAL



Area

2M34

Machine Id

JTK9528

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 40 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			ARI0007523	ARI0007484	ARI0006846
Sample Date	Client Info			27 Mar 2024	28 Dec 2023	19 Oct 2023
Machine Age	mls	Client Info		18727	16634	13791
Oil Age	mls	Client Info		4936	2843	4815
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	14	8	19
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	12	6	4
Lead	ppm	ASTM D5185m	>40	0	<1	<1
Copper	ppm	ASTM D5185m	>330	0	<1	3
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	83	100	388
Barium	ppm	ASTM D5185m	10	0	0	4
Molybdenum	ppm	ASTM D5185m	100	88	88	92
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	450	93	120	364
Calcium	ppm	ASTM D5185m	3000	2110	1873	1382
Phosphorus	ppm	ASTM D5185m	1150	979	1043	1105
Zinc	ppm	ASTM D5185m	1350	1125	1153	1216
Sulfur	ppm	ASTM D5185m	4250	3932	3630	3488




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	5	8
Sodium	ppm	ASTM D5185m	>216	0	1	0
Potassium	ppm	ASTM D5185m	>20	7	8	6

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.3	0.6	0.4
Nitration	Abs/cm	*ASTM D7624	>20	9.1	9.6	7.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.2	21.0	22.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.7	16.7	16.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.8	7.2	7.8







OIL ANALYSIS REPORT

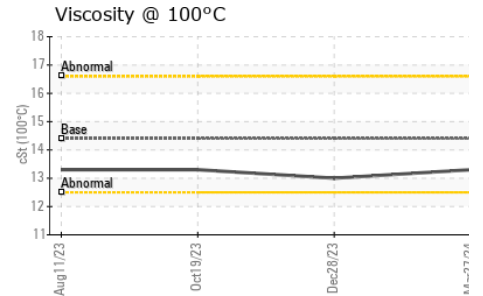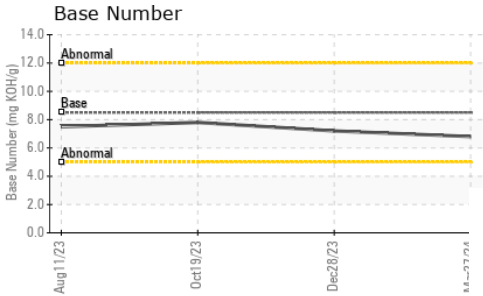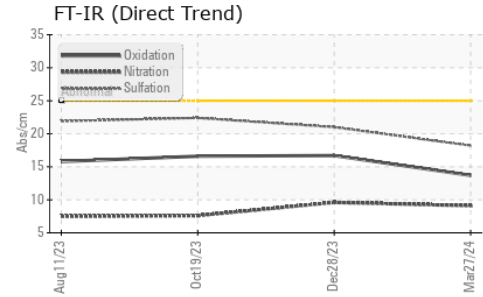

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	13.3	13.0	13.3

GRAPHS

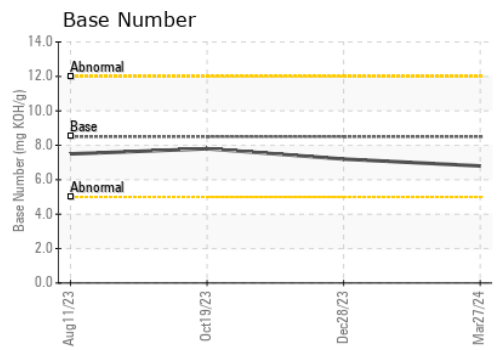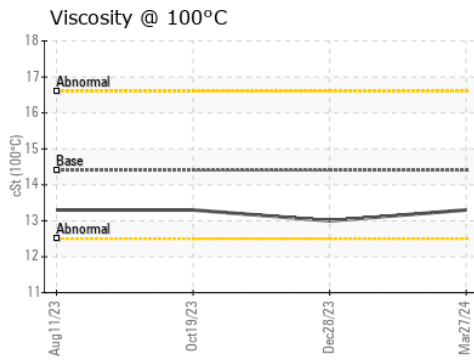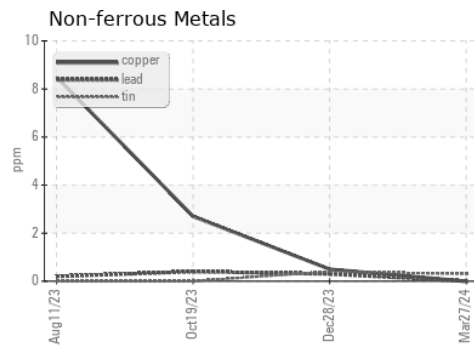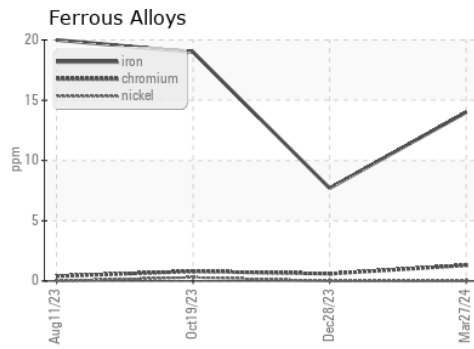

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ARI0007523 **Received** : 17 Apr 2024
Lab Number : **06151495** **Tested** : 18 Apr 2024
Unique Number : 10981573 **Diagnosed** : 18 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

INSITUFORM TECHNOLOGIES, INC
 709 EAST ORDNANCE ROAD SUITE 501
 BALTIMORE, MD
 US 21226
 Contact: ALBERT FRIEDRICH
 AFRIEDRICH@INSITUFORM.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)