



OIL ANALYSIS REPORT

Sample Rating Trend



WEAR



Area
SEAGATE TERMINALS
Machine Id
VOLVO L120H 633352

Component
Diesel Engine
Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)



DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

The aluminum level is abnormal. All other metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	ML0000732	---	---
Sample Date	Client Info	03 Apr 2024	---	---
Machine Age	hrs Client Info	817	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >6.0	<1.0	---	---
Water	WC Method >0.1	NEG	---	---
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >100	55	---	---
Chromium ppm	ASTM D5185m >10	4	---	---
Nickel ppm	ASTM D5185m >10	0	---	---
Titanium ppm	ASTM D5185m	<1	---	---
Silver ppm	ASTM D5185m >2	1	---	---
Aluminum ppm	ASTM D5185m >10	▲ 58	---	---
Lead ppm	ASTM D5185m >20	4	---	---
Copper ppm	ASTM D5185m >15	28	---	---
Tin ppm	ASTM D5185m >10	6	---	---
Vanadium ppm	ASTM D5185m	0	---	---
Cadmium ppm	ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m 2.5	24	---	---
Barium ppm	ASTM D5185m 0.0	20	---	---
Molybdenum ppm	ASTM D5185m 0.7	47	---	---
Manganese ppm	ASTM D5185m 0.0	2	---	---
Magnesium ppm	ASTM D5185m 256	702	---	---
Calcium ppm	ASTM D5185m 2057	1399	---	---
Phosphorus ppm	ASTM D5185m 935	950	---	---
Zinc ppm	ASTM D5185m 1223	1111	---	---
Sulfur ppm	ASTM D5185m 4079	3369	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >20	16	---	---
Sodium ppm	ASTM D5185m	4	---	---
Potassium ppm	ASTM D5185m >20	9	---	---





INFRA-RED

method	limit/base	current	history1	history2
Soot %	*ASTM D7844 >3	0.6	---	---
Nitration	*ASTM D7624 >20	8.6	---	---
Sulfation	*ASTM D7415 >30	22.0	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	18.7	---	---
Base Number (BN)	mg KOH/g ASTM D2896 10	8.7	---	---





OIL ANALYSIS REPORT

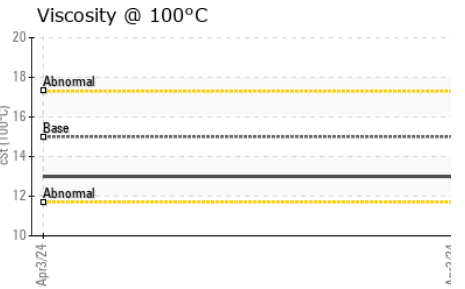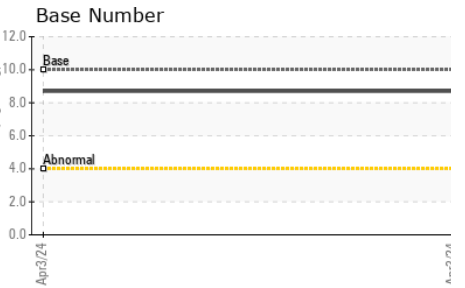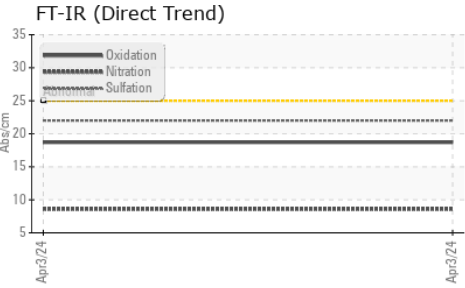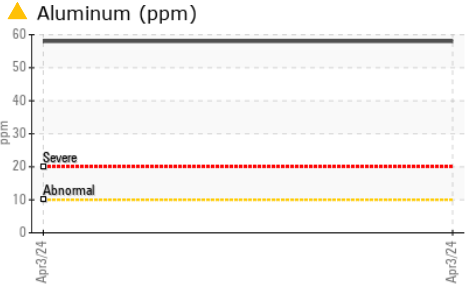

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.0	13.0	---

GRAPHS

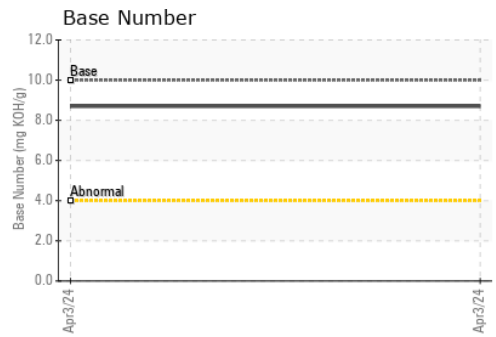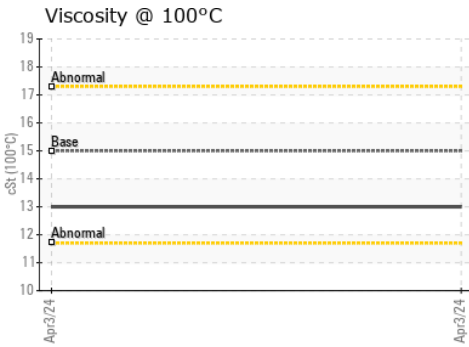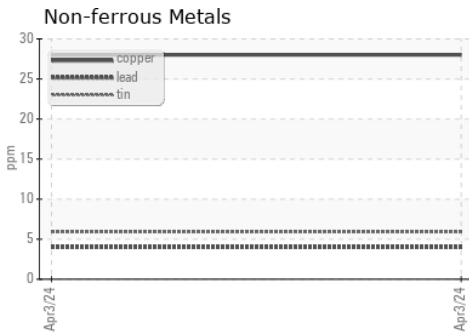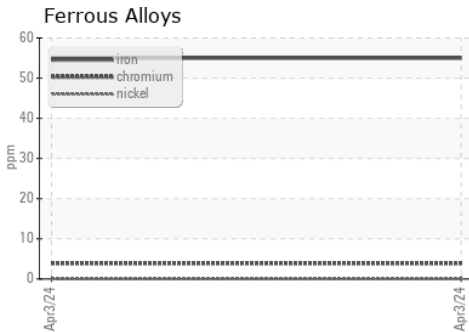

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0000732
Lab Number : **06151503**
Unique Number : 10981581
Test Package : CONST (Additional Tests: TBN)

Received : 17 Apr 2024
Tested : 18 Apr 2024
Diagnosed : 19 Apr 2024 - Don Baldrige

McCLUNG-LOGAN EQUIPMENT CO - CHESAPEAKE
 4112 HOLLAND BLVD
 CHESAPEAKE, VA
 US 23323
 Contact: TOMMY GRIFFIN
 tgriffin@mcclung-logan.com
 T: (757)485-3314
 F: (757)485-3415