




# OIL ANALYSIS REPORT



Area  
**COLORADO/443**  
 Machine Id  
**53.157L [COLORADO^443]**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL MOBILTRANS AST 30 (9)**

Sample Rating Trend

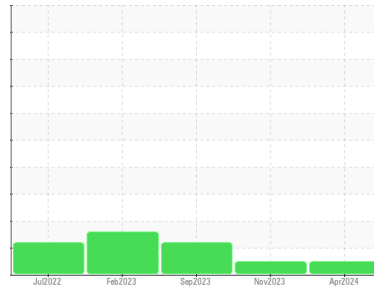

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0918159</b>	WC0833777	WC0823057
Sample Date	Client Info		<b>08 Apr 2024</b>	16 Nov 2023	14 Sep 2023
Machine Age	hrs	Client Info	<b>1836</b>	1513	1369
Oil Age	hrs	Client Info	<b>323</b>	1513	1369
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	ATTENTION

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>6</b>	10	12
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >10	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>&lt;1</b>	1	<1
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	3	2
Copper	ppm	ASTM D5185m >75	<b>2</b>	3	4
Tin	ppm	ASTM D5185m >10	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>20</b>	4	2
Barium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>12</b>	5	3
Calcium	ppm	ASTM D5185m	<b>1799</b>	564	529
Phosphorus	ppm	ASTM D5185m	<b>779</b>	738	759
Zinc	ppm	ASTM D5185m	<b>893</b>	923	977
Sulfur	ppm	ASTM D5185m	<b>3447</b>	2122	2461

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>3</b>	2	2
Sodium	ppm	ASTM D5185m	<b>3</b>	2	1
Potassium	ppm	ASTM D5185m >20	<b>7</b>	2	2

## FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>5287</b>	1277	8222
Particles >6µm	ASTM D7647	>2500	<b>434</b>	146	449
Particles >14µm	ASTM D7647	>640	<b>23</b>	10	23
Particles >21µm	ASTM D7647	>160	<b>5</b>	3	6
Particles >38µm	ASTM D7647	>40	<b>1</b>	0	1
Particles >71µm	ASTM D7647	>10	<b>1</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>--/18/16	<b>20/16/12</b>	17/14/10	20/16/12

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>1.16</b>	0.626	0.68




# OIL ANALYSIS REPORT

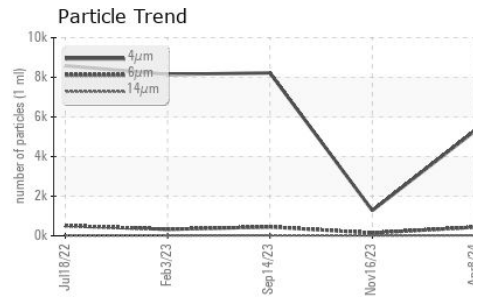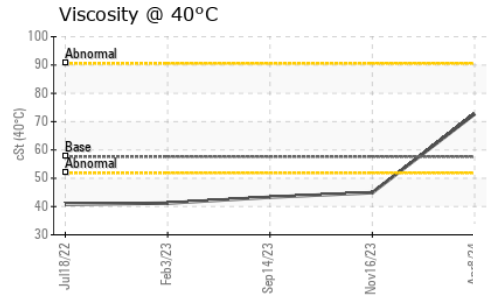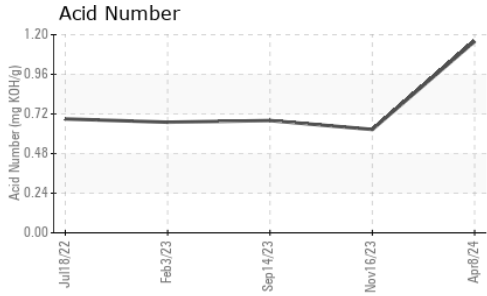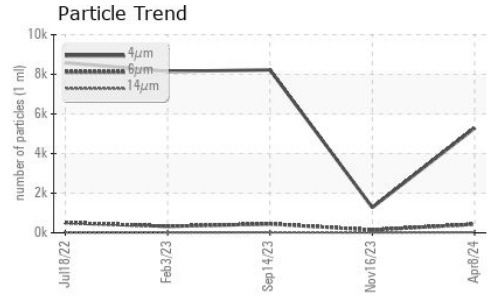






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.6	72.7	44.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

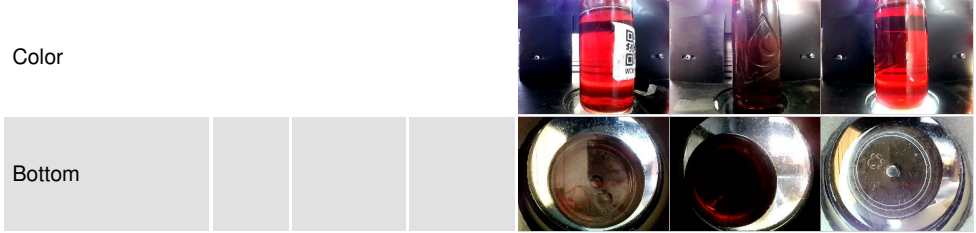

## GRAPHS

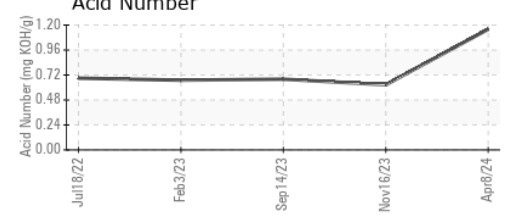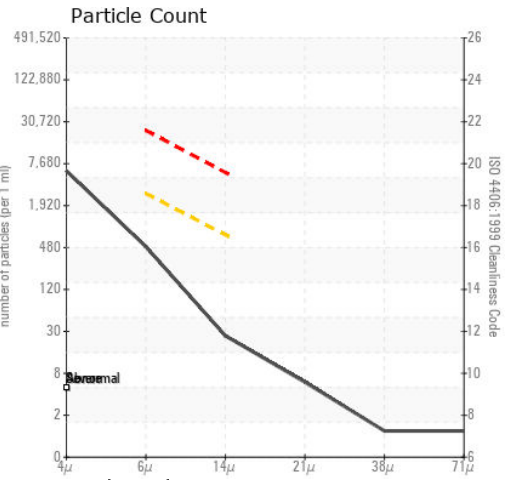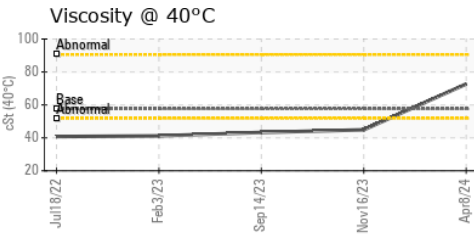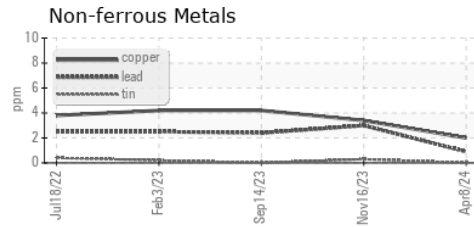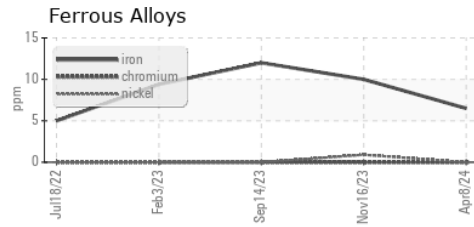

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0918159      **Received** : 17 Apr 2024  
**Lab Number** : 06151922      **Tested** : 18 Apr 2024  
**Unique Number** : 10982000      **Diagnosed** : 19 Apr 2024 - Don Baldrige  
**Test Package** : CONST

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: BILL ORCUTT  
 william.orcutt@wildcat.net  
 T: (719)499-6303  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)