




# OIL ANALYSIS REPORT

## Sample Rating Trend

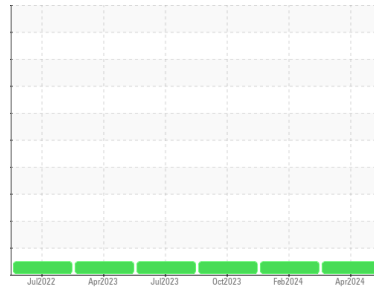

**NORMAL**



Area

**CIS After Cure**

Machine Id

**[CIS After Cure] 361208008 - LIFT TABLE**

Component

**Hydraulic System**

Fluid

**SHELL TELLUS S2 MX 46 (80 LTR)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>TLC0001765</b>	TLC0001389	TLC0001083
Sample Date	Client Info			<b>11 Apr 2024</b>	01 Feb 2024	19 Oct 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>30	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>25	<b>16</b>	16	16
Tin	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	0	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m	70	<b>&lt;1</b>	2	3
Calcium	ppm	ASTM D5185m	10	<b>36</b>	40	42
Phosphorus	ppm	ASTM D5185m	300	<b>235</b>	269	264
Zinc	ppm	ASTM D5185m	325	<b>261</b>	317	309
Sulfur	ppm	ASTM D5185m	665	<b>1356</b>	1419	1368





CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>0</b>	<1	<1
Sodium	ppm	ASTM D5185m		<b>2</b>	<1	0
Potassium	ppm	ASTM D5185m	>20	<b>11</b>	0	0
Water	%	ASTM D6304	>0.05	<b>NEG</b>	NEG	NEG

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>607</b>	648	978
Particles >6µm		ASTM D7647	>1300	<b>181</b>	164	244
Particles >14µm		ASTM D7647	>160	<b>24</b>	17	24
Particles >21µm		ASTM D7647	>40	<b>9</b>	4	8
Particles >38µm		ASTM D7647	>10	<b>1</b>	0	1
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>16/15/12</b>	17/15/11	17/15/12

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.35	<b>0.27</b>	0.22	0.24



# OIL ANALYSIS REPORT

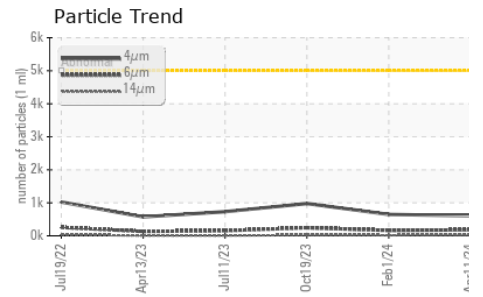
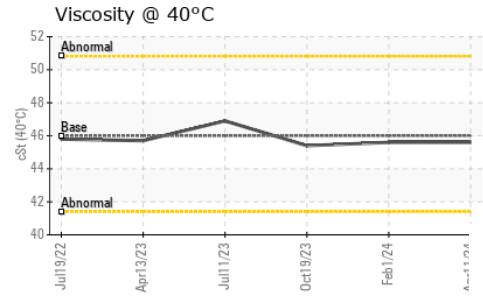
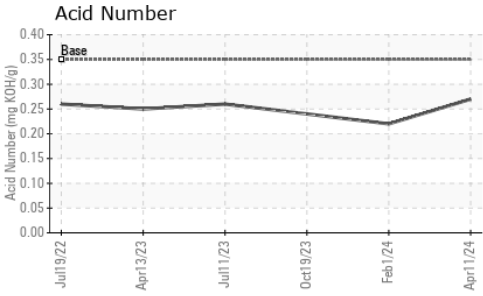
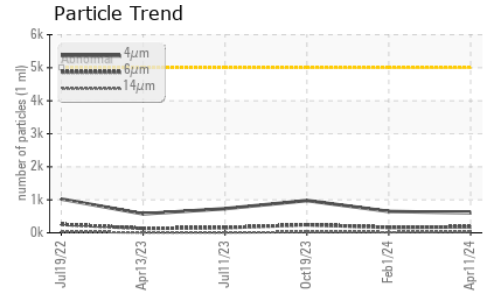


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	46.0	<b>45.6</b>	45.6	45.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

## GRAPHS

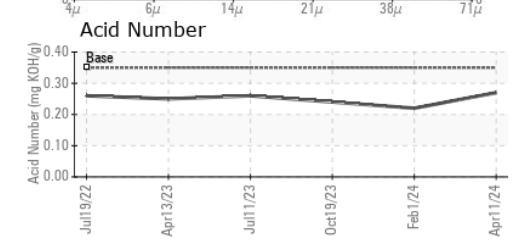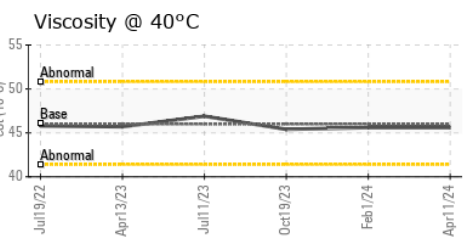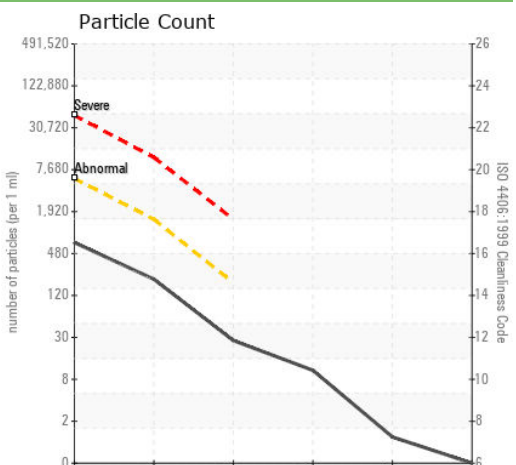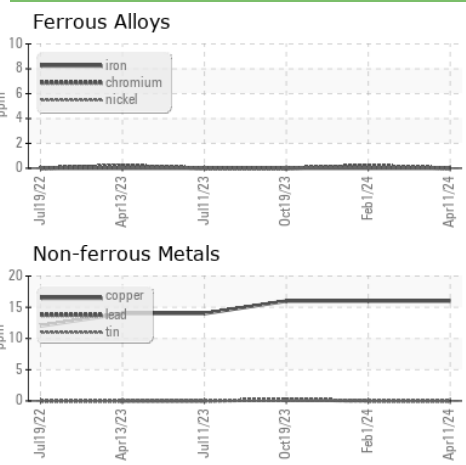

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TLC0001765      **Received** : 17 Apr 2024  
**Lab Number** : **06151943**      **Tested** : 19 Apr 2024  
**Unique Number** : 10982021      **Diagnosed** : 19 Apr 2024 - Don Baldrige  
**Test Package** : PLANT

**MICHELIN US 10**  
 16 BIBB WAY  
 ANDERSON, SC  
 US 29626  
 Contact: TERRICK PRESLEY  
 terrick.presley@michelin.com  
 T: (803)761-8053  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)