




# OIL ANALYSIS REPORT

## Sample Rating Trend

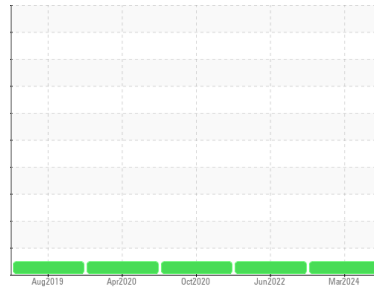

**NORMAL**



Machine Id  
**BABY (S/N H08A0498022)**  
 Component  
**Hydraulic System**  
 Fluid  
**TRC HYDRAULIC OIL 15W (498 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>TR06151960</b>	TR05563495	TR05106324
Sample Date	Client Info			<b>30 Mar 2024</b>	03 Jun 2022	30 Oct 2020
Machine Age	hrs	Client Info		<b>140112</b>	5760	10120
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Not Changed</b>	Not Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	1
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	<1	1
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>75	<b>&lt;1</b>	2	22
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	<1






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	2
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m		<b>0</b>	0	<1
Calcium	ppm	ASTM D5185m		<b>86</b>	98	83
Phosphorus	ppm	ASTM D5185m		<b>640</b>	707	734
Zinc	ppm	ASTM D5185m		<b>779</b>	938	907
Sulfur	ppm	ASTM D5185m		<b>1682</b>	1744	1698

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Sodium	ppm	ASTM D5185m		<b>4</b>	0	<1
Potassium	ppm	ASTM D5185m	>20	<b>11</b>	0	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>2332</b>	4202	1899
Particles >6µm		ASTM D7647	>1300	<b>599</b>	862	459
Particles >14µm		ASTM D7647	>160	<b>35</b>	62	50
Particles >21µm		ASTM D7647	>40	<b>7</b>	13	16
Particles >38µm		ASTM D7647	>10	<b>0</b>	2	2
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>18/16/12</b>	19/17/13	18/16/13



# OIL ANALYSIS REPORT

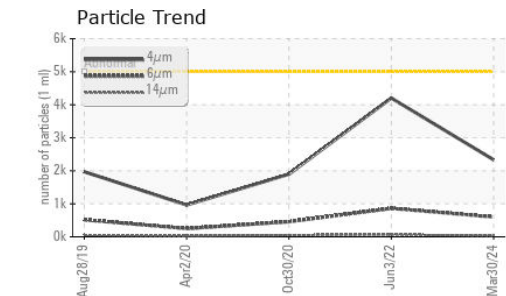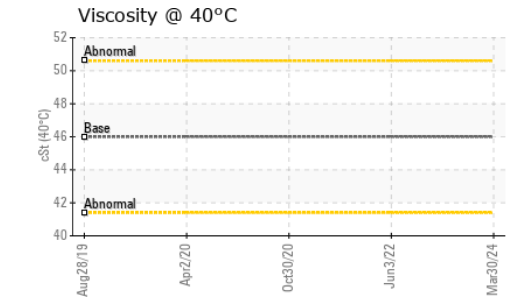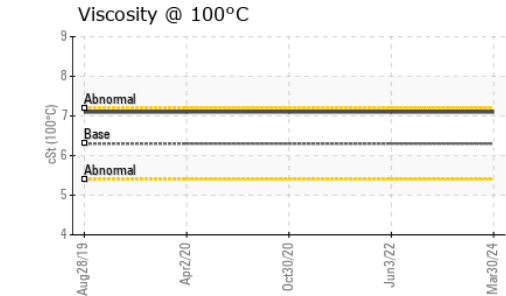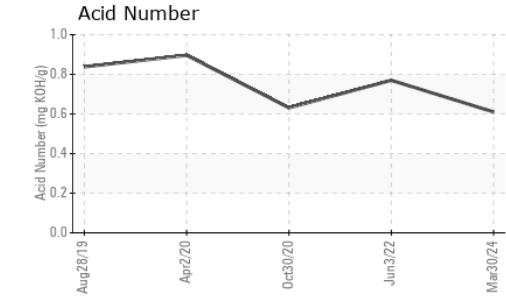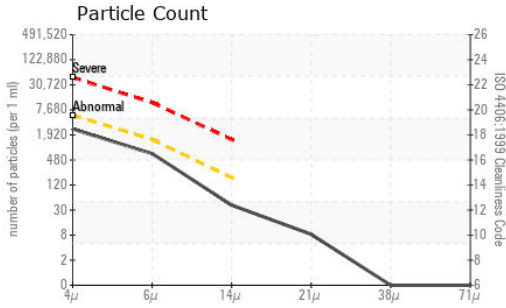


FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.61</b>	0.77	0.631

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	46	<b>46.7</b>	---	---
Visc @ 100°C	cSt	ASTM D445	6.3	<b>7.1</b>	7.1	7.1
Viscosity Index (VI)	Scale	ASTM D2270		<b>110</b>	---	---

### SAMPLE IMAGES

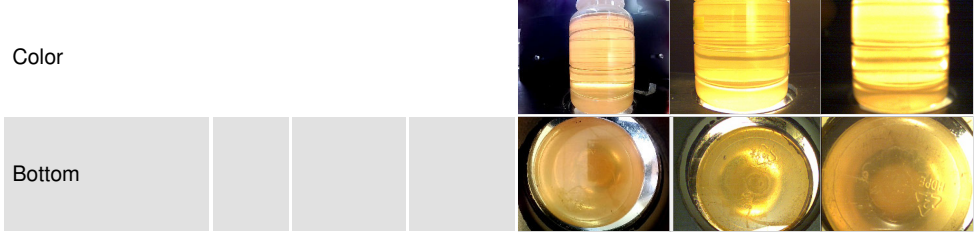

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TR06151960      **Received** : 17 Apr 2024  
**Lab Number** : **06151960**      **Tested** : 18 Apr 2024  
**Unique Number** : 10982038      **Diagnosed** : 18 Apr 2024 - Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: KV100, VI )

**PELICAN PRODUCTS INC**  
 23215 EARLY AVE  
 TORRANCE, CA  
 US 90505  
 Contact: NORMAN MASSON

To discuss this sample report, contact Customer Service at 1-800-827-0711.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)