




OIL ANALYSIS REPORT

Sample Rating Trend

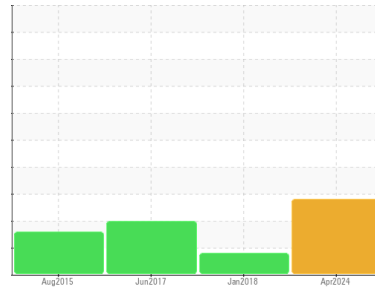

ISO



Machine Id
CAN RIG RIG 15B CAN RIG (S/N 062813)
 Component
Hydraulic System
 Fluid
PROTECK AW 68 (60 GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		RP0037437	RP177095	RP177039
Sample Date	Client Info		07 Apr 2024	05 Jan 2018	13 Jun 2017
Machine Age	hrs	Client Info	5793	4818	3521
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	Not Changd	N/A
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	5	2	3
Chromium	ppm	ASTM D5185m >20	0	0	<1
Nickel	ppm	ASTM D5185m >20	0	0	0
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >20	<1	<1	1
Lead	ppm	ASTM D5185m >20	0	2	1
Copper	ppm	ASTM D5185m >20	6	8	8
Tin	ppm	ASTM D5185m >20	0	<1	0
Antimony	ppm	ASTM D5185m	---	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<1	<1
Barium	ppm	ASTM D5185m	<1	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1
Manganese	ppm	ASTM D5185m	0	0	<1
Magnesium	ppm	ASTM D5185m	0	0	0
Calcium	ppm	ASTM D5185m	17	0	15
Phosphorus	ppm	ASTM D5185m	232	233	244
Zinc	ppm	ASTM D5185m	103	37	174

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	2	6	2
Sodium	ppm	ASTM D5185m	3	<1	<1
Potassium	ppm	ASTM D5185m >20	9	0	4
Water	%	ASTM D6304 >0.05	0.003	0.002	0.004
ppm Water	ppm	ASTM D6304 >500	34	20	40






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 109672	▲ 19634	▲ 135703
Particles >6µm	ASTM D7647	>1300	▲ 47895	▲ 3062	▲ 29881
Particles >14µm	ASTM D7647	>160	▲ 3600	112	▲ 462
Particles >21µm	ASTM D7647	>40	▲ 791	24	▲ 54
Particles >38µm	ASTM D7647	>10	▲ 42	2	3
Particles >71µm	ASTM D7647	>3	▲ 5	1	1
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 24/23/19	▲ 21/19/14	▲ 24/22/16

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.14	0.180	0.244


OIL ANALYSIS REPORT

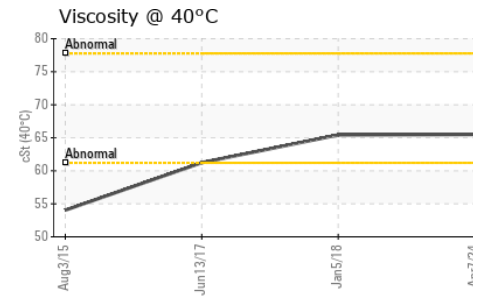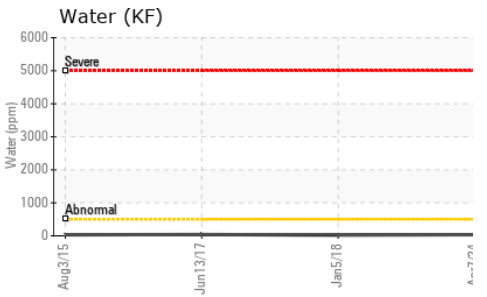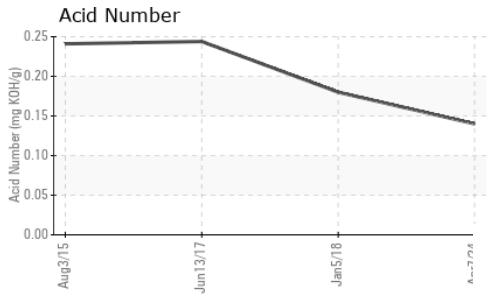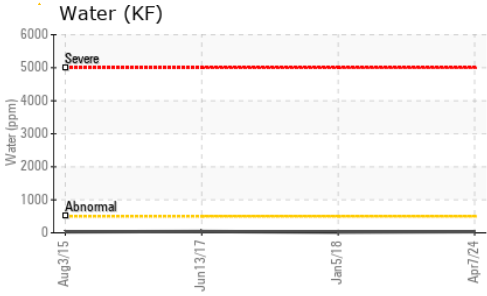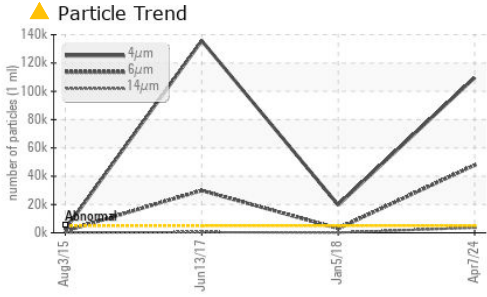





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	65.5	65.43	61.23

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

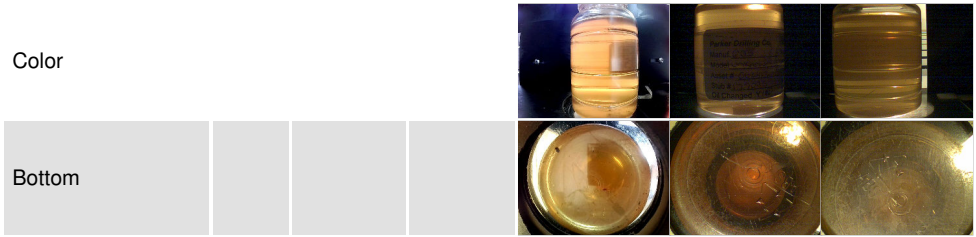

GRAPHS

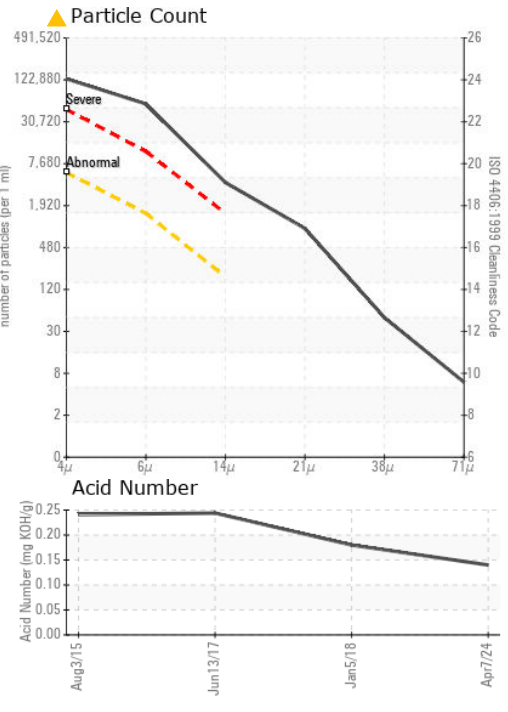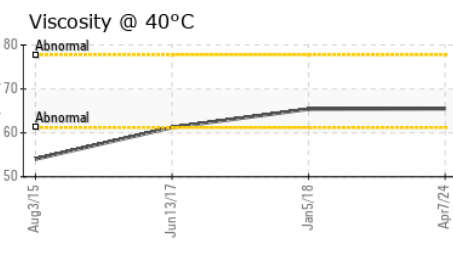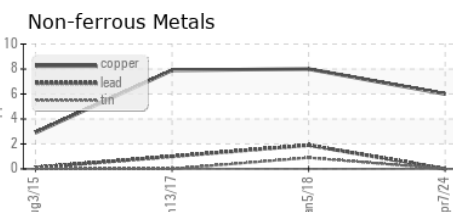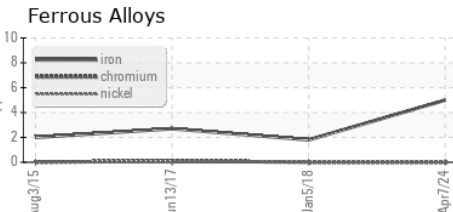

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RP0037437
Lab Number : 06151972
Unique Number : 10982050
Test Package : IND 2
Received : 17 Apr 2024
Tested : 18 Apr 2024
Diagnosed : 19 Apr 2024 - Don Baldrige

PARKER WELLBORE
 1110 UNIFAB RD
 NEW IBERIA, LA
 US 70560
 Contact: BRENT CARLINE
 brent.carline@parkerwellbore.com
 T: (337)364-3122
 F: (337)364-0232

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)