


OIL ANALYSIS REPORT

[**73428070**] KAESER AS 20T 2324132 (S/N 1014)

Component Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

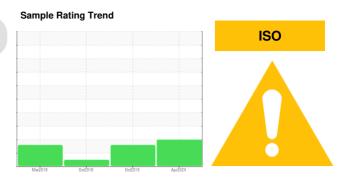

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA015017	KCP23912	KCP07333
Sample Date		Client Info		11 Apr 2024	07 Oct 2019	12 Oct 2018
Machine Age	hrs	Client Info		99999	99999	99999
Oil Age	hrs	Client Info		0	3000	2762
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	7	13	7
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	100	<1	0	7
Calcium	ppm	ASTM D5185m	0	0	<1	0
Phosphorus	ppm	ASTM D5185m	0	2	8	0
Zinc	ppm	ASTM D5185m	0	69	43	62
Sulfur	ppm	ASTM D5185m	23500	22377	17455	19968
CONTAMINANTS)	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	1	<1
Sodium	ppm	ASTM D5185m		0	<1	2
Potassium	ppm	ASTM D5185m	>20	1	0	<1
Water	%	ASTM D6304	>0.05	0.005	0.004	0.007
ppm Water	ppm	ASTM D6304	>500	52	42.2	70
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		28319	90906	1294
Particles >6µm		ASTM D7647	>1300	<u> </u>	<u>▲</u> 34541	274
Particles >14μm		ASTM D7647	>80	<u>2369</u>	<u>▲</u> 3675	17
Particles >21µm		ASTM D7647	>20	<u> </u>	<u></u> 1081	4
Particles >38μm		ASTM D7647	>4	48	▲ 57	0
Particles >71μm		ASTM D7647	>3	2	2	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>22/21/18</u>	<u>^</u> 22/19	15/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2



OIL ANALYSIS REPORT

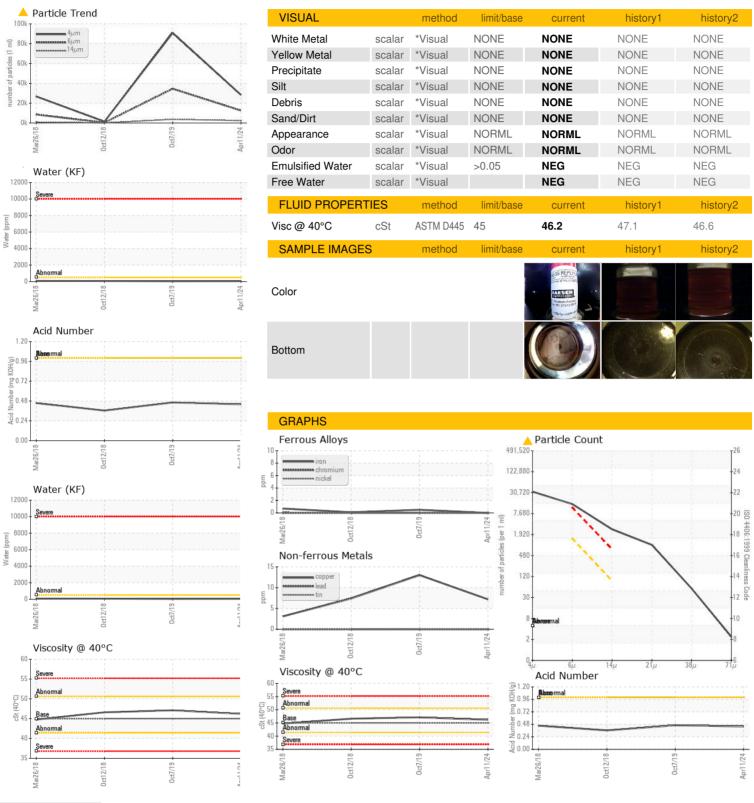





Certificate 12367

Laboratory Sample No.

Lab Number

: KCPA015017 : 06151986

Unique Number : 10982064

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 17 Apr 2024 **Tested** : 18 Apr 2024

Diagnosed

Test Package : IND 2 (Additional Tests: KF, PrtCount)

: 19 Apr 2024 - Don Baldridge

OLD DOMINION 1225 WASHINGTON BLVD MONTEBELLO, CA US 90640

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T:

F: