




# OIL ANALYSIS REPORT



Machine Id  
**CATERPILLAR 374 10555 (S/N TNX10032)**  
 Component  
**Left Final Drive**  
 Fluid  
**{not provided} (--- GAL)**

Sample Rating Trend

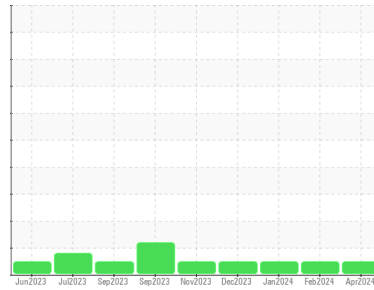

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0913234</b>	WC0888137	WC0888222
Sample Date	Client Info		<b>13 Apr 2024</b>	26 Feb 2024	30 Jan 2024
Machine Age	hrs	Client Info	<b>5200</b>	4395	3903
Oil Age	hrs	Client Info	<b>796</b>	492	670
Oil Changed		Client Info	<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >800	<b>14</b>	18	15
Chromium	ppm	ASTM D5185m >10	<b>1</b>	0	<1
Nickel	ppm	ASTM D5185m >5	<b>3</b>	2	2
Titanium	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >75	<b>1</b>	1	2
Lead	ppm	ASTM D5185m >10	<b>1</b>	<1	0
Copper	ppm	ASTM D5185m >75	<b>15</b>	13	17
Tin	ppm	ASTM D5185m >8	<b>2</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>176</b>	107	169
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>4</b>	12	4
Manganese	ppm	ASTM D5185m	<b>1</b>	0	0
Magnesium	ppm	ASTM D5185m	<b>16</b>	76	22
Calcium	ppm	ASTM D5185m	<b>347</b>	1500	462
Phosphorus	ppm	ASTM D5185m	<b>474</b>	772	618
Zinc	ppm	ASTM D5185m	<b>120</b>	565	154
Sulfur	ppm	ASTM D5185m	<b>2405</b>	3374	2935

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >400	<b>9</b>	9	5
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	1	0
Potassium	ppm	ASTM D5185m >20	<b>3</b>	5	3

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT



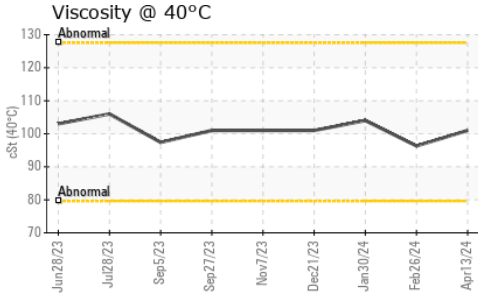


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	101	96.3	104

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image	no image
Bottom		no image	no image	no image

## GRAPHS

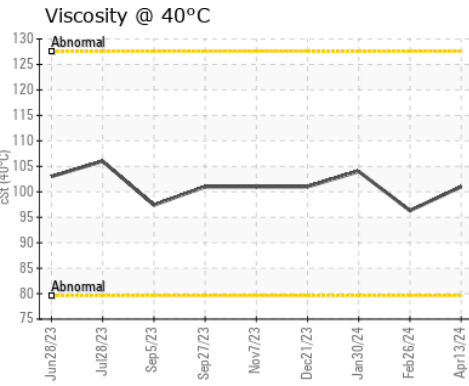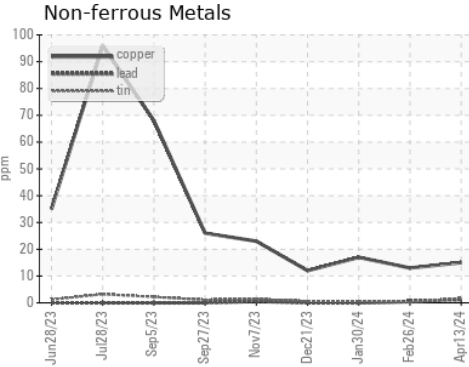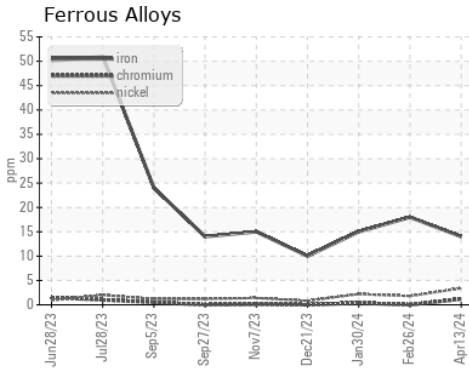

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0913234  
**Lab Number** : 06152396  
**Unique Number** : 10982474  
**Test Package** : CONST  
**Received** : 17 Apr 2024  
**Tested** : 18 Apr 2024  
**Diagnosed** : 18 Apr 2024 - Wes Davis

**TRADER CONSTRUCTION CO.**  
 PO DRAWER 1578  
 NEW BERN, NC  
 US 28563  
 Contact: MIKE WYATT  
 mwyatt@traderconstruction.com  
 T: (252)633-1399  
 F: (252)638-4871

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)