


OIL ANALYSIS REPORT

Sample Rating Trend



FUEL

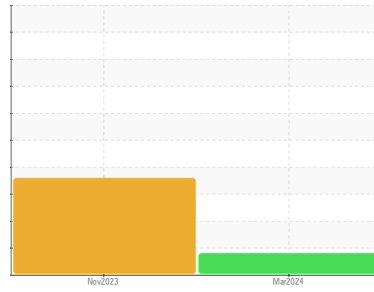

Machine Id

KENWORTH M-156

Component

Diesel Engine

Fluid

SHELL Rotella T5 15W-40 (7 GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

Light fuel dilution occurring. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|----------|
| Sample Number | Client Info | | | PE0003277 | PE0002390 | --- |
| Sample Date | Client Info | | | 15 Mar 2024 | 07 Nov 2023 | --- |
| Machine Age | hrs | Client Info | | 1880 | 0 | --- |
| Oil Age | hrs | Client Info | | 530 | 9626 | --- |
| Oil Changed | Client Info | | | Changed | Changed | --- |
| Sample Status | | | | MARGINAL | ABNORMAL | --- |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water | WC Method | >0.2 | | NEG | NEG | --- |
| Glycol | WC Method | | | NEG | NEG | --- |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >90 | 31 | 61 | --- |
| Chromium | ppm | ASTM D5185m | >20 | 2 | 2 | --- |
| Nickel | ppm | ASTM D5185m | >2 | 2 | <1 | --- |
| Titanium | ppm | ASTM D5185m | >2 | <1 | 0 | --- |
| Silver | ppm | ASTM D5185m | >2 | <1 | <1 | --- |
| Aluminum | ppm | ASTM D5185m | >20 | 13 | 16 | --- |
| Lead | ppm | ASTM D5185m | >40 | 3 | 2 | --- |
| Copper | ppm | ASTM D5185m | >330 | 9 | 40 | --- |
| Tin | ppm | ASTM D5185m | >15 | 2 | 3 | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | --- |
| Cadmium | ppm | ASTM D5185m | | 1 | 0 | --- |






| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | | 34 | 49 | --- |
| Barium | ppm | ASTM D5185m | | <1 | 3 | --- |
| Molybdenum | ppm | ASTM D5185m | | 82 | 13 | --- |
| Manganese | ppm | ASTM D5185m | | 2 | 6 | --- |
| Magnesium | ppm | ASTM D5185m | | 79 | 748 | --- |
| Calcium | ppm | ASTM D5185m | | 2149 | 1308 | --- |
| Phosphorus | ppm | ASTM D5185m | | 1093 | 719 | --- |
| Zinc | ppm | ASTM D5185m | | 1188 | 864 | --- |
| Sulfur | ppm | ASTM D5185m | | 4154 | 2833 | --- |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m | >25 | 12 | ▲ 45 | --- |
| Sodium | ppm | ASTM D5185m | | 4 | 5 | --- |
| Potassium | ppm | ASTM D5185m | >20 | 40 | 58 | --- |
| Fuel | % | ASTM D3524 | >3.0 | ▲ 2.2 | ▲ 2.2 | --- |

| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 | >6 | 0.3 | 0.2 | --- |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 10.5 | 10.2 | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 23.5 | 21.1 | --- |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 19.2 | 16.9 | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 10 | 4.8 | 6.2 | --- |





OIL ANALYSIS REPORT

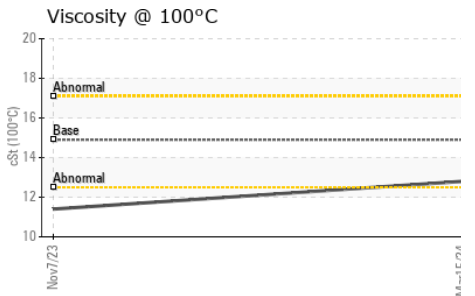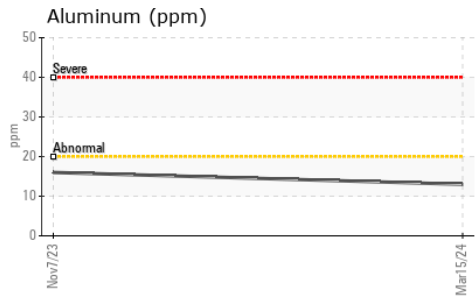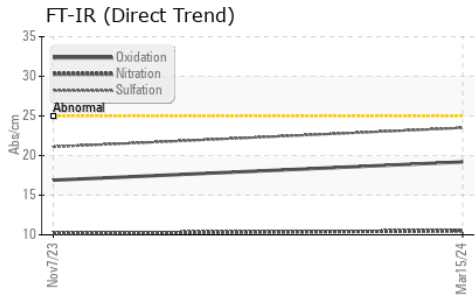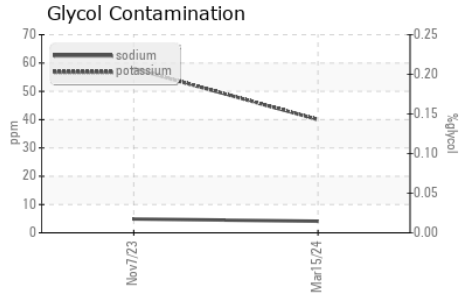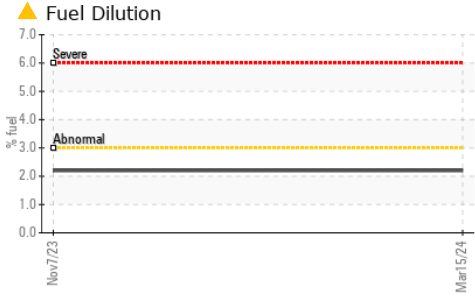

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- |
| Free Water | scalar | *Visual | | NEG | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 14.9 | 12.8 | ▲ 11.4 |

GRAPHS

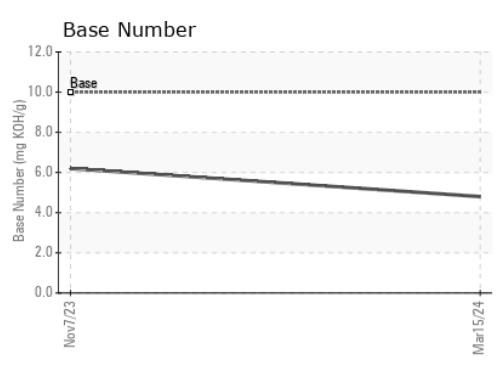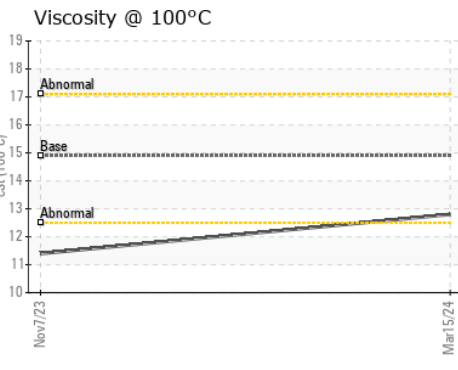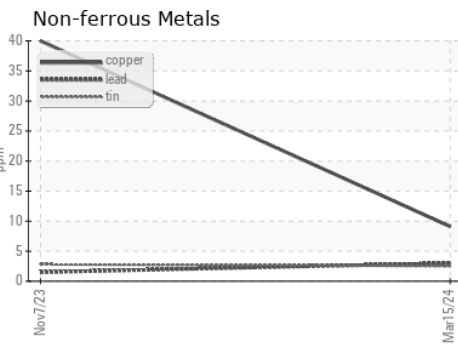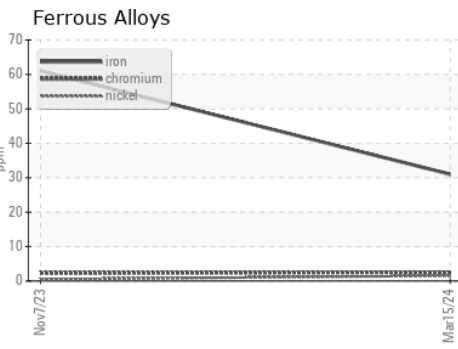

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0003277 **Received** : 17 Apr 2024
Lab Number : **06152516** **Tested** : 22 Apr 2024
Unique Number : 10982594 **Diagnosed** : 22 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: FT-IR, ICP, KV100, PercentFuel, SCREEN, TBN)

PetroCard - Aberdeen
 110 Commerce St
 Aberdeen, WA
 US 98520
 Contact: Sean McNealley
 smcnealley@petrocard.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)