




# OIL ANALYSIS REPORT

Sample Rating Trend

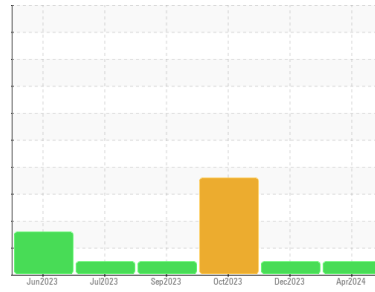

**NORMAL**



Machine Id  
**GARDNER DENVER 1300 CPR 003**  
 Component  
**Compressor**  
 Fluid  
**GARDNER DENVER AEON 9000 SP (30 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PH0002822</b>	PH0001954	PH0001953
Sample Date	Client Info		<b>04 Apr 2024</b>	07 Dec 2023	29 Oct 2023
Machine Age	hrs	Client Info	<b>54465</b>	0	51291
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>50	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m		<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	0
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	<b>0</b>	0	<1
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	1
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	0	<b>0</b>	0	<1
Calcium	ppm	ASTM D5185m	0	<b>3</b>	1	<1
Phosphorus	ppm	ASTM D5185m	800	<b>872</b>	802	799
Zinc	ppm	ASTM D5185m	0	<b>0</b>	0	1
Sulfur	ppm	ASTM D5185m	0	<b>23</b>	0	0

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	0
Sodium	ppm	ASTM D5185m		<b>1</b>	2	<1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0

## FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	<b>1547</b>	2423	▲ 51786
Particles >6µm	ASTM D7647	>2500	<b>575</b>	607	▲ 18796
Particles >14µm	ASTM D7647	>320	<b>87</b>	59	▲ 1038
Particles >21µm	ASTM D7647	>80	<b>33</b>	19	▲ 268
Particles >38µm	ASTM D7647	>20	<b>1</b>	1	13
Particles >71µm	ASTM D7647	>4	<b>0</b>	0	1
Oil Cleanliness	ISO 4406 (c)	>20/18/15	<b>18/16/14</b>	18/16/13	▲ 23/21/17

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	.170	<b>0.35</b>	0.40	0.46




# OIL ANALYSIS REPORT

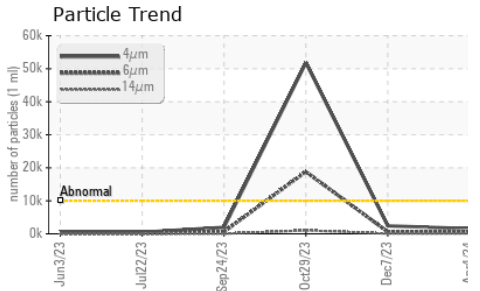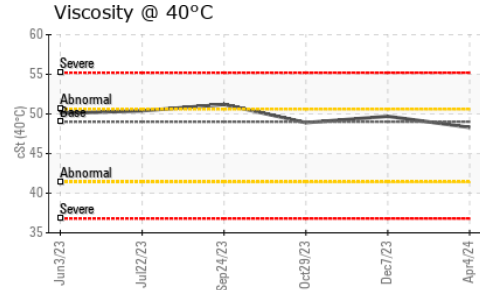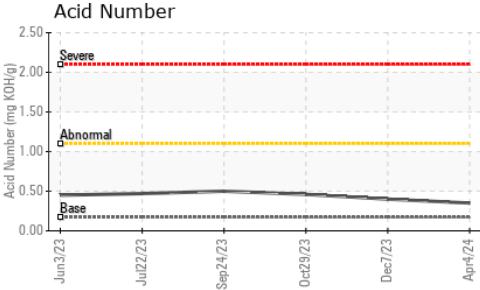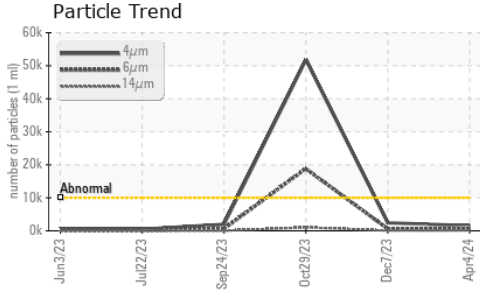





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	0.2%
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	49.01	<b>48.3</b>	49.7	48.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

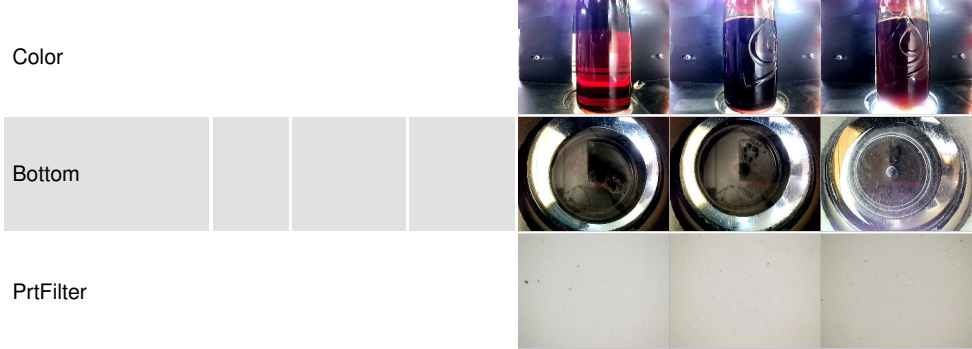

## GRAPHS

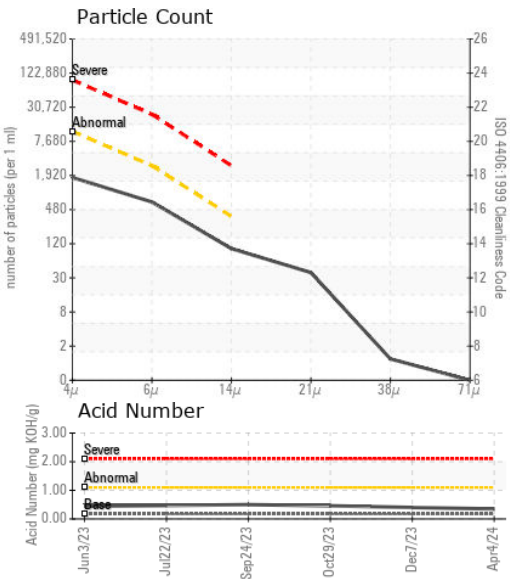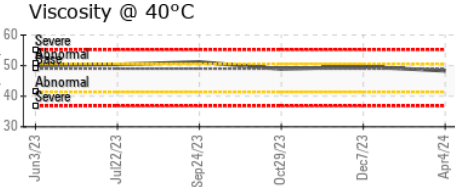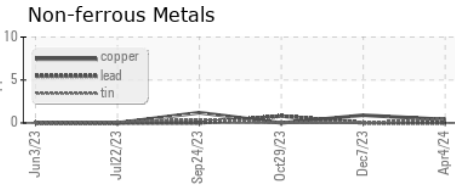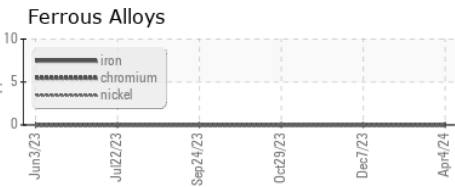

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PH0002822      **Received** : 17 Apr 2024  
**Lab Number** : **06152584**      **Tested** : 22 Apr 2024  
**Unique Number** : 10982662      **Diagnosed** : 22 Apr 2024 - Doug Bogart  
**Test Package** : PLANT

**APCOM**  
 127 SOUTHEAST PARKWAY  
 FRANKLIN, TN  
 US 37064  
 Contact: R Filipovic  
 rfilipovic@apcom.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)