

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id

KAESER SM 10 5408935 (S/N 2015)

Component Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA016397	KCP44523	KCP34649
Sample Date		Client Info		27 Mar 2024	06 Apr 2022	23 Mar 2021
Machine Age	hrs	Client Info		27855	13924	4949
Oil Age	hrs	Client Info		0	3000	0
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	2	<1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m		9	16	8
Tin	ppm	ASTM D5185m	>10	<1	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	ppm		11 11 /1			-
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	9
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	90	6	<1	40
Calcium	ppm	ASTM D5185m	2	2	0	0
Phosphorus	ppm	ASTM D5185m		3	4	6
Zinc	ppm	ASTM D5185m		47	3	53
Sulfur	ppm	ASTM D5185m		21056	16336	16146
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	0
Sodium	ppm	ASTM D5185m			0	12
oodium	10 10	AOTIM DOTOSIII		4	0	16
Potassium	ppm	ASTM D5185m	>20	4 2	<1	2
Potassium	ppm	ASTM D5185m		2	<1	2
Potassium Water	ppm % ppm	ASTM D5185m ASTM D6304	>0.05	2 0.010	<1 0.006	2 0.019
Potassium Water ppm Water	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304	>0.05 >500	2 0.010 110	<1 0.006 69.7	2 0.019 195.7
Potassium Water ppm Water FLUID CLEANLIN	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 method	>0.05 >500 limit/base	2 0.010 110 current	<1 0.006 69.7 history1	2 0.019 195.7 history2
Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>0.05 >500 limit/base	2 0.010 110 current 167510	<1 0.006 69.7 history1	2 0.019 195.7 history2 11910
Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300	2 0.010 110 current 167510 ▲ 94446	<1 0.006 69.7 history1 	2 0.019 195.7 history2 11910 ▲ 3865
Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80	2 0.010 110 current 167510 ▲ 94446 ▲ 11618	<1 0.006 69.7 history1 	2 0.019 195.7 history2 11910 ▲ 3865 ▲ 496
Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20	2 0.010 110 current 167510 ▲ 94446 11618 ▲ 3043	<1 0.006 69.7 history1 	2 0.019 195.7 history2 11910 ▲ 3865 ▲ 496 ▲ 177
Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm % ppm	ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4	2 0.010 110 current 167510 ▲ 94446 11618 ▲ 3043 ▲ 100	<1 0.006 69.7 history1 	2 0.019 195.7 history2 11910 ▲ 3865 ▲ 496 ▲ 177 ▲ 14
Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >38µm Particles >71µm	ppm % ppm ESS	ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4 >3	2 0.010 110 current 167510 ▲ 94446 ▲ 11618 ▲ 3043 ▲ 100 ▲ 5	<1 0.006 69.7 history1 	2 0.019 195.7 history2 11910 3865 496 496 177 14

Report Id: OLDHOU [WUSCAR] 06152590 (Generated: 04/23/2024 09:33:16) Rev: 1


Contact/Location: DAVID MORALES - OLDHOU




OIL ANALYSIS REPORT

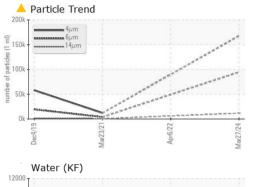



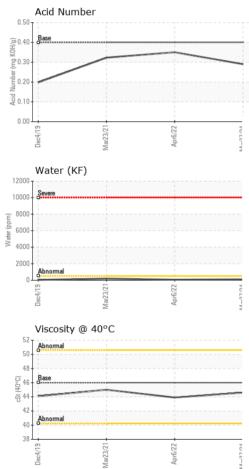

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	🔺 MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.6	43.9	45.0
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color				•		
Bottom						

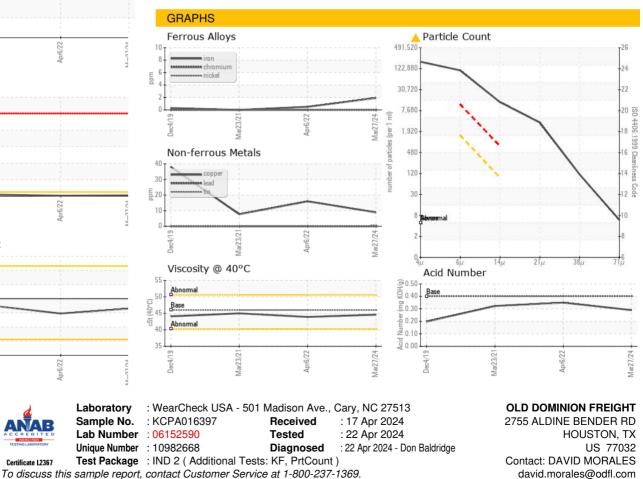

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: OLDHOU [WUSCAR] 06152590 (Generated: 04/23/2024 09:33:16) Rev: 1

Certificate 12367

Contact/Location: DAVID MORALES - OLDHOU

T:

F: