


OIL ANALYSIS REPORT

Sample Rating Trend

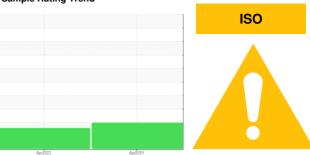

Machine Id

KAESER 7458648

Component Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Apr2023	Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history?
	MATION		iimiybase		,	history2
Sample Number		Client Info		KCPA016708	KCP53456	
Sample Date		Client Info		15 Apr 2024	04 Apr 2023	
Machine Age	hrs	Client Info		1483	841	
Oil Age	hrs	Client Info		600	300	
Oil Changed		Client Info		Not Changd	Changed	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	<1	0	
Lead	ppm	ASTM D5185m	>10	0	<1	
Copper	ppm	ASTM D5185m	>50	6	<1	
Tin	ppm	ASTM D5185m	>10	<1	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	17	22	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		<1	0	
Magnesium	ppm	ASTM D5185m	100	60	78	
Calcium	ppm	ASTM D5185m	0	5	3	
Phosphorus	ppm	ASTM D5185m	0	3	11	
Zinc	ppm	ASTM D5185m	0	0	3	
Sulfur	ppm	ASTM D5185m	23500	22283	19600	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	2	
Sodium	ppm	ASTM D5185m		13	5	
Potassium	ppm	ASTM D5185m	>20	11	10	
Water	%	ASTM D6304	>0.05	0.042	0.025	
ppm Water	ppm	ASTM D6304	>500	422	254.6	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		19747	12660	
Particles >6µm		ASTM D7647	>1300	6705	4 061	
Particles >14µm		ASTM D7647	>80	▲ 508	<u>^</u> 219	
Particles >21µm		ASTM D7647	>20	<u> </u>	4 9	
Particles >38µm		ASTM D7647	>4	<u>^</u> 6	1	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	21/20/16	<u>^</u> 21/19/15	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Asid Number (AN)	VOLV-	ACTM DODAE	1.0	0.06	0.00	

Acid Number (AN)


mg KOH/g ASTM D8045 1.0

0.32

0.36



OIL ANALYSIS REPORT

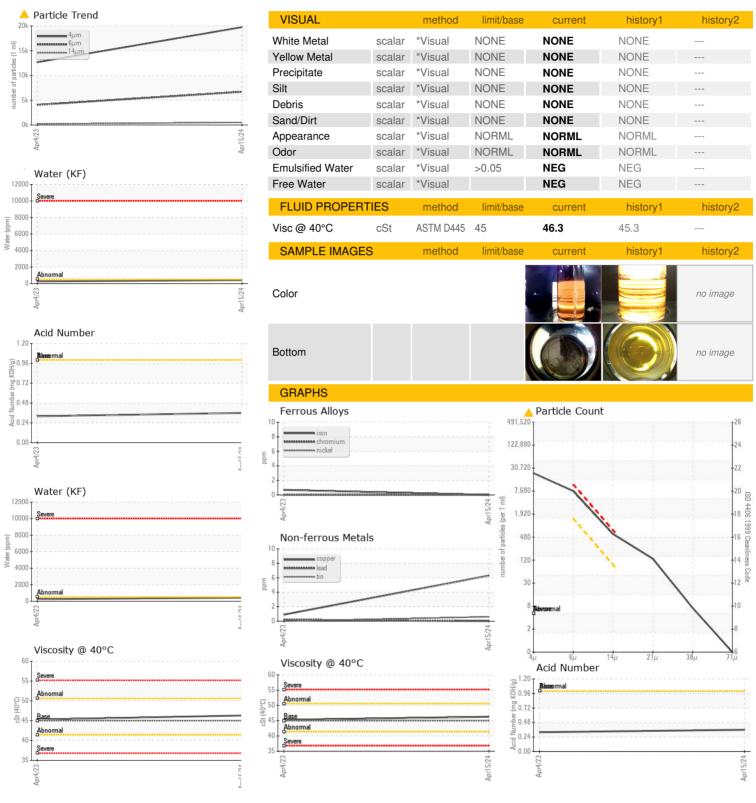



Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA016708

Lab Number : 06152591 Unique Number: 10982669

Received : 17 Apr 2024 **Tested** : 22 Apr 2024 Diagnosed : 22 Apr 2024 - Don Baldridge

Test Package : IND 2 (Additional Tests: KF, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369. st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. **BREWER MONUMENT CO** 111 S WEST ST

PERRYVILLE, MO US 63775 Contact: TIM B.

timb2629@yahoo.com T:

Contact/Location: TIM B. - BREPERMO

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: