




OIL ANALYSIS REPORT

Sample Rating Trend

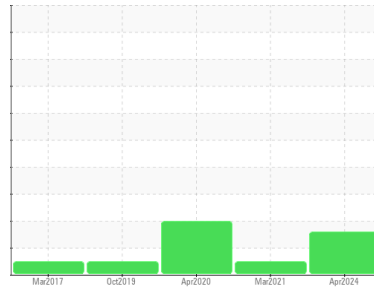

Machine Id
KAESER AS 20 3108195 (S/N 1412)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) M-460 (--- QTS)

DIAGNOSIS

Recommendation
 No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is a high amount of particulates present in the oil.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KCPA016063	KCP30675	KCP26492
Sample Date	Client Info		08 Apr 2024	09 Mar 2021	23 Apr 2020
Machine Age	hrs	Client Info	42082	33719	32090
Oil Age	hrs	Client Info	2078	1578	1147
Oil Changed	Client Info		Not Chngd	Changed	Not Chngd
Sample Status			ABNORMAL	NORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	0	<1	<1
Chromium	ppm	ASTM D5185m >10	0	0	0
Nickel	ppm	ASTM D5185m >3	0	0	<1
Titanium	ppm	ASTM D5185m >3	0	0	0
Silver	ppm	ASTM D5185m >2	0	<1	0
Aluminum	ppm	ASTM D5185m >10	<1	0	<1
Lead	ppm	ASTM D5185m >10	0	1	2
Copper	ppm	ASTM D5185m >50	4	3	4
Tin	ppm	ASTM D5185m >10	<1	0	0
Antimony	ppm	ASTM D5185m	---	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	1	0
Barium	ppm	ASTM D5185m 90	18	12	59
Molybdenum	ppm	ASTM D5185m 0	0	0	<1
Manganese	ppm	ASTM D5185m	<1	<1	0
Magnesium	ppm	ASTM D5185m 100	71	72	86
Calcium	ppm	ASTM D5185m 0	4	3	3
Phosphorus	ppm	ASTM D5185m 0	2	1	3
Zinc	ppm	ASTM D5185m 0	0	0	4
Sulfur	ppm	ASTM D5185m 23500	22458	16831	19203

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<1	<1	1
Sodium	ppm	ASTM D5185m	18	26	19
Potassium	ppm	ASTM D5185m >20	5	4	3
Water	%	ASTM D6304 >0.05	0.014	0.017	0.031
ppm Water	ppm	ASTM D6304 >500	150	179.0	315.1






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		15477	1884	12994
Particles >6µm	ASTM D7647 >1300		▲ 4550	392	▲ 2701
Particles >14µm	ASTM D7647 >80		▲ 238	23	▲ 151
Particles >21µm	ASTM D7647 >20		▲ 50	5	▲ 47
Particles >38µm	ASTM D7647 >4		2	0	▲ 4
Particles >71µm	ASTM D7647 >3		0	0	▲ 0
Oil Cleanliness	ISO 4406 (c) >17/13		▲ 19/15	16/12	▲ 19/14

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	0.35	0.345	0.359


OIL ANALYSIS REPORT

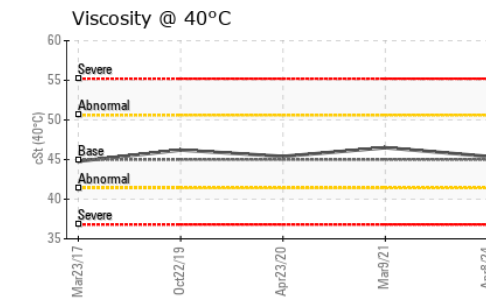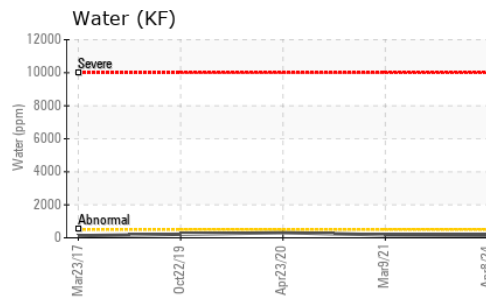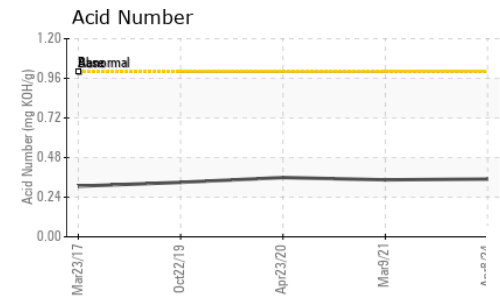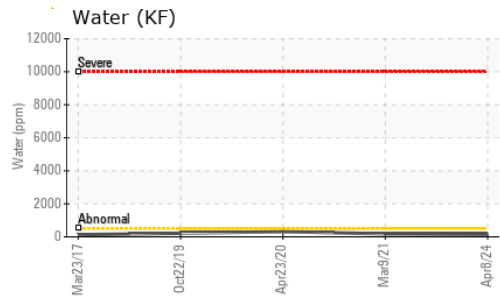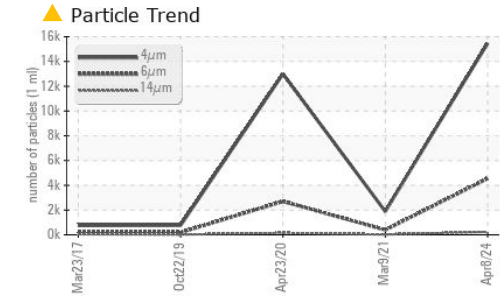





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	45.4	46.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

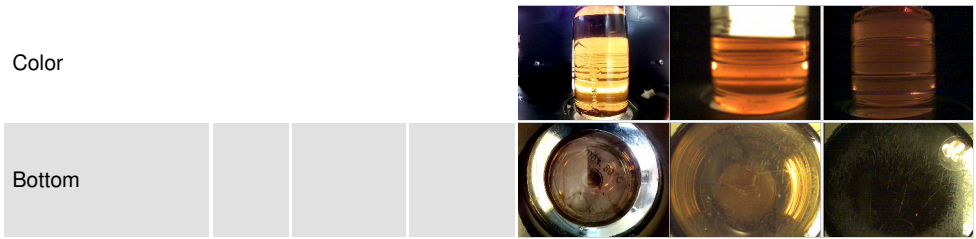

GRAPHS

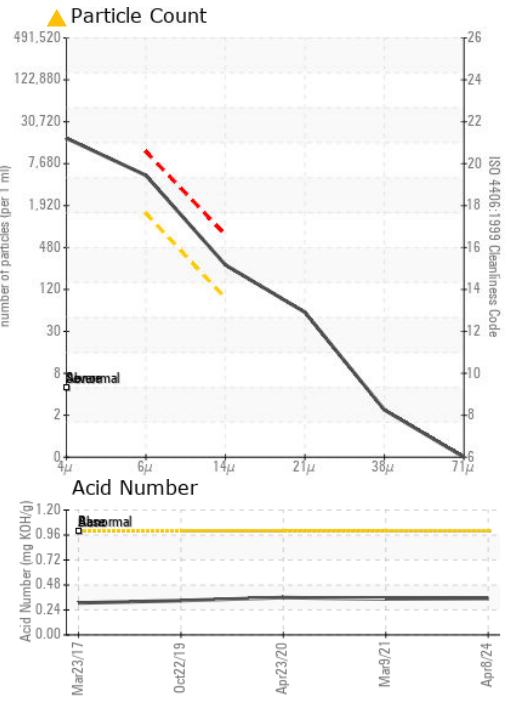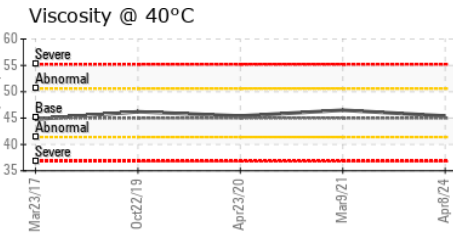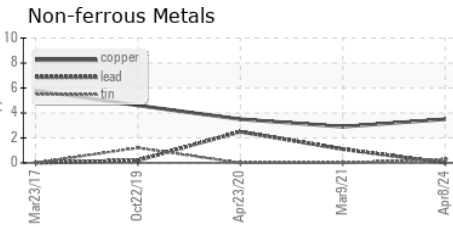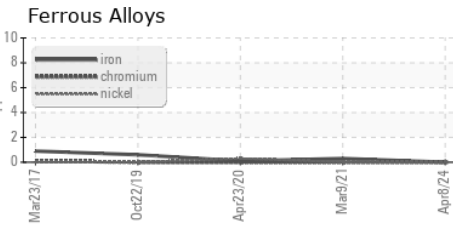

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA016063
Lab Number : 06152592
Unique Number : 10982670
Test Package : IND 2 (Additional Tests: KF, PrtCount)
Received : 17 Apr 2024
Tested : 22 Apr 2024
Diagnosed : 22 Apr 2024 - Don Baldrige

PMS MANUFACTURED PRODUCTS INC
 10 SADLER ST EXT
 GLOUCESTER, MA
 US 01930
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)