

OIL ANALYSIS REPORT

Machine Id KAESER AIRCENTER SK 20 5578569 (S/N 1805) Compressor

Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

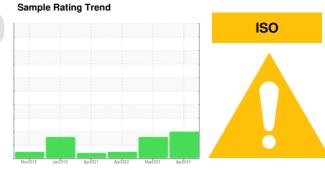


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA016641	KCPA001205	KCP44383
Sample Date		Client Info		12 Apr 2024	10 Mar 2023	09 Apr 2022
Machine Age	hrs	Client Info		30993	26200	22713
Oil Age	hrs	Client Info		4700	0	3702
Oil Changed		Client Info		Changed	N/A	Changed
Sample Status				ABNORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	<1	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	<1	<1
Aluminum	ppm	ASTM D5185m	>10	0	<1	1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	8	2	3
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	<1	48	7
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	1	0
Magnesium	ppm	ASTM D5185m	100	12	89	67
Calcium	ppm	ASTM D5185m	0	2	1	0
Phosphorus	ppm	ASTM D5185m	0	1	2	2
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	23500	22870	22677	16178
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		4	3	17
D · · ·						3
Potassium	ppm	ASTM D5185m	>20	2	6	0
Potassium Water	ppm %	ASTM D5185m ASTM D6304		2 0.007	6 0.016	0.025
Water			>0.05			
Water	% ppm	ASTM D6304	>0.05	0.007	0.016	0.025
Water ppm Water FLUID CLEANLIN	% ppm	ASTM D6304 ASTM D6304	>0.05 >500	0.007 78	0.016 162.1	0.025 259.6
Water ppm Water FLUID CLEANLIN Particles >4µm	% ppm	ASTM D6304 ASTM D6304 method	>0.05 >500 limit/base	0.007 78 current	0.016 162.1 history1	0.025 259.6 history2
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	% ppm	ASTM D6304 ASTM D6304 method ASTM D7647	>0.05 >500 limit/base	0.007 78 current 9718	0.016 162.1 history1 3727	0.025 259.6 history2 1884
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	% ppm	ASTM D6304 ASTM D6304 method ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80	0.007 78 current 9718 ▲ 3200	0.016 162.1 history1 3727 1452	0.025 259.6 history2 1884 272
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	% ppm	ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80	0.007 78 current 9718 ▲ 3200 ▲ 264	0.016 162.1 history1 3727 1452 116	0.025 259.6 history2 1884 272 16
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >28µm	% ppm	ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4	0.007 78 current 9718 ▲ 3200 ▲ 264 ▲ 72	0.016 162.1 3727 1452 116 31	0.025 259.6 history2 1884 272 16 2
Water ppm Water	% ppm	ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4	0.007 78 current 9718 ▲ 3200 ▲ 264 ▲ 72 ▲ 7	0.016 162.1 3727 1452 116 31 1	0.025 259.6 history2 1884 272 16 2 0
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	% ppm ESS	ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>0.05 >500 limit/base >1300 >80 >20 >4 >3	0.007 78 current 9718 ▲ 3200 ▲ 264 ▲ 72 ▲ 7 1	0.016 162.1 3727 1452 116 31 1 0	0.025 259.6 history2 1884 272 16 2 0 0 0


Report Id: ACCMOR [WUSCAR] 06152596 (Generated: 04/23/2024 09:39:25) Rev: 1


0.39Contact/Location: CHRIS MELTON - ACCMOR





OIL ANALYSIS REPORT

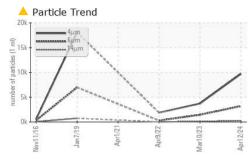










 *Visual 	NONE NONE NONE NONE NONE NORML	NONE NONE NONE NONE NONE NORML NORML	NONE NONE NONE LIGHT NONE NORML NORML	NONE NONE NONE NONE NONE NORML
*Visual *Visual *Visual *Visual *Visual *Visual	NONE NONE NONE NORML NORML	NONE NONE NONE NONE NORML	NONE NONE LIGHT NONE NORML	NONE NONE NONE NONE NORML
*Visual *Visual *Visual *Visual *Visual	NONE NONE NORML NORML	NONE NONE NONE NORML	NONE LIGHT NONE NORML	NONE NONE NONE NORML
*Visual *Visual *Visual *Visual	NONE NONE NORML NORML	NONE NONE NORML	LIGHT NONE NORML	NONE NONE NORML
*Visual *Visual *Visual	NONE NORML NORML	NONE NORML	NONE	NONE
*Visual *Visual	NORML	NORML	NORML	NORML
*Visual	NORML			
		NORML	NORML	NORML
*Visual	0.05			
viouui	>0.05	NEG	NEG	NEG
*Visual		NEG	NEG	NEG
method	limit/base	current	history1	history2
ASTM D445	45	50.5	48.7	49.7
method	limit/base	current	history1	history2
			method limit/base current	method limit/base current history1

Bottom

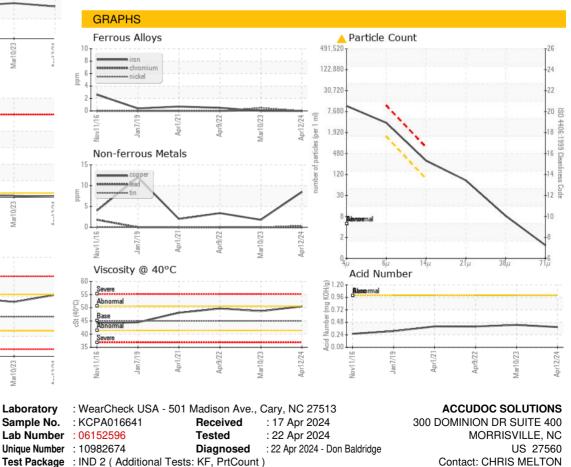

Certificate 12367 Test Package : IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: ACCMOR [WUSCAR] 06152596 (Generated: 04/23/2024 09:39:25) Rev: 1

Contact/Location: CHRIS MELTON - ACCMOR

Page 2 of 2

T:

F:

chris.melton@accudoc.com