

### **OIL ANALYSIS REPORT**

Sample Rating Trend



Machine Id

# KAESER ASD 40 9145817 (S/N 1651)

Component Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.


#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA016922		
Sample Date		Client Info		15 Apr 2024		
Machine Age	hrs	Client Info		5883		
Oil Age	hrs	Client Info		3982		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	3		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	5		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m		1		
Tin	ppm	ASTM D5185m	>10	۔ <1		
Vanadium	ppm	ASTM D5185m	-	0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	90	0		
Calcium	ppm	ASTM D5185m	2	2		
Phosphorus	ppm	ASTM D5185m		43		
Zinc	ppm	ASTM D5185m		6		
Sulfur	ppm	ASTM D5185m		784		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1		
Sodium	ppm	ASTM D5185m		3		
Potassium	ppm	ASTM D5185m	>20	4		
Water	%	ASTM D6304	>0.05	0.003		
ppm Water	ppm	ASTM D6304	>500	30		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		17122		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	<u> </u>		
Particles >21µm		ASTM D7647	>20	<u> </u>		
Particles >38µm		ASTM D7647	>4	<u> </u>		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 21/19/16		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.31		



## **OIL ANALYSIS REPORT**

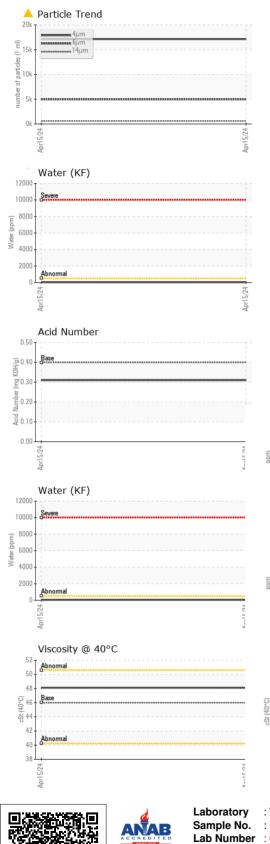

White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt Appearance Odor Emulsified Water Free Water Fluid PROPERT Visc @ 40°C SAMPLE IMAGES Color	cSt	*Visual *Visual *Visual *Visual *Visual *Visual *Visual *Visual *Visual <b>method</b> ASTM D445	NONE NONE NONE NONE NORML NORML >0.05 Imit/base 46 Imit/base	NONE NONE NONE NONE NORML NORML NORML NEG NEG NEG Current 48.1	     history1 history1	      history2  history2
Precipitate Silt Debris Sand/Dirt Appearance Odor Emulsified Water Free Water FLUID PROPERT Visc @ 40°C SAMPLE IMAGES Color	scalar scalar scalar scalar scalar scalar scalar scalar scalar	*Visual *Visual *Visual *Visual *Visual *Visual *Visual *Visual *Visual Method ASTM D445	NONE NONE NONE NONE NORML NORML >0.05 Imit/base	NONE NONE NONE NORML NORML NEG NEG Current 48.1	    history1	     history2
Silt Debris Sand/Dirt Appearance Odor Emulsified Water Free Water FLUID PROPERT Visc @ 40°C SAMPLE IMAGES Color	scalar scalar scalar scalar scalar scalar scalar	*Visual *Visual *Visual *Visual *Visual *Visual *Visual method ASTM D445	NONE NONE NORML NORML >0.05 limit/base	NONE NONE NORML NORML NEG NEG current 48.1	    history1	    history2
Debris Sand/Dirt Appearance Odor Emulsified Water Free Water FLUID PROPERT Visc @ 40°C SAMPLE IMAGES Color	scalar scalar scalar scalar scalar scalar <b>TES</b>	*Visual *Visual *Visual *Visual *Visual <b>*</b> Visual <b>method</b> ASTM D445	NONE NORML NORML >0.05 limit/base	NONE NORML NORML NEG NEG current 48.1	   history1	    history2
Sand/Dirt Appearance Odor Emulsified Water Free Water FLUID PROPERT Visc @ 40°C SAMPLE IMAGES Color	scalar scalar scalar scalar scalar <b>IES</b> cSt	*Visual *Visual *Visual *Visual *Visual method ASTM D445	NONE NORML >0.05 limit/base	NONE NORML NORML NEG NEG current 48.1	   history1	   history2
Appearance Odor Emulsified Water Free Water FLUID PROPERT Visc @ 40°C SAMPLE IMAGES Color	scalar scalar scalar scalar IES cSt	*Visual *Visual *Visual *Visual method ASTM D445	NORML NORML >0.05 limit/base 46	NORML NORML NEG NEG current 48.1	   history1	   history2
Emulsified Water Free Water FLUID PROPERT Visc @ 40°C SAMPLE IMAGES Color	scalar scalar scalar IES cSt	*Visual *Visual *Visual method ASTM D445	NORML >0.05 limit/base 46	NORML NEG NEG current 48.1	  history1	  history2
Emulsified Water Free Water FLUID PROPERT Visc @ 40°C SAMPLE IMAGES Color	scalar scalar TES cSt	*Visual *Visual method ASTM D445	>0.05 limit/base 46	NEG NEG current 48.1	 history1	 history2
Free Water FLUID PROPERT Visc @ 40°C SAMPLE IMAGES Color	scalar TES cSt	*Visual method ASTM D445	limit/base 46	NEG current 48.1	 history1 	 history2 
FLUID PROPERT Visc @ 40°C SAMPLE IMAGES Color	T <mark>IES</mark> cSt	method ASTM D445	46	current 48.1		history2
Visc @ 40°C SAMPLE IMAGES Color	cSt	ASTM D445	46	48.1		
SAMPLE IMAGES			-	-	history1	history2
Color	5	method	limit/base	current	history1	history2
					no image	no image
Bottom				a the		
Bottom						
					no image	no image
GRAPHS						
Ferrous Alloys				Particle Count		
			491,520	1		T <sup>26</sup>
C - management - chromium			122,880	-		-24
			30.720			-22
2			30,720			T24
			7,680			-20
15/24			ul 1 1920			+18
			Apr les (pe			
	S		-ite 480	<b>``</b>		-11 -18 -16 -14
copper			ja 120	-	1	-12
E 6+ the time of t					/	-12
đ 4.			30			
2				Bioresemal		
0				I		
pr15/2			pr15/2			Y
			< 0	4.00	14µ 21µ	38µ 71µ
VISCOSITY @ 40°C			0.50	Acid Number		
Abnormal			(B) 1.50	Base		
D Base			Ĕ 0.30			
st) 45 -						
			N p 0.10	-		
35				4		
pr15/2			pr15/2	pr15/2		
Ar			Ar	Ap		
: WearCheck USA - 50	1 Madiso	n Ave., Cary	, NC 27513	SUF	ERIOR PLAST	
. : KCPA016922	Recei	ved : 17	7 Apr 2024			' HOME ROA
				Deldaldar		HAMLET, N
	•		Apr 2024 - Don	Baidridge	Cont	US 2834 act: HENRY
			9.			
	Ferrous Alloys Ferrous Alloys iron iron iron iron nickel Non-ferrous Metal Viscosity @ 40°C Viscosity @ 40°C State Abnomal Base Abnomal Base Abnomal State Ferrous Metal Copper iron iro	Ferrous Alloys Ferrous Alloys iron iron iron nickel Non-ferrous Metals Non-ferrous Metals Viscosity @ 40°C Viscosity @ 40°C State Abnomal Base Abnomal Abnomal Base Abnomal	Ferrous Alloys	Ferrous Alloys Ferrous Alloys	Ferrous Alloys Particle Count Particle Count	Ferrous Alloys Particle Count Particle Count

Report Id: SUPHAMKC [WUSCAR] 06152602 (Generated: 04/23/2024 09:39:35) Rev: 1

Contact/Location: HENRY C. - SUPHAMKC