


OIL ANALYSIS REPORT

Sample Rating Trend

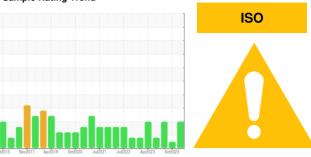

Machine Id

NEFF PRESS 1677

Component Hydraulic System

MOBIL DTE 25 (5 GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue.

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		ct2015 Nov2	017 Apr2019 Oct2020	Jul2021 Jul2022 Apr2023	Oct2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		ST46579	ST44434	ST44680
Sample Date		Client Info		10 Apr 2024	13 Oct 2023	27 Jul 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>30	6	7	6
Chromium	ppm	ASTM D5185m	>2	0	<1	0
Nickel	ppm	ASTM D5185m	>2	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>2	<1	2	<1
Lead	ppm	ASTM D5185m	>10	<1	<1	<1
Copper	ppm	ASTM D5185m	>25	68	81	76
Tin	ppm	ASTM D5185m	>20	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		4	5	5
Calcium	ppm	ASTM D5185m		92	97	99
Phosphorus	ppm	ASTM D5185m		673	701	611
Zinc	ppm	ASTM D5185m		849	869	830
Sulfur	ppm	ASTM D5185m		4889	4726	4716
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	1	1	<1
Sodium	ppm	ASTM D5185m		5	2	3
Potassium	ppm	ASTM D5185m	>20	2	1	0
Water	%	ASTM D6304	>0.05	0.019	0.011	0.015
ppm Water	ppm	ASTM D6304	>500	191	119	151.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>640	1986	528	△ 2057
Particles >6µm		ASTM D7647	>160	^ 366	138	320
Particles >14μm		ASTM D7647	>20	47	18	▲ 72
Particles >21µm		ASTM D7647	>4	<u> </u>	4	△ 31
Particles >38µm		ASTM D7647	>3	1	0	4
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>16/14/11	18/16/13	16/14/11	▲ 18/15/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.82	0.70	0.75





OIL ANALYSIS REPORT

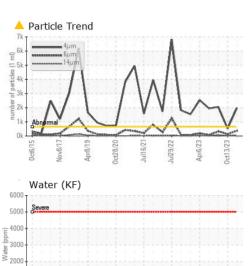


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	44.2	45.7	45.9	45.8
SAMPLE IMAGES		method	limit/base	current	history1	history2







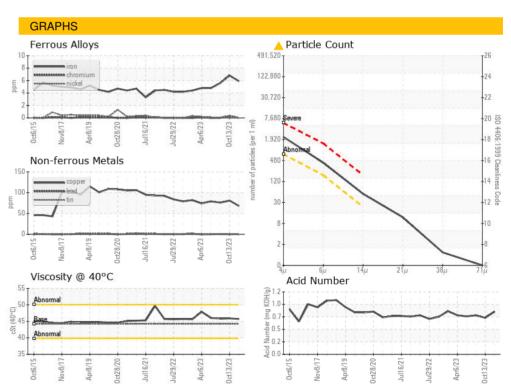





Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : ST46579

Lab Number : 06152626 Unique Number : 10982704

Color

Bottom

Received : 17 Apr 2024 **Tested**

: 22 Apr 2024 Diagnosed : 22 Apr 2024 - Don Baldridge

Test Package : IND 2 (Additional Tests: KF)

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. **LARSON TOOL & STAMPING CO**

90 OLIVE ST ATTLEBORO, MA US 02703

Contact: GARY BRUNE gbrune@larsontool.com T:

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F:

Contact/Location: GARY BRUNE - LARATT