




# OIL ANALYSIS REPORT

## Sample Rating Trend

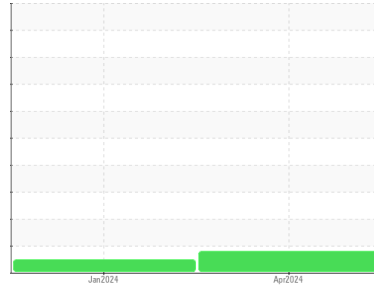

**WEAR**



Machine Id  
**FREIGHTLINER 1221**  
 Component  
**Diesel Engine**  
 Fluid  
 **DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

### DIAGNOSIS

#### ▲ Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### ▲ Wear

The lead level is abnormal. All other component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0917289</b>	WC0893862	---
Sample Date	Client Info		<b>01 Apr 2024</b>	22 Jan 2024	---
Machine Age	mls	Client Info	<b>262471</b>	0	---
Oil Age	mls	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>ABNORMAL</b>	NORMAL	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>80	<b>44</b>	27	---
Chromium	ppm	ASTM D5185m	>5	<b>3</b>	2	---
Nickel	ppm	ASTM D5185m	>2	<b>1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>30	<b>1</b>	<1	---
Lead	ppm	ASTM D5185m	>30	<b>▲ 31</b>	9	---
Copper	ppm	ASTM D5185m	>150	<b>2</b>	<1	---
Tin	ppm	ASTM D5185m	>5	<b>2</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>1</b>	0	---

### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	250	<b>0</b>	2	---
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	100	<b>62</b>	64	---
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	---
Magnesium	ppm	ASTM D5185m	450	<b>941</b>	986	---
Calcium	ppm	ASTM D5185m	3000	<b>1073</b>	1079	---
Phosphorus	ppm	ASTM D5185m	1150	<b>1087</b>	1097	---
Zinc	ppm	ASTM D5185m	1350	<b>1229</b>	1292	---
Sulfur	ppm	ASTM D5185m	4250	<b>3291</b>	3002	---

### CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>20	<b>4</b>	3	---
Sodium	ppm	ASTM D5185m	>158	<b>15</b>	24	---
Potassium	ppm	ASTM D5185m	>20	<b>7</b>	7	---

### INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.9</b>	0.6	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.1</b>	10.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>25.8</b>	22.3	---


### FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>25.6</b>	20.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>5.2</b>	7.1	---



# OIL ANALYSIS REPORT

### ▲ Non-ferrous Metals

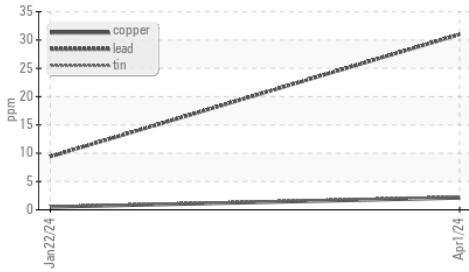


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.4	13.5

### GRAPHS


### FT-IR (Direct Trend)

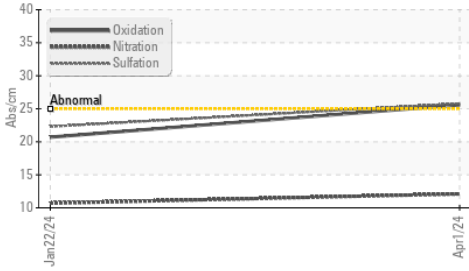


### Base Number



### Iron (ppm)

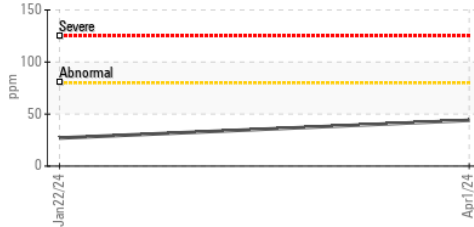


### ▲ Lead (ppm)

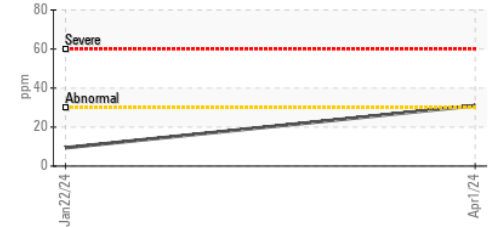


### Aluminum (ppm)




### Chromium (ppm)

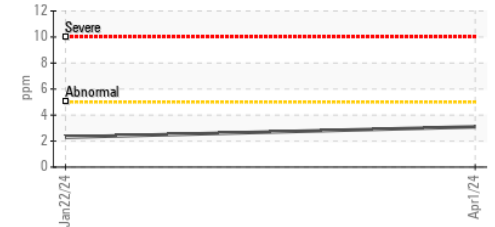


### Viscosity @ 100°C

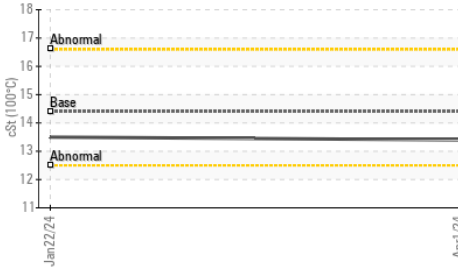

### Copper (ppm)

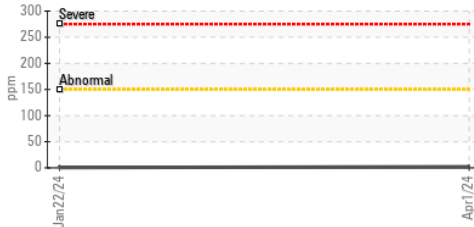

### Silicon (ppm)

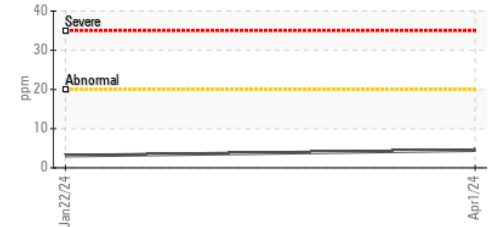

### Viscosity @ 100°C



### Base Number



Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : WC0917289

**Lab Number** : 06152802

**Unique Number** : 10982880

**Test Package** : MOB 1 ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**Received** : 18 Apr 2024

**Tested** : 19 Apr 2024

**Diagnosed** : 22 Apr 2024 - Don Baldrige

**CONCRETE SERVICE CO - FAY BLOCK**

161 BUILDERS BLVD

FAYETTEVILLE, NC

US 28301

Contact: BRYAN VANNIMAN

bryanvanniman@fayblock.com

T: (800)326-9198

F: