

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

ALSTOM 3310 Component Hydraulic System

Fluid ESSO UNIVIS N 32 (55 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	ΛΑΤΙΟΝ	method				history2
Sample Number		Client Info		WC0798954	WC0673317	WC0592279
Sample Date		Client Info		17 Apr 2024	15 Apr 2023	15 Apr 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
	NI		line it //s e e e			
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1	2	2
Chromium	ppm	ASTM D5185m	>10	3	4	5
Nickel	ppm	ASTM D5185m	>10	32	37	39
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	0	<1
Lead	ppm	ASTM D5185m	>10	12	14	16
Copper	ppm	ASTM D5185m	>75	4	4	5
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	.1	0	0	2
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	.3	0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	0	<1	<1	0
Calcium	ppm	ASTM D5185m	74	50	46	56
Phosphorus	ppm	ASTM D5185m	266	348	340	362
Zinc	ppm	ASTM D5185m	338	438	441	435
Sulfur	ppm	ASTM D5185m	000	3231	3306	2981
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<1	<1	<1
Sodium	ppm	ASTM D5185m		4	2	3
Potassium	ppm	ASTM D5185m	>20	1	0	0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	7286	2542	889
Particles >6µm		ASTM D7647	>1300	1276	573	157
Particles >14µm		ASTM D7647	>160	98	51	10
Particles >21µm		ASTM D7647		27	15	3
Particles >38µm		ASTM D7647		2	1	0
Particles >71µm		ASTM D7647	>3	0	0	0
		100 4400 4 3	-	-	-	

ISO 4406 (c) >20/17/14

Oil Cleanliness


19/16/13


17/14/10


20/17/14



OIL ANALYSIS REPORT

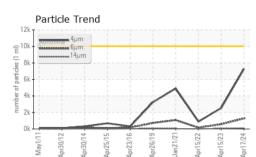

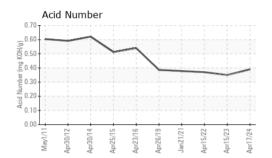





4								
2 - Base								
2 Base Abnormal								
							-	-
6-	$\overline{}$			-				
4	_	_	_	_	_	_	_	
May1/11 \pr30/12	4	5	9	6	Jan21/21	22	8	


FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.39	0.35	0.37
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32	28.5	27.5	26.6
SAMPLE IMAGES	3	method	limit/base	current	history1	history2

Color

Bottom



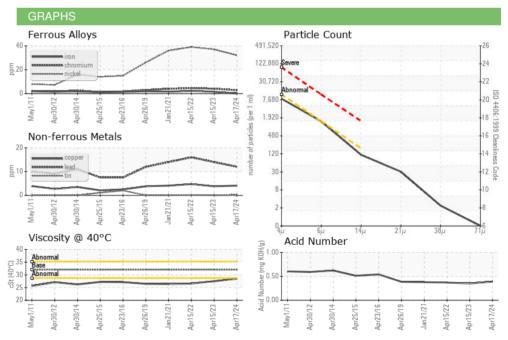

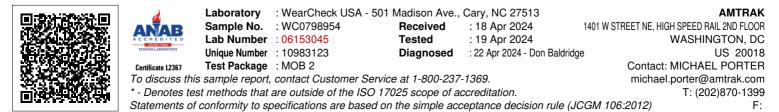

Report Id: AMTRAK [WUSCAR] 06153045 (Generated: 04/22/2024 18:23:29) Rev: 1

Contact/Location: MICHAEL PORTER - AMTRAK