




# OIL ANALYSIS REPORT

Sample Rating Trend

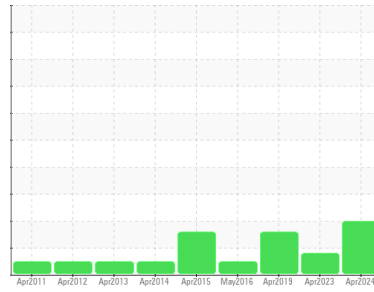

ISO



Machine Id  
**ALSTOM 3306**  
 Component  
**Hydraulic System**  
 Fluid  
**ESSO UNIVIS N 32 (55 GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0798811</b>	WC0673327	WCM2322742
Sample Date	Client Info		<b>17 Apr 2024</b>	21 Apr 2023	21 Apr 2019
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ATTENTION	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>1</b>	2	5
Chromium	ppm	ASTM D5185m >10	<b>2</b>	1	2
Nickel	ppm	ASTM D5185m >10	<b>23</b>	22	22
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>0</b>	0	<1
Lead	ppm	ASTM D5185m >10	<b>15</b>	12	10
Copper	ppm	ASTM D5185m >75	<b>9</b>	6	8
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m .1	<b>0</b>	0	<1
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m .3	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 0	<b>1</b>	1	1
Calcium	ppm	ASTM D5185m 74	<b>52</b>	53	61
Phosphorus	ppm	ASTM D5185m 266	<b>358</b>	344	363
Zinc	ppm	ASTM D5185m 338	<b>440</b>	461	454
Sulfur	ppm	ASTM D5185m	<b>3323</b>	2707	3856

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>1</b>	1	2
Sodium	ppm	ASTM D5185m	<b>4</b>	0	3
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	<1


## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	<b>▲ 23257</b>	5458	---
Particles >6µm	ASTM D7647	>1300	<b>▲ 4528</b>	● 1329	---
Particles >14µm	ASTM D7647	>160	<b>▲ 279</b>	66	---
Particles >21µm	ASTM D7647	>40	<b>▲ 75</b>	13	---
Particles >38µm	ASTM D7647	>10	<b>3</b>	1	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>20/17/14	<b>▲ 22/19/15</b>	● 20/18/13	---




# OIL ANALYSIS REPORT


## Particle Trend

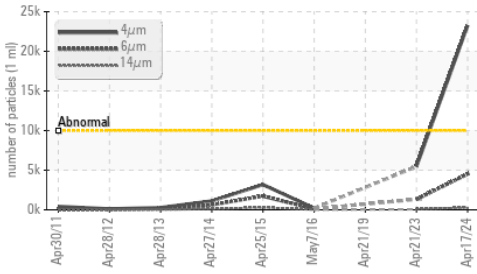


## Particle Trend

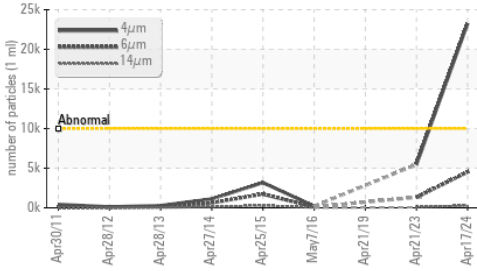

## Acid Number

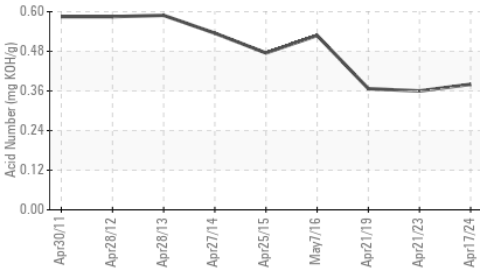

## Viscosity @ 40°C

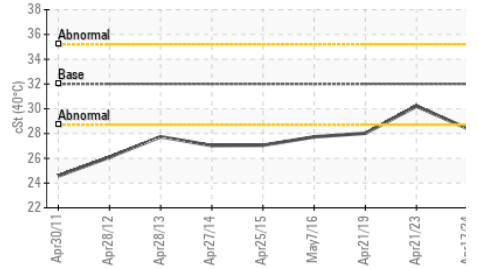


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045		<b>0.38</b>	0.36	0.367
VISUAL				
method	limit/base	current	history1	history2
White Metal scalar *Visual	NONE	<b>NONE</b>	NONE	▲ MODER
Yellow Metal scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Silt scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Debris scalar *Visual	NONE	<b>NONE</b>	NONE	▲ MODER
Sand/Dirt scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Odor scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water scalar *Visual	>0.1	<b>NEG</b>	NEG	NEG
Free Water scalar *Visual		<b>NEG</b>	NEG	NEG

## FLUID PROPERTIES


method	limit/base	current	history1	history2
Visc @ 40°C cSt ASTM D445	32	<b>28.4</b>	30.2	28.02

## SAMPLE IMAGES

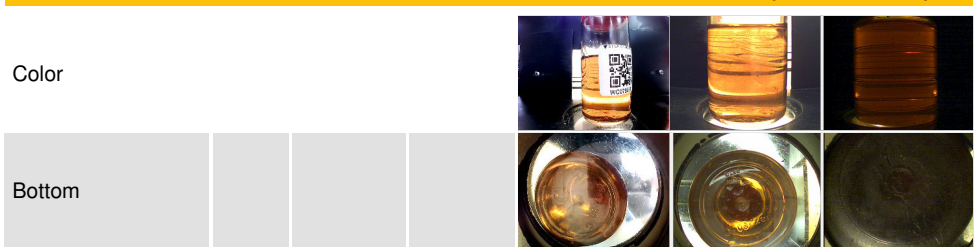


## GRAPHS


### Ferrous Alloys

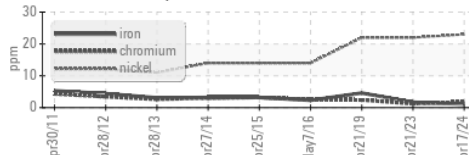


### Non-ferrous Metals

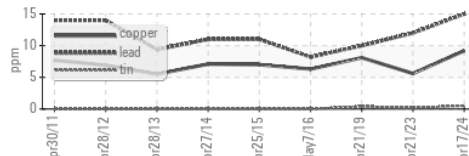

### Viscosity @ 40°C

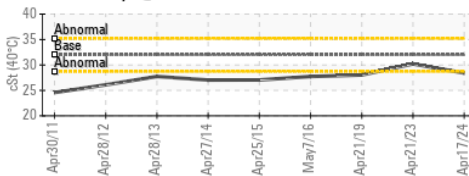

### Particle Count

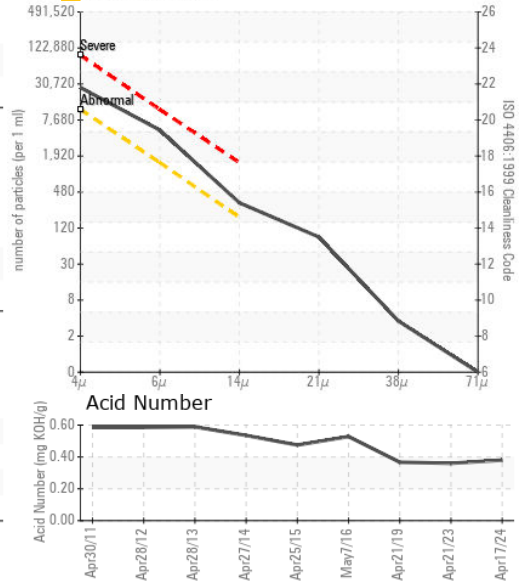

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0798811  
**Lab Number** : 06153046  
**Unique Number** : 10983124  
**Test Package** : MOB 2

**Received** : 18 Apr 2024  
**Tested** : 19 Apr 2024  
**Diagnosed** : 22 Apr 2024 - Don Baldrige

**AMTRAK**  
 1401 W STREET NE, HIGH SPEED RAIL 2ND FLOOR  
 WASHINGTON, DC  
 US 20018

Contact: MICHAEL PORTER  
 michael.porter@amtrak.com  
 T: (202)870-1399

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: