




OIL ANALYSIS REPORT

Sample Rating Trend

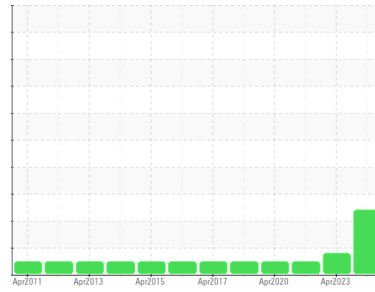

ISO



Machine Id
ALSTOM 3529
 Component
Hydraulic System
 Fluid
ESSO UNIVIS N 32 (55 GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0798939	WC0643782	WC0560236
Sample Date	Client Info			06 Apr 2024	10 Apr 2023	10 May 2021
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				ABNORMAL	ATTENTION	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	2	<1	6
Chromium	ppm	ASTM D5185m	>10	4	3	10
Nickel	ppm	ASTM D5185m	>10	12	15	35
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	14	10	19
Copper	ppm	ASTM D5185m	>75	8	4	14
Tin	ppm	ASTM D5185m	>10	<1	0	0
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	.1	0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	.3	0	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	0	3	0	2
Calcium	ppm	ASTM D5185m	74	60	45	68
Phosphorus	ppm	ASTM D5185m	266	362	366	389
Zinc	ppm	ASTM D5185m	338	476	439	514
Sulfur	ppm	ASTM D5185m		3143	2487	2918


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	1	2	4
Sodium	ppm	ASTM D5185m		4	<1	3
Potassium	ppm	ASTM D5185m	>20	1	0	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	▲ 40140	7563	805
Particles >6µm		ASTM D7647	>1300	▲ 9792	● 1402	185
Particles >14µm		ASTM D7647	>160	▲ 1036	31	16
Particles >21µm		ASTM D7647	>40	▲ 392	4	5
Particles >38µm		ASTM D7647	>10	▲ 35	0	0
Particles >71µm		ASTM D7647	>3	1	0	0
Oil Cleanliness		ISO 4406 (c)	>20/17/14	▲ 23/20/17	● 20/18/12	17/15/11




OIL ANALYSIS REPORT


▲ Particle Trend

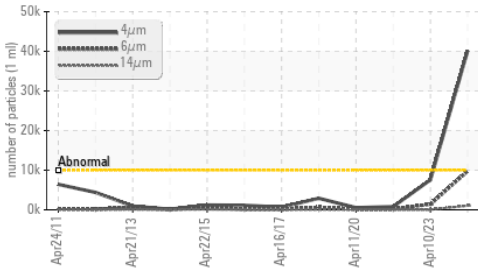


▲ Particle Trend

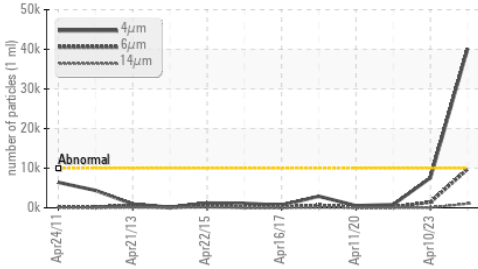

Acid Number

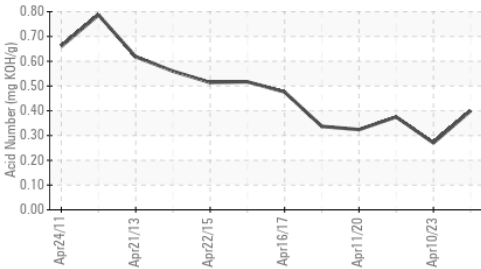

Viscosity @ 40°C

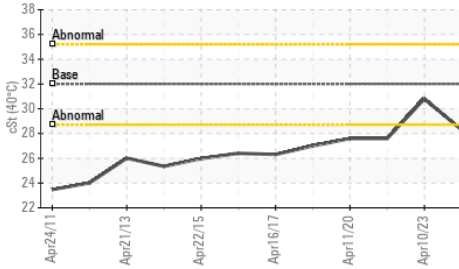


FLUID DEGRADATION method limit/base current history1 history2

Acid Number (AN)	mg KOH/g	ASTM D8045		0.40	0.27	0.375
VISUAL						
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES method limit/base current history1 history2


Visc @ 40°C	cSt	ASTM D445	32	28.3	30.8	27.6
-------------	-----	-----------	----	-------------	------	------

SAMPLE IMAGES method limit/base current history1 history2

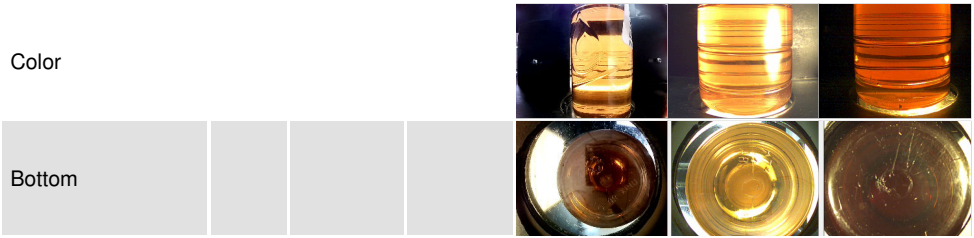


GRAPHS


Ferrous Alloys

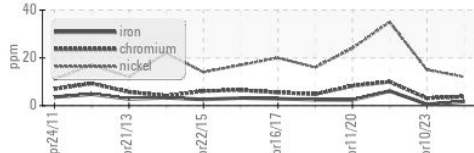


Non-ferrous Metals

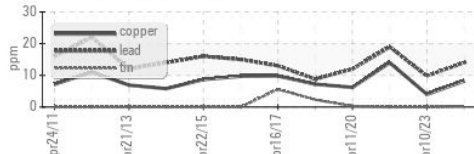


Viscosity @ 40°C

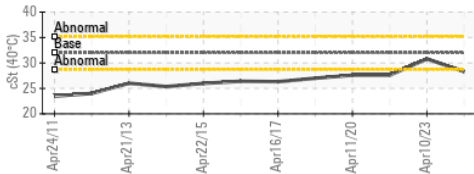

▲ Particle Count

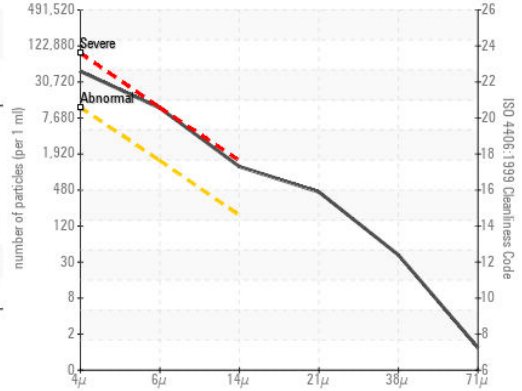

Acid Number

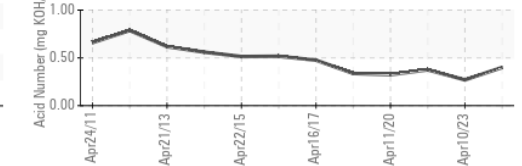

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0798939

Lab Number : 06153055

Unique Number : 10983133

Test Package : MOB 2

Received : 18 Apr 2024

Tested : 19 Apr 2024

Diagnosed : 22 Apr 2024 - Don Baldrige

AMTRAK

1401 W STREET NE, HIGH SPEED RAIL 2ND FLOOR

WASHINGTON, DC

US 20018

Contact: MICHAEL PORTER

michael.porter@amtrak.com

T: (202)870-1399

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)