

# **OIL ANALYSIS REPORT**

Sample Rating Trend

# **WEAR**

# {UNASSIGNED} **Quantum Marine**

Starboard Hydraulic System

{not provided} (--- GAL)

### DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

The iron level is marginal.


### Contamination

There is a high amount of particulates present in the oil.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PH0001785	PH0001513	
Sample Date		Client Info		17 Apr 2024	15 Apr 2024	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	Filtered	
Sample Status				ABNORMAL	NORMAL	
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<u> </u>	<1	
Chromium	ppm	ASTM D5185m	>20	0	0	
Nickel	ppm	ASTM D5185m	>20	0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>20	0	0	
Lead	ppm	ASTM D5185m	>20	0	0	
Copper	ppm	ASTM D5185m	>20	7	4	
Tin	ppm	ASTM D5185m	>20	- <1	<1	
Vanadium	ppm	ASTM D5185m	720	0	0	
Cadmium	ppm	ASTM D5185m		0	0	
	ррпп	method	limit/base			
ADDITIVES			IIIIII/Dase		history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		<1	<1	
Magnesium	ppm	ASTM D5185m		3	<1	
Calcium	ppm	ASTM D5185m		30	23	
Phosphorus	ppm	ASTM D5185m		288	303	
Zinc	ppm	ASTM D5185m		292	303	
Sulfur	ppm	ASTM D5185m		924	924	
CONTAMINANTS	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	1	<1	
Sodium	ppm	ASTM D5185m		2	3	
Potassium	ppm	ASTM D5185m	>20	1	<1	
FLUID CLEANLI	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<b>160716</b>	2328	
Particles >6µm		ASTM D7647	>2500	<b>A</b> 85519	224	
Particles >14μm		ASTM D7647	>320	<u> </u>	18	
Particles >21µm		ASTM D7647	>80	<u> </u>	4	
Particles >38µm		ASTM D7647	>20	2	0	
Particles >71µm		ASTM D7647	>4	0	0	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<u>25/24/18</u>	18/15/11	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2

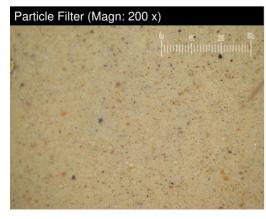

Acid Number (AN) mg KOH/g ASTM D8045 0.35



## **OIL ANALYSIS REPORT**

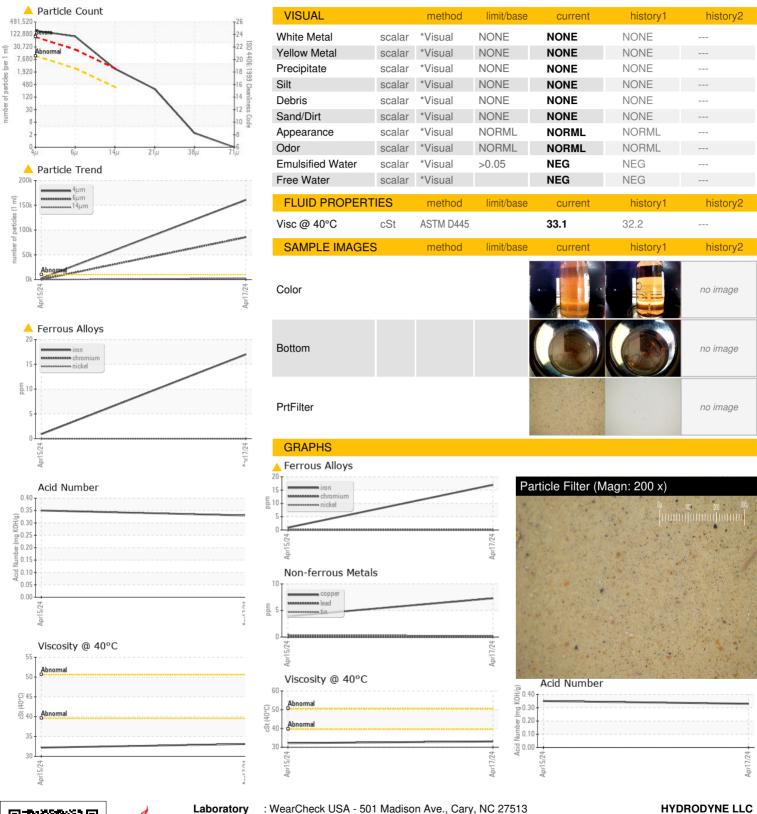





Certificate 12367

Sample No.

Laboratory

: PH0001785 Lab Number : 06153065 Unique Number : 10983143

**Tested** Diagnosed Test Package: PLANT (Additional Tests: PrtFilter)

Received

: 18 Apr 2024

: 23 Apr 2024

: 23 Apr 2024 - Jonathan Hester

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) HYDRODYNE LLC 8501 NW 64TH ST MIAMI, FL

US 33166 Contact: MIGUEL VILLANUEVA mvillanueva@hydradynellc.com

T: (305)592-8735