




# OIL ANALYSIS REPORT

## Sample Rating Trend

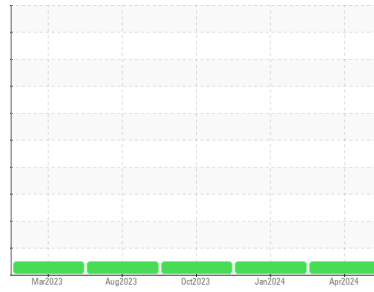

**NORMAL**



Machine Id  
**T018-02**  
 Component  
**Hydraulic System**  
 Fluid  
**FM 32 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PH0000470</b>	PH0000466	PH0000481
Sample Date	Client Info			<b>17 Apr 2024</b>	18 Jan 2024	27 Oct 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>30	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>2	<b>0</b>	0	1
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>25	<b>87</b>	85	84
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>1</b>	1	0
Calcium	ppm	ASTM D5185m		<b>6</b>	8	5
Phosphorus	ppm	ASTM D5185m		<b>305</b>	283	298
Zinc	ppm	ASTM D5185m		<b>164</b>	160	148
Sulfur	ppm	ASTM D5185m		<b>434</b>	320	277

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>2</b>	2	2
Sodium	ppm	ASTM D5185m		<b>2</b>	0	0
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	2

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	<b>805</b>	662	3156	
Particles >6µm	ASTM D7647	>2500	<b>385</b>	223	979	
Particles >14µm	ASTM D7647	>320	<b>138</b>	57	101	
Particles >21µm	ASTM D7647	>80	<b>80</b>	25	36	
Particles >38µm	ASTM D7647	>20	<b>14</b>	5	0	
Particles >71µm	ASTM D7647	>4	<b>1</b>	0	0	
Oil Cleanliness	ISO 4406 (c)	>20/18/15	<b>17/16/14</b>	17/15/13	19/17/14	





FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.41</b>	0.36	0.37

Particle Filter (Magn: 200 x)

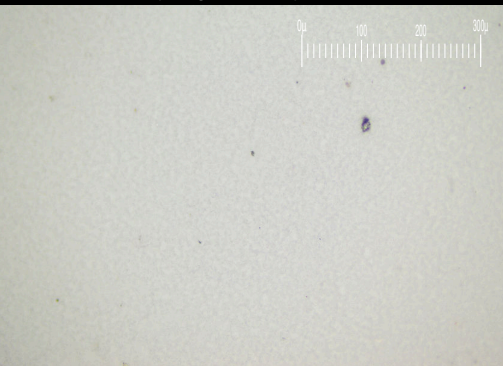




# OIL ANALYSIS REPORT

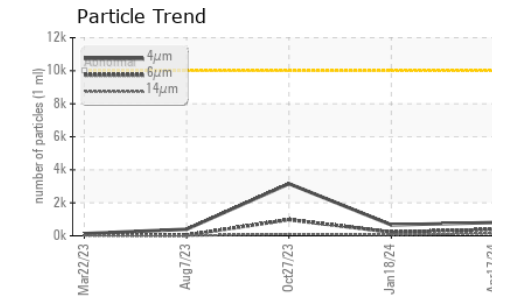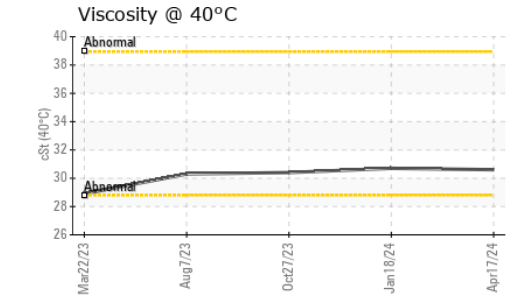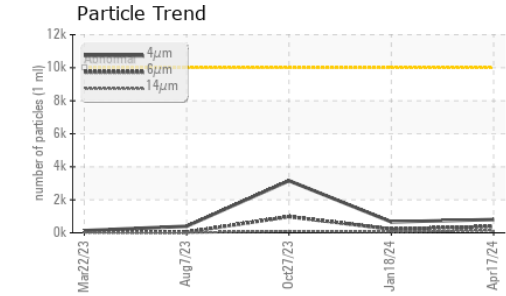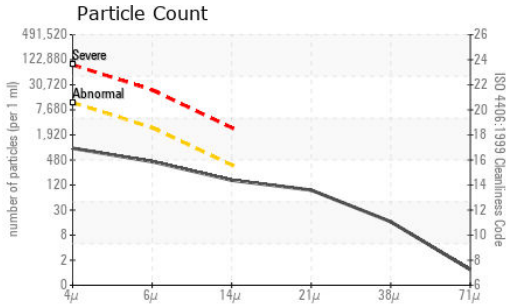






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	30.6	30.7	30.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

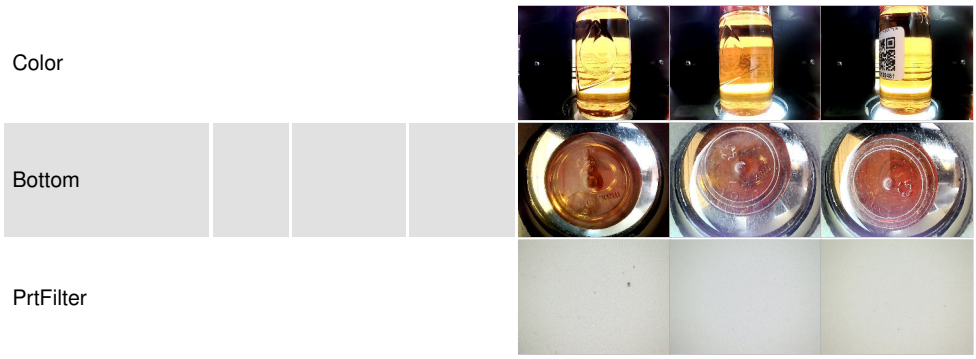

## GRAPHS

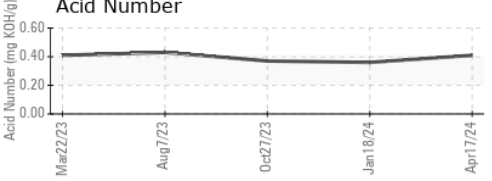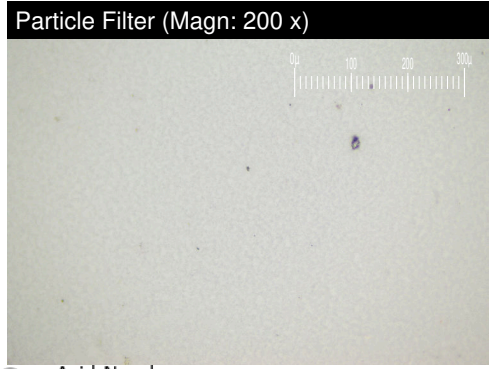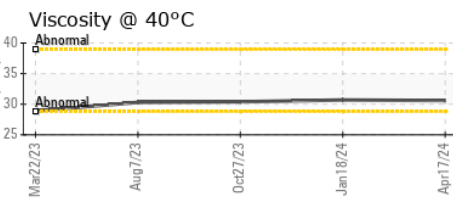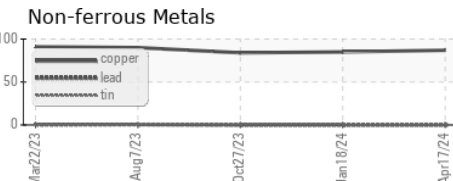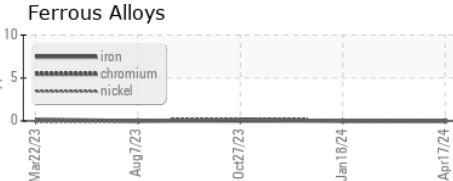

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PH0000470      **Received** : 18 Apr 2024  
**Lab Number** : 06153069      **Tested** : 23 Apr 2024  
**Unique Number** : 10983147      **Diagnosed** : 23 Apr 2024 - Jonathan Hester  
**Test Package** : PLANT ( Additional Tests: PrtFilter )

**PARKER HANNIFIN**  
 715 S IROQUOIS  
 GOODLAND, IN  
 US 47948  
 Contact: DAN SAYRE  
 dsayre@parker.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)