




# OIL ANALYSIS REPORT

Sample Rating Trend

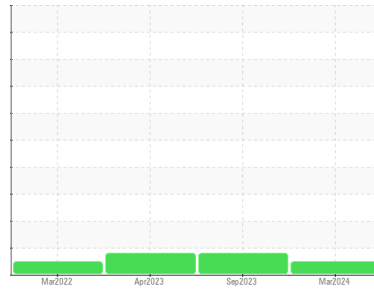

**NORMAL**



Area  
**GUAY SON [CONHER]**  
 Machine Id  
**IBACO NANDO**  
 Component  
**Transmission (Manual)**  
 Fluid  
**RALOY SAE 50 (60 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Fluid: Raloy SAE 50 )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KL0014195</b>	KL0012846	KL0012327
Sample Date	Client Info			<b>20 Mar 2024</b>	20 Sep 2023	06 Apr 2023
Machine Age	hrs	Client Info		<b>11815</b>	10886	10879
Oil Age	hrs	Client Info		<b>936</b>	1167	1160
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status				<b>NORMAL</b>	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>3</b>	32	58
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>7	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	2	<1
Lead	ppm	ASTM D5185m	>45	<b>4</b>	22	23
Copper	ppm	ASTM D5185m	>225	<b>11</b>	72	73
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	8	17
Barium	ppm	ASTM D5185m		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	2
Magnesium	ppm	ASTM D5185m		<b>7</b>	12	13
Calcium	ppm	ASTM D5185m		<b>3381</b>	3711	3949
Phosphorus	ppm	ASTM D5185m		<b>1050</b>	983	967
Zinc	ppm	ASTM D5185m		<b>945</b>	834	865
Sulfur	ppm	ASTM D5185m		<b>8276</b>	5382	5926

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>125	<b>9</b>	23	37
Sodium	ppm	ASTM D5185m		<b>4</b>	10	10
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0


FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>16136</b>	133659	129244
Particles >6µm		ASTM D7647	>2500	<b>2012</b>	▲ 26559	▲ 29970
Particles >14µm		ASTM D7647	>320	<b>47</b>	78	52
Particles >21µm		ASTM D7647	>80	<b>11</b>	11	5
Particles >38µm		ASTM D7647	>20	<b>1</b>	1	1
Particles >71µm		ASTM D7647	>4	<b>0</b>	0	1
Oil Cleanliness		ISO 4406 (c)	>18/15	<b>18/13</b>	▲ 22/13	▲ 22/13

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>1.03</b>	0.71	0.78




# OIL ANALYSIS REPORT


Particle Trend

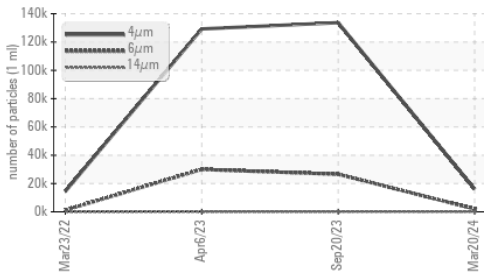


Acid Number

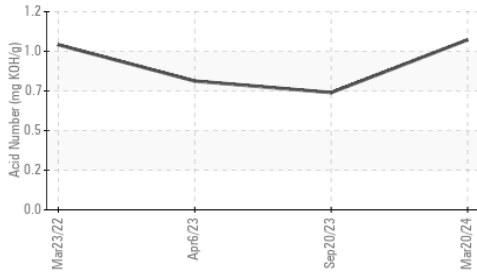

Viscosity @ 40°C

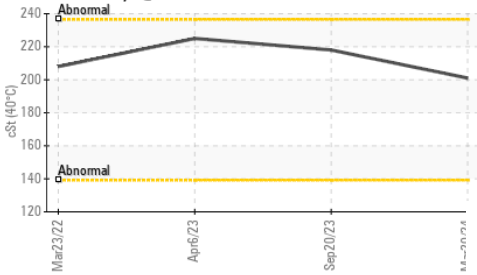


Particle Trend

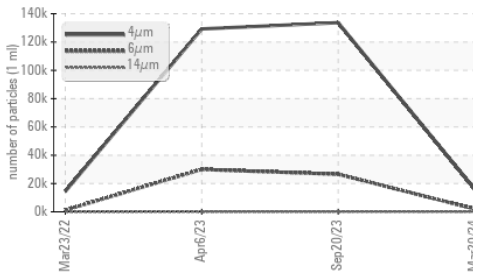




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	201	218	225

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

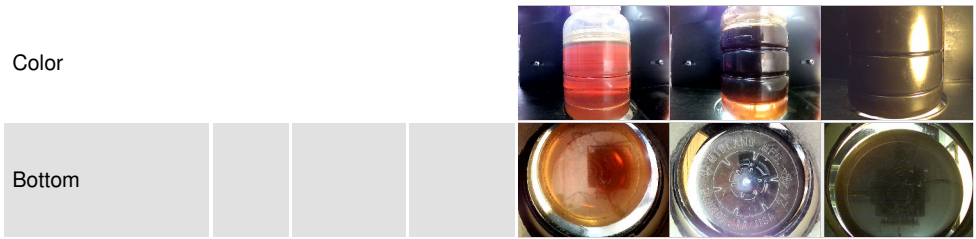

## GRAPHS

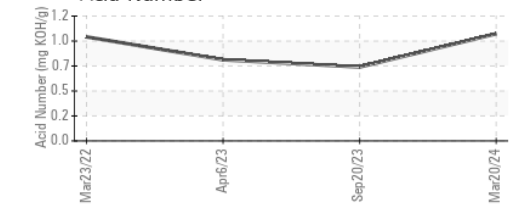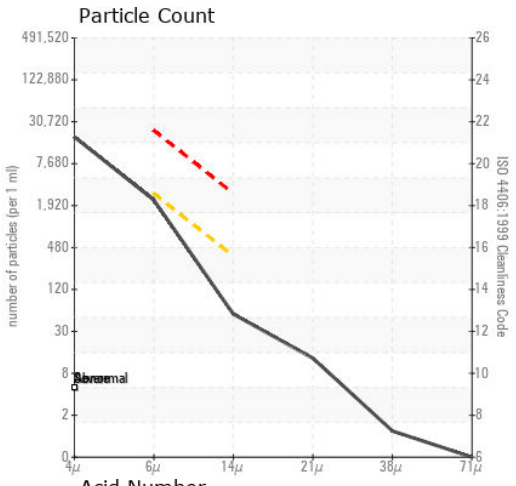

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0014195 **Received** : 18 Apr 2024  
**Lab Number** : 06153082 **Tested** : 19 Apr 2024  
**Unique Number** : 10983160 **Diagnosed** : 22 Apr 2024 - Angela Borella  
**Test Package** : MOB 2 ( Additional Tests: PrtCount )

**CONOR**  
 JUAREZ 348  
 HERMOSILLO,  
 MX 83140

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: EDUARDO GARCIA  
egarcia.comsa@gmail.com

T: (526)622-1581 x:81

F: x: