




OIL ANALYSIS REPORT



Area
IBACO [CONHER]
 Machine Id
BM Luis II
 Component
Bottom Transmission (Manual)
 Fluid
RALOY SAE 50 (38 LTR)

Sample Rating Trend

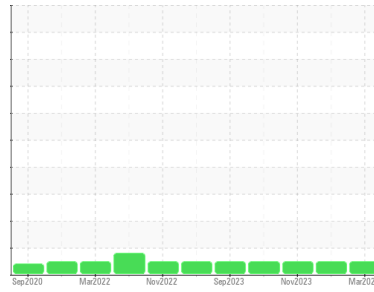

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Fluid: Raloy SAE 50)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	KL0014523	KL0013470	KL0013419	
Sample Date	Client Info	20 Mar 2024	20 Jan 2024	14 Nov 2023	
Machine Age	hrs	Client Info	19387	18637	0
Oil Age	hrs	Client Info	1571	821	283
Oil Changed	Client Info	Changed	Not Changd	Not Changd	
Sample Status		NORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >200	40	22	4
Chromium	ppm ASTM D5185m >5	0	<1	0
Nickel	ppm ASTM D5185m >5	0	0	<1
Titanium	ppm ASTM D5185m	0	<1	0
Silver	ppm ASTM D5185m >7	0	0	0
Aluminum	ppm ASTM D5185m >25	0	2	<1
Lead	ppm ASTM D5185m >45	<1	<1	<1
Copper	ppm ASTM D5185m >225	19	12	3
Tin	ppm ASTM D5185m >10	<1	<1	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	<1

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	15	15	14
Barium	ppm ASTM D5185m	0	0	0
Molybdenum	ppm ASTM D5185m	8	10	8
Manganese	ppm ASTM D5185m	1	<1	<1
Magnesium	ppm ASTM D5185m	57	59	61
Calcium	ppm ASTM D5185m	2529	2680	2576
Phosphorus	ppm ASTM D5185m	803	802	857
Zinc	ppm ASTM D5185m	764	801	827
Sulfur	ppm ASTM D5185m	5571	5702	5167

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >125	6	8	5
Sodium	ppm ASTM D5185m	9	4	<1
Potassium	ppm ASTM D5185m >20	<1	2	<1

FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	18443	16958	6864
Particles >6µm	ASTM D7647 >2500	1008	1261	422
Particles >14µm	ASTM D7647 >320	34	89	27
Particles >21µm	ASTM D7647 >80	10	26	6
Particles >38µm	ASTM D7647 >20	1	2	0
Particles >71µm	ASTM D7647 >4	0	0	0
Oil Cleanliness	ISO 4406 (c) >18/15	17/12	17/14	16/12

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	0.77	0.83	0.82




OIL ANALYSIS REPORT

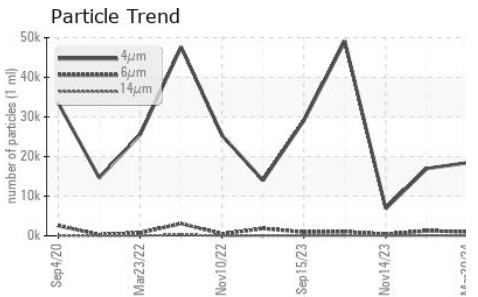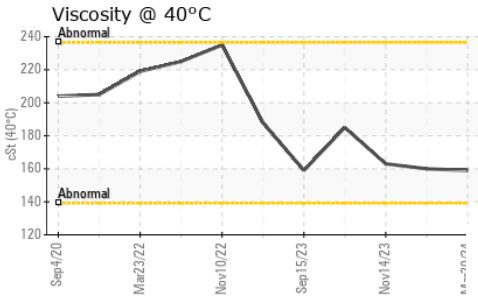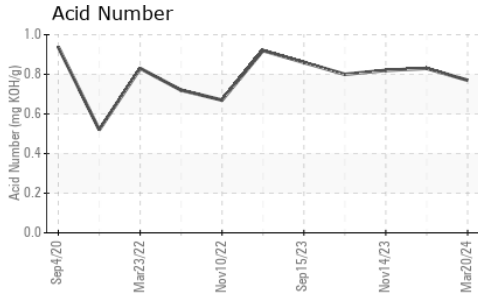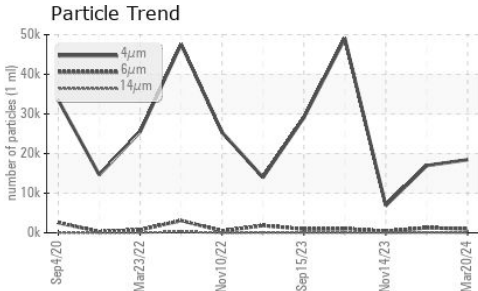






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	159	160	163

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

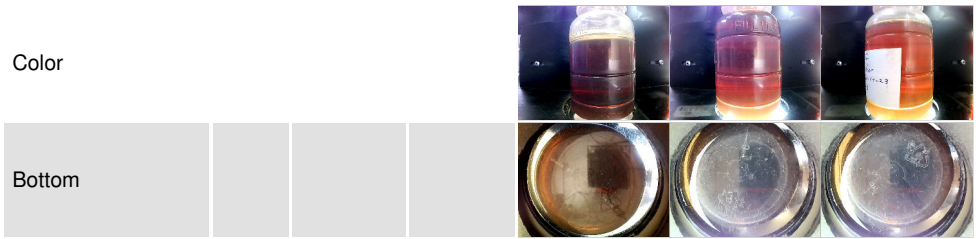

GRAPHS

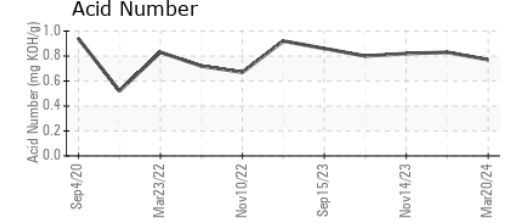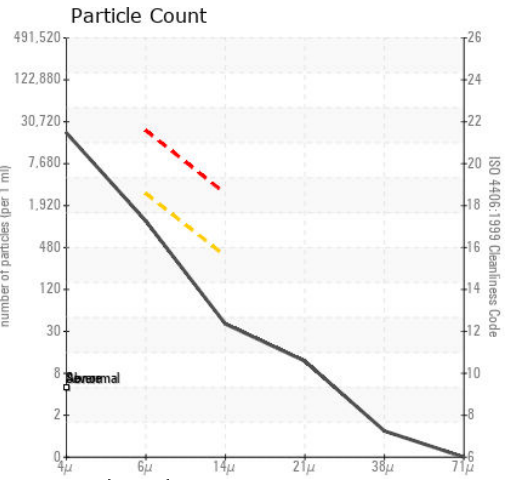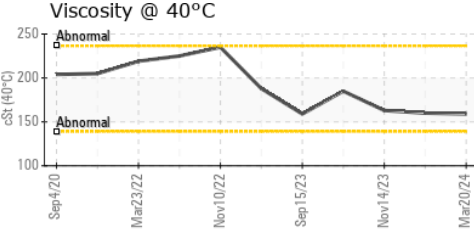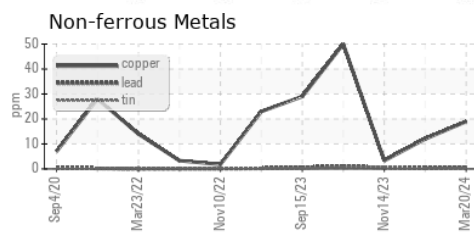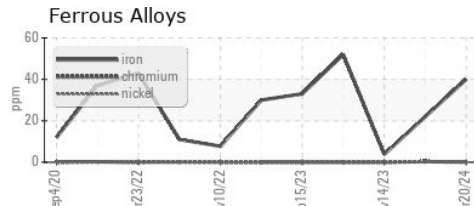

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0014523 **Received** : 18 Apr 2024
Lab Number : 06153083 **Tested** : 19 Apr 2024
Unique Number : 10983161 **Diagnosed** : 22 Apr 2024 - Angela Borella
Test Package : MOB 2 (Additional Tests: PrtCount)

CONOR
 JUAREZ 348
 HERMOSILLO,
 MX 83140
 Contact: EDUARDO GARCIA
 egarcia.comsa@gmail.com
 T: (526)622-1581 x:81
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)