

## **OIL ANALYSIS REPORT**

Area GUAY SON [CONHER] Máquina principal Mantito I

Transmission (Manual) Fluid RALOY SAE 50 (60 LTR)

#### DIAGNOSIS

## Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Fluid: Raloy SAE 50 )

## Wear


All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

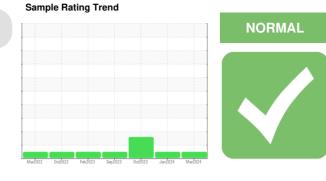


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		KL0014528	KL0013473	KL0013326	
Sample Date		Client Info		20 Mar 2024	24 Jan 2024	24 Oct 2023	
Machine Age	hrs	Client Info		0	0	10780	
Oil Age	hrs	Client Info		0	156	617	
Oil Changed		Client Info		N/A	Not Changd	Not Changd	
Sample Status				NORMAL	NORMAL	ABNORMAL	
CONTAMINATIO	N	method	limit/base	current	history1	history2	
Water		WC Method	>0.1	NEG	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	0	2	3	
Chromium	ppm	ASTM D5185m	>5	0	<1	0	
Nickel	ppm	ASTM D5185m	>5	0	0	0	
Titanium	ppm	ASTM D5185m		0	<1	<1	
Silver	ppm	ASTM D5185m	>7	0	0	0	
Aluminum	ppm	ASTM D5185m	>25	0	2	<1	
Lead	ppm	ASTM D5185m	>45	<1	<1	2	
Copper	ppm	ASTM D5185m	>225	<1	1	2	
Tin	ppm	ASTM D5185m	>10	<1	<1	<1	
Vanadium	ppm	ASTM D5185m		0	0	<1	
Cadmium	ppm	ASTM D5185m		0	<1	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	0	
Barium	ppm	ASTM D5185m		0	0	0	
Molybdenum	ppm	ASTM D5185m		0	<1	<1	
Manganese	ppm	ASTM D5185m		<1	<1	<1	
Magnesium	ppm	ASTM D5185m		6	5	10	
Calcium	ppm	ASTM D5185m		3199	3240	3135	
Phosphorus	ppm	ASTM D5185m		986	891	898	
Zinc	ppm	ASTM D5185m		808	831	764	
Sulfur	ppm	ASTM D5185m		6626	6030	5231	
CONTAMINANTS	6	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>125	5	5	7	
Sodium	ppm	ASTM D5185m		3	0	2	
Potassium	ppm	ASTM D5185m	>20	0	3	2	
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647		6062	7118	28483	
Particles >6µm		ASTM D7647		1508	2500	▲ 6453	
Particles >14µm		ASTM D7647	>320	91	119	<b>▲</b> 734	
Particles >21µm		ASTM D7647		22	15	<u> </u>	
Particles >38µm		ASTM D7647	>20	1	1	8	
Particles >71µm		ASTM D7647		0	0	0	
Oil Cleanliness		ISO 4406 (c)	>18/15	18/14	18/14	<b>2</b> 0/17	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045		0.53	0.64	0.59	
7:25:58) Rev: 1				Submitted By: EDUARDO GARCIA			


Report Id: CONHERKL [WUSCAR] 06153086 (Generated: 04/22/2024 17:25:58) Rev: 1


Submitted By: EDUARDO GARCIA Page 1 of 2



# **OIL ANALYSIS REPORT**

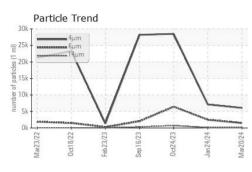





Oct24/23 .

l jo jok

5

01

Mar23/22

Oct18/22


Feb23/23

Sep16/23

Certificate 12367

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		205	199	224
SAMPLE IMAGES	;	method				history2
Color						

Bottom

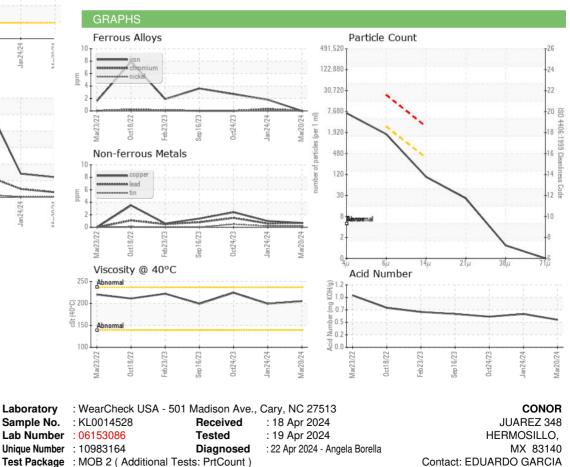

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) Report Id: CONHERKL [WUSCAR] 06153086 (Generated: 04/22/2024 17:25:58) Rev: 1

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Submitted By: EDUARDO GARCIA

Page 2 of 2

F: x:

egarcia.comsa@gmail.com

T: (526)622-1581 x:81