

# **OIL ANALYSIS REPORT**

Area
PLOGER
Machine Id 116 - PLOGER

Component Transmission (Auto)

# {not provided} (--- GAL)

### DIAGNOSIS

#### Recommendation

We advise that you check all areas where dirt can enter the system. We recommend you service the filters on this component if applicable. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear


All component wear rates are normal.

#### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the fluid. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

### **Fluid Condition**

The AN level is acceptable for this fluid.

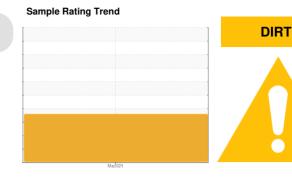

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0900777		
Sample Date		Client Info		07 Mar 2024		
Machine Age	mls	Client Info		789258		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>160	70		
Chromium	ppm	ASTM D5185m	>5	<1		
Nickel	ppm	ASTM D5185m	>5	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>5	0		
Aluminum	ppm	ASTM D5185m	>50	<u>24</u>		
Lead	ppm	ASTM D5185m	>50	<1		
Copper	ppm	ASTM D5185m	>225	144		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		81		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		6		
Magnesium	ppm	ASTM D5185m		2		
Calcium	ppm	ASTM D5185m		330		
Phosphorus	ppm	ASTM D5185m		402		
Zinc	ppm	ASTM D5185m		50		
Sulfur	ppm	ASTM D5185m		2654		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<u>▲</u> 58		
Sodium	ppm	ASTM D5185m		3		
Potassium	ppm	ASTM D5185m	>20	2		
Water	%	ASTM D6304	>0.1	0.019		
ppm Water	ppm	ASTM D6304		193		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<u> </u>		
Particles >6µm		ASTM D7647	>2500	<u> </u>		
Particles >14μm		ASTM D7647	>320	241		
Particles >21µm		ASTM D7647	>80	42		
Particles >38µm		ASTM D7647	>20	1		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<u>4</u> 24/21/15		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
A : 1 N	ma 1/011/a	ACTM DODAE		0.00		


Acid Number (AN)

mg KOH/g ASTM D8045

0.89



## **OIL ANALYSIS REPORT**

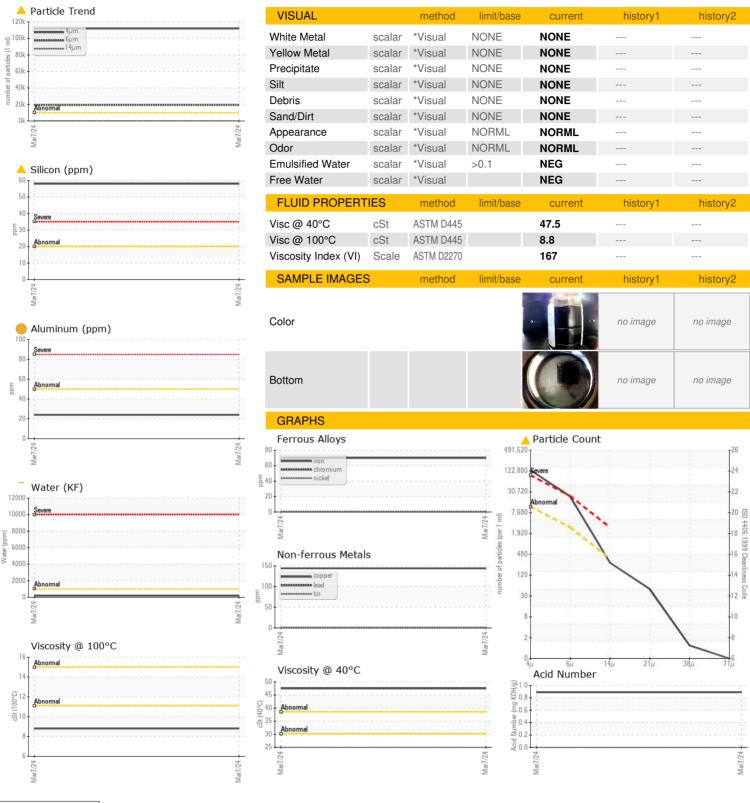



Certificate 12367

Laboratory Sample No.

Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0900777 : 06153101 Unique Number: 10983179

**Tested** : 22 Apr 2024 : 22 Apr 2024 - Angela Borella Diagnosed

Received

: 18 Apr 2024

Test Package : MOB 2 ( Additional Tests: KF, KV100, PrtCount, VI ) To discuss this sample report, contact Customer Service at 1-800-237-1369.

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

**BASF - GIANNA CREDAROLI** 

500 WHITE PLAINS RD TARRYTOWN, NY US 10591

Contact: GIANNA CREDAROLI gianna.credaroli@basf.com

T: Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: