




OIL ANALYSIS REPORT

Sample Rating Trend

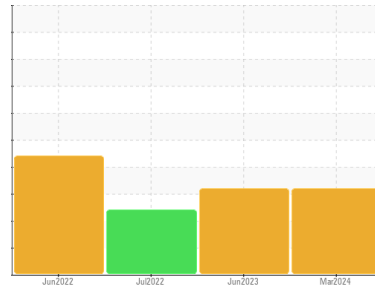

DEGRADATION



Area
PLOGER
 Machine Id
821 - PLOGER
 Component
Transmission (Manual)
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation

We recommend that you drain the fluid from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

The aluminum level is abnormal. All other component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the fluid.

Fluid Condition

The AN level is above the recommended limit. The fluid is no longer serviceable.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0900784	WC0843166	WC0712528
Sample Date	Client Info		30 Mar 2024	27 Jun 2023	12 Jul 2022
Machine Age	mls	Client Info	339113	253081	135865
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	108	96	73
Chromium	ppm	ASTM D5185m	>5	2	2	2
Nickel	ppm	ASTM D5185m	>5	<1	<1	1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>7	0	0	<1
Aluminum	ppm	ASTM D5185m	>25	▲ 34	▲ 32	24
Lead	ppm	ASTM D5185m	>45	<1	0	2
Copper	ppm	ASTM D5185m	>225	164	153	118
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		266	128	272
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	2
Manganese	ppm	ASTM D5185m		20	20	19
Magnesium	ppm	ASTM D5185m		2	<1	2
Calcium	ppm	ASTM D5185m		191	180	178
Phosphorus	ppm	ASTM D5185m		1321	1239	1144
Zinc	ppm	ASTM D5185m		20	17	17
Sulfur	ppm	ASTM D5185m		1058	1166	1032

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>125	11	11	17
Sodium	ppm	ASTM D5185m		4	2	<1
Potassium	ppm	ASTM D5185m	>20	2	<1	<1
Water	%	ASTM D6304	>0.1	0.048	0.097	0.078
ppm Water	ppm	ASTM D6304	>1000	488	970.0	783.6

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	▲ 63629	▲ 66429	▲ 137316
Particles >6µm	ASTM D7647	>2500	▲ 5499	● 2873	▲ 7007
Particles >14µm	ASTM D7647	>320	170	46	66
Particles >21µm	ASTM D7647	>80	38	10	9
Particles >38µm	ASTM D7647	>20	1	0	0
Particles >71µm	ASTM D7647	>4	0	0	0
Oil Cleanliness	ISO 4406 (c)	>20/18/15	▲ 23/20/15	▲ 23/19/13	▲ 24/20/13

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	▲ 3.71	▲ 4.08	▲ 3.40



OIL ANALYSIS REPORT

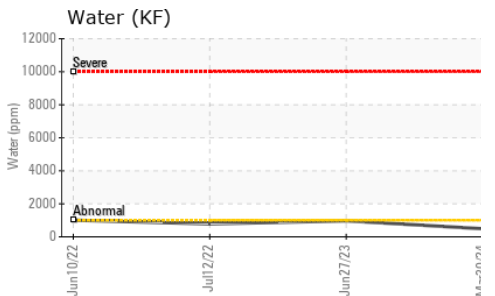
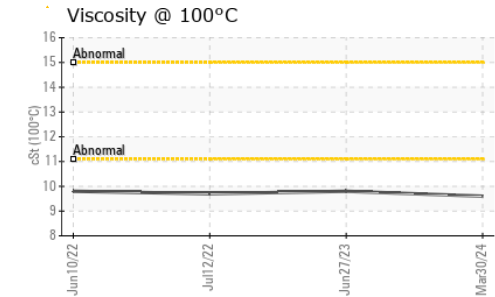
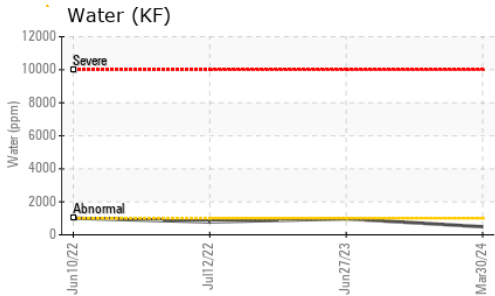
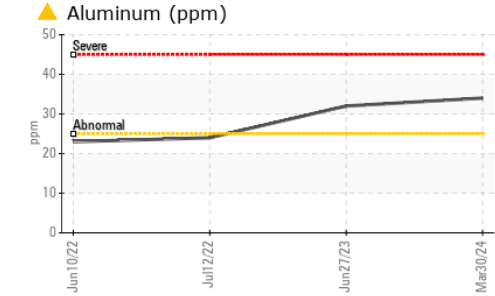
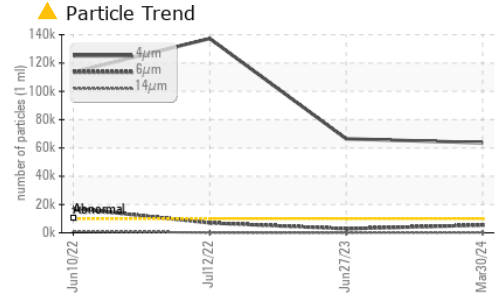


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

PARAMETER	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	56.2	56.5	56.2
Visc @ 100°C	cSt	ASTM D445	9.6	9.8	9.7
Viscosity Index (VI)	Scale	ASTM D2270	155	159	158

PARAMETER	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

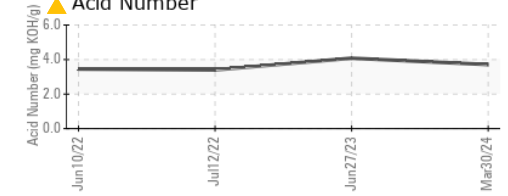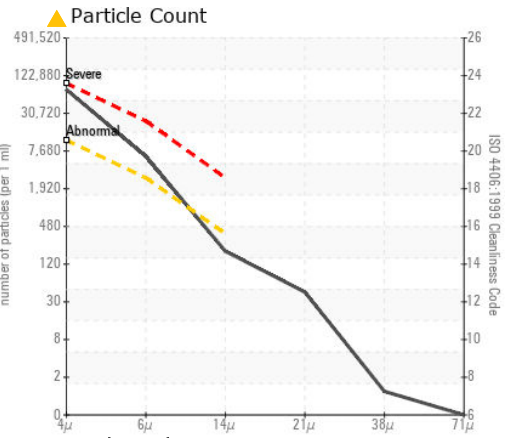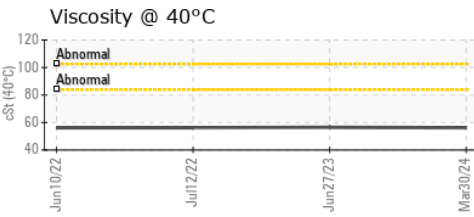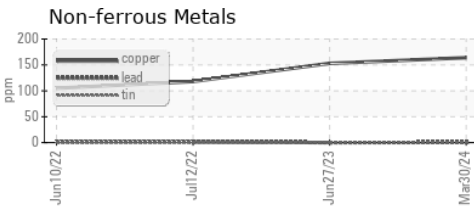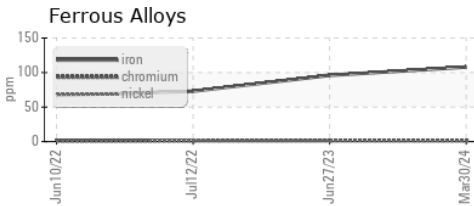

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0900784 **Received** : 18 Apr 2024
Lab Number : 06153102 **Tested** : 19 Apr 2024
Unique Number : 10983180 **Diagnosed** : 22 Apr 2024 - Angela Borella
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)