

OIL ANALYSIS REPORT

Area CAMERON [200004662] C-20 (S/N 22201) Brake

Fluid {not provided} (--- LTR)

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

				Apr2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		NX015436		
Sample Date		Client Info		09 Apr 2024		
Machine Age	hrs	Client Info		0 401 2024		
Oil Age	hrs	Client Info		0		
Oil Changed	1110	Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		19		
Iron	ppm	ASTM D5185m	>350	30		
Chromium	ppm	ASTM D5185m	>5	0		
Nickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m	-	0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>8	0		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m	>150	3		
Tin	ppm	ASTM D5185m	>5	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		46		
Calcium	ppm	ASTM D5185m		22		
Phosphorus	ppm	ASTM D5185m		303		
Zinc	ppm	ASTM D5185m		326		
Sulfur	ppm	ASTM D5185m		3862		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		1		
Sodium	ppm	ASTM D5185m		3		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304	>0.2	0.006		
ppm Water	ppm	ASTM D6304	>2000	66		
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	<mark> </mark> 28321		
Particles >6µm		ASTM D7647	>5000	2938		
Particles >14µm		ASTM D7647	>640	78		
Particles >21µm		ASTM D7647	>160	20		
Particles >38µm		ASTM D7647	>40	1		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>21/19/16	e 22/19/13		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2

Acid Number (AN)

Report Id: NORDEX [WUSCAR] 06153120 (Generated: 04/22/2024 17:09:55) Rev: 1

mg KOH/g ASTM D8045

0.39 Contact/Location: DEVIN LINEHAN - NORDEX Page 1 of 2







OIL ANALYSIS REPORT

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

33.1

Particle Count

491.5 122,88

> 30.72 7.680

> > 1,920

480

120

31

(B)

HOX 0.30

Acid

.or9/24

0.20

0.00

Apr9/24 (per 1 ml)

cles

no image

no image


no image

no imade

4406

:1999 Cle

14

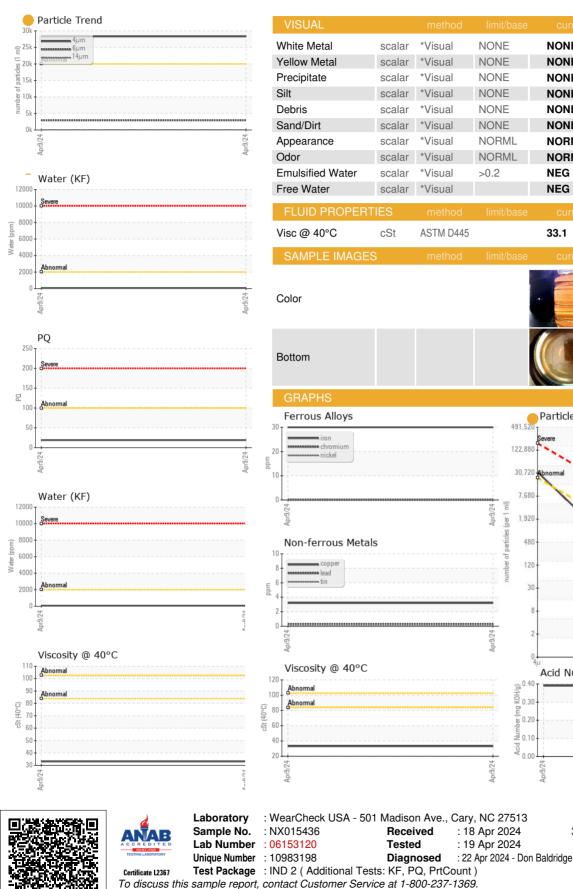

NORDEX USA - Chicago 300 SOUTH WACKER DRIVE, SUITE 1500 CHICAGO, IL US 60606 Contact: DEVIN LINEHAN DLinehan@nordex-online.com T: (312)386-4124 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (312)386-7102

Report Id: NORDEX [WUSCAR] 06153120 (Generated: 04/22/2024 17:09:55) Rev: 1

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Contact/Location: DEVIN LINEHAN - NORDEX

14

Acid Number

21µ

38L