

OIL ANALYSIS REPORT

Area CAMERON [200004662] C-24 (S/N 22205) Brake

Fluid {not provided} (--- LTR)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|------------------|-----------|--------------|------------|-------------|----------|----------|
| Sample Number | | Client Info | | NX015425 | | |
| Sample Date | | Client Info | | 14 Mar 2024 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | ABNORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| PQ | | ASTM D8184 | | 25 | | |
| ron | ppm | ASTM D5185m | >350 | 84 | | |
| Chromium | ppm | ASTM D5185m | >5 | <1 | | |
| Nickel | ppm | ASTM D5185m | >5 | 0 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >8 | 0 | | |
| Lead | ppm | ASTM D5185m | >10 | 0 | | |
| Copper | ppm | ASTM D5185m | >150 | 3 | | |
| Tin | ppm | ASTM D5185m | >5 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | 0 | | |
| Volybdenum | ppm | ASTM D5185m | | 0 | | |
| Vanganese | ppm | ASTM D5185m | | 1 | | |
| Vagnesium | ppm | ASTM D5185m | | 10 | | |
| Calcium | ppm | ASTM D5185m | | 23 | | |
| Phosphorus | ppm | ASTM D5185m | | 271 | | |
| Zinc | ppm | ASTM D5185m | | 245 | | |
| Sulfur | ppm | ASTM D5185m | | 10165 | | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >400 | 4 | | |
| Sodium | ppm | ASTM D5185m | 2 100 | 4 | | |
| Potassium | ppm | ASTM D5185m | >20 | 2 | | |
| Water | % | ASTM D6304 | | 0.001 | | |
| opm Water | ppm | ASTM D6304 | >2000 | 6 | | |
| FLUID CLEANLINI | | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >20000 | ▲ 72402 | | |
| Particles >6µm | | ASTM D7647 | >5000 | 5727 | | |
| Particles >14µm | | ASTM D7647 | >640 | 63 | | |
| Particles >21µm | | ASTM D7647 | | 9 | | |
| Particles >38µm | | ASTM D7647 | >40 | 1 | | |
| Particles >71µm | | ASTM D7647 | | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >21/19/16 | ▲ 23/20/13 | | |
| FLUID DEGRADA | | | | | historid | history |
| | | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | ma K()H/a | ASTM D8045 | | 0.33 | | |

Sample Rating Trend

Acid Number (AN) Report Id: NORDEX [WUSCAR] 06153121 (Generated: 04/22/2024 17:10:47) Rev: 1


mg KOH/g ASTM D8045

0.33 Contact/Location: DEVIN LINEHAN - NORDEX Page 1 of 2





OIL ANALYSIS REPORT

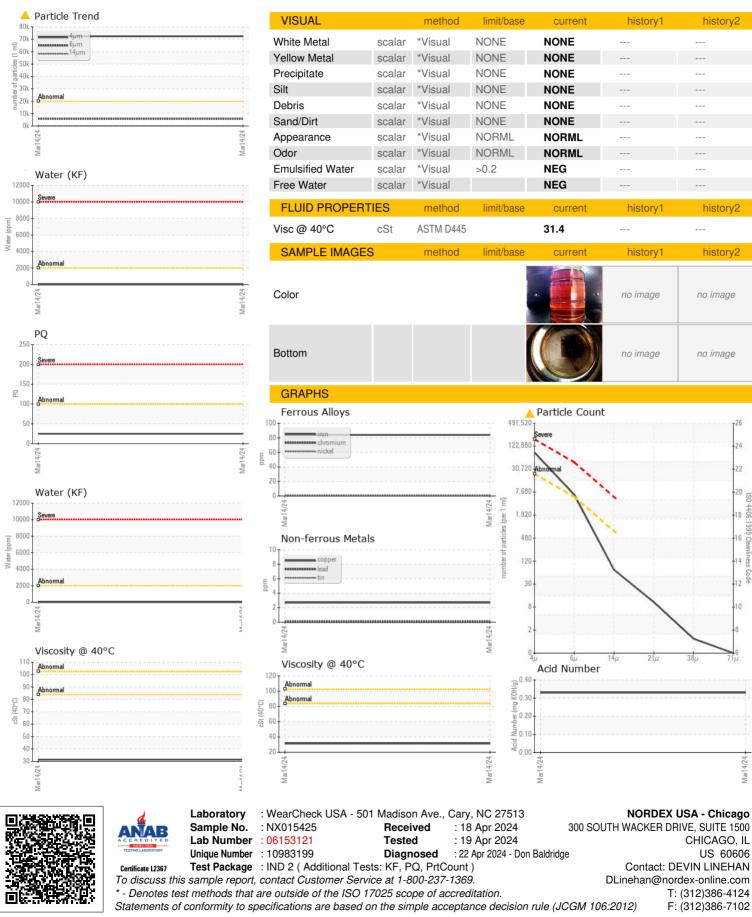

Report Id: NORDEX [WUSCAR] 06153121 (Generated: 04/22/2024 17:10:47) Rev: 1

Contact/Location: DEVIN LINEHAN - NORDEX

4406

:1999 Cle

14

4/24

Marl