

OIL ANALYSIS REPORT


Area

CAMERON [200004662] **C-18** (S/N 22199)

Wind Turbine Gearbox

Fluid

{not provided} (--- LTR)

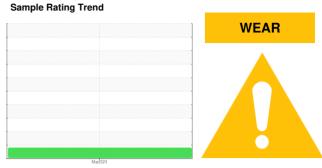

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

A Waar

The iron level is abnormal. All other component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Mar2024	,	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		NX015422		
Sample Date		Client Info		04 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>50	18		
Iron	ppm	ASTM D5185m	>30	4 38		
Chromium	ppm	ASTM D5185m	>3	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>10	0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>30	0		
Lead	ppm	ASTM D5185m	>15	3		
Copper	ppm	ASTM D5185m	>10	<1		
Tin	ppm	ASTM D5185m		<1		
Vanadium	ppm	ASTM D5185m	>10	0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		3		
Phosphorus	ppm	ASTM D5185m		198		
Zinc	ppm	ASTM D5185m		73		
Sulfur	ppm	ASTM D5185m		4609		
			1111-/1			
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+15	0		
Sodium	ppm	ASTM D5185m	0.0	21		
Potassium	ppm	ASTM D5185m	>20	5		
Water	%	ASTM D6304	>0.02	0.003		
ppm Water	ppm	ASTM D6304	>200	31		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		354		
Particles >6µm		ASTM D7647		127		
Particles >14μm		ASTM D7647	>40	19		
Particles >21µm		ASTM D7647	>10	6		
Particles >38μm		ASTM D7647	>3	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/15/12	16/14/11		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

Acid Number (AN)


mg KOH/g ASTM D8045

0.57 --- ---

Contact/Location: DEVIN LINEHAN - NORDEX



OIL ANALYSIS REPORT

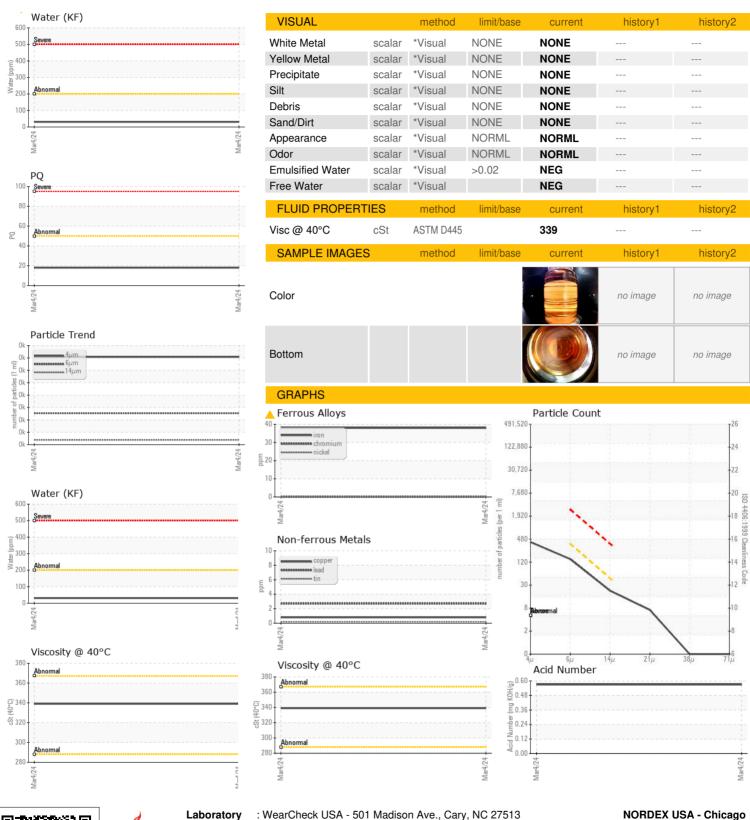



Certificate 12367

Laboratory Sample No.

: NX015422 Lab Number : 06153131 Unique Number: 10983209

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested**

Test Package : IND 2 (Additional Tests: KF, PQ, PrtCount)

: 18 Apr 2024 : 19 Apr 2024 Diagnosed : 22 Apr 2024 - Don Baldridge

300 SOUTH WACKER DRIVE, SUITE 1500

US 60606 Contact: DEVIN LINEHAN DLinehan@nordex-online.com

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

T: (312)386-4124 F: (312)386-7102 Contact/Location: DEVIN LINEHAN - NORDEX

CHICAGO, IL